

DOUBLE INLET FORWARD CURVED IMPELLER 150 SERIES




Technical Specification*

TYPE	I/P SUPPLY	AMPS (A)	WATTS (W)	RPM	AIRFLOW		STATIC-PR (mm-wc)	dBA	CAP. μ f	ADMISSIBLE AMBIENT TEMP	WEIGHT Kg
					(CMH)	(CFM)					
SDB 150 S2	230V, 1 $\emptyset$, 50Hz	2	450	2700	1200	706	50	76	12.5	60	8.5
SDB 150 T2	415V, 3 $\emptyset$, 50Hz	0.75	430	2600	1200	706	50	76	..	60	8.5
SDB 150 S4	230V, 1 $\emptyset$, 50Hz	0.4	100	1440	620	365	14	61	4	60	8.5
SDB 150 T4	415V, 3 $\emptyset$, 50Hz	0.65	130	1450	620	365	14	61	..	60	8.5

*Tolerance $\pm 5\%$ on Specified values

Dimensional Drawing

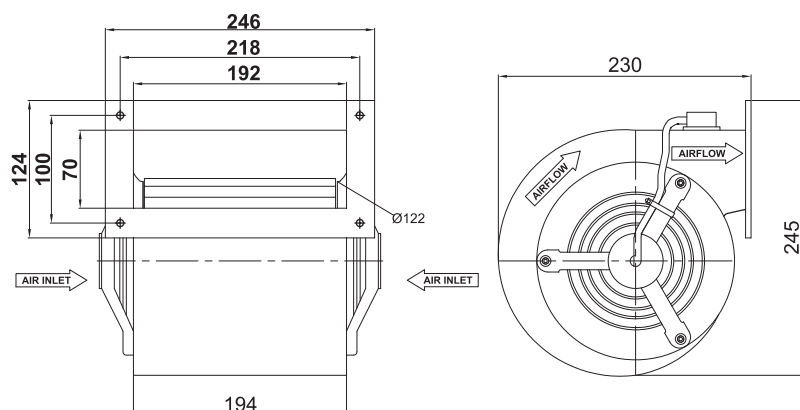

Performance Chart

