

DOUBLE INLET FORWARD CURVED IMPELLER 180 SERIES




Technical Specification*

TYPE	I/P SUPPLY	AMPS (A)	WATTS (W)	RPM	AIRFLOW		STATIC-PR (mm-wc)	dBA	CAP. μ f	ADMISSIBLE AMBIENT TEMP	WEIGHT Kg
					(CMH)	(CFM)					
SDB 180 S2	230V, 1 $\emptyset$, 50Hz	4.2	950	2550	2150	1265	70	80	15	60	14
SDB 180 T2	415V, 3 $\emptyset$, 50Hz	1.25	750	2550	2150	1265	70	80	..	60	14
SDB 180 S4	230V, 1 $\emptyset$, 50Hz	1.2	260	1350	1300	765	22	67	8	60	14

*Tolerance $\pm 5\%$ on Specified values

Dimensional Drawing

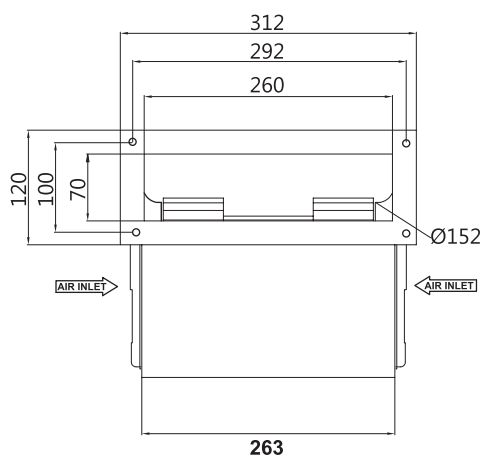

Performance Chart

