

DOUBLE INLET FORWARD CURVED IMPELLER 200-255 SERIES




Technical Specification*

TYPE	I/P SUPPLY	AMPS (A)	WATTS (W)	RPM	AIRFLOW		STATIC-PR (mm-wc)	dBA	CAP. μf	ADMISSIBLE AMBIENT TEMP	WEIGHT Kg
					(CMH)	(CFM)					
SDB 200 T2	415V, 3Ø, 50Hz	2.6	1500	2700	2600	1529	85	85	..	60	18
SDB 220 T2	415V, 3Ø, 50Hz	2.80	1600	2600	2800	1647	115	87	..	60	19
SDB 220 S4	230V, 1Ø, 50Hz	2	500	1400	1650	971	30	70	12.5	60	16
SDB 220 T4	415V, 3Ø, 50Hz	0.7	360	1400	1650	971	30	70	..	60	16
SDB 240 S4	230V, 1Ø, 50Hz	2.7	650	1400	2750	1618	40	72	15	60	19
SDB 240 T4	415V, 3Ø, 50Hz	1.2	750	1400	2750	1618	40	72	..	60	20
SDB 255 T4	415V, 3Ø, 50Hz	3.2	1250	1400	3400	2000	75	85	..	60	24

*Tolerance ±5% on Specified values

PRODUCT DRAWING

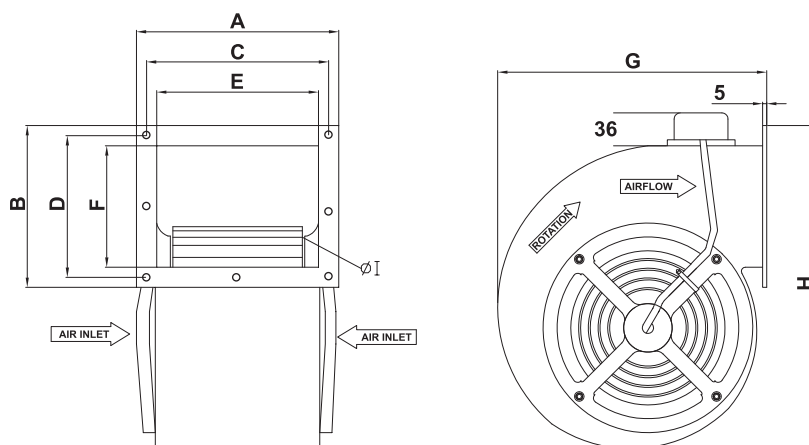

Dimensional Details

TYPE	A	B	C	D	E	F	G	H	I
SDB 200 T2	250	200	225	175	200	150	333	398	180
SDB 220 SERIES	250	200	225	175	200	150	333	398	170
SDB 240 S4	290	190	265	165	240	140	341	408	200
SDB 255 T4	362	325	332	295	300	140	381	418	210

Note: ALL DIMENSIONS ARE IN mm

Performance Chart

