

DOUBLE INLET BACKWARD CURVED IMPELLER 250 SERIES




Technical Specification*

TYPE	I/P SUPPLY	AMPS (A)	WATTS (W)	RPM	AIRFLOW		STATIC-PR (mm-wc)	dBa	CAP. μ f	ADMISSIBLE AMBIENT TEMP	WEIGHT Kg
					(CMH)	(CFM)					
SDB 250 BC S2	230V, 1 $\emptyset$, 50Hz	2.0	450	2750	1600	941	85	85	12.5	60	15
SDB 250 BC T2	415V, 3 $\emptyset$, 50Hz	0.75	400	2750	1600	941	85	85	..	60	15

*Tolerance $\pm 5\%$ on Specified values

Dimensional Drawing

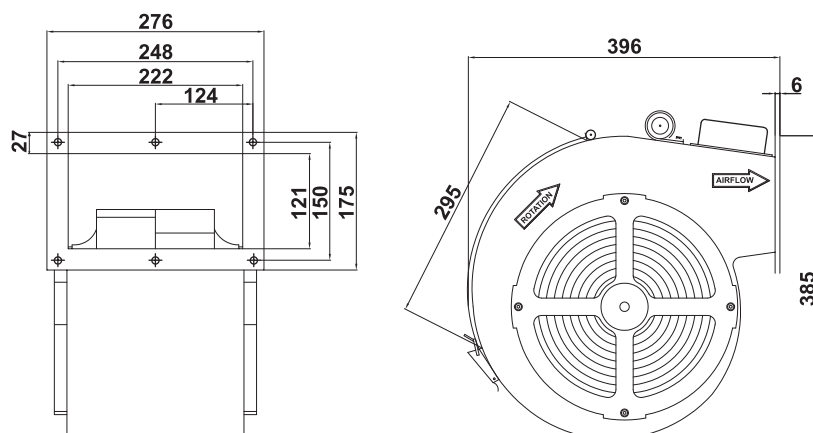

Performance Chart

