

HEAVY DUTY CENTRIFUGAL BLOWER

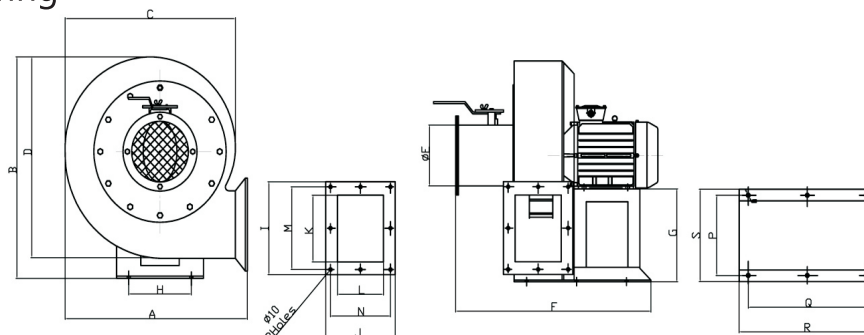


Technical Specification*

TYPE	I/P SUPPLY	AMPS (A)	WATTS (W)	RPM	AIR FLOW		STATIC.P (mm-wc)
					(CMH)	(CFM)	
IM 180 T2-0.25HP	415V, 3Ø, 50Hz	0.65	200	2850	600	353	55
IM 200 T4-0.5HP	415V, 3Ø, 50Hz	0.8	375	1400	350	205	30
IM 200 T2-0.5HP	415V, 3Ø, 50Hz	0.8	375	2800	750	441	75
IM 250 T4-1HP	415V, 3Ø, 50Hz	1.7	750	1400	1020	600	60
IM 250 T2-1HP	415V, 3Ø, 50Hz	1.7	750	2800	2300	1353	130
IM 300 T4-2HP	415V, 3Ø, 50Hz	3.2	1500	1400	1700	1000	55
IM 300 T2-2HP	415V, 3Ø, 50Hz	3.2	1500	2800	3300	1941	125
IM 350-3HP	415V, 3Ø, 50Hz	4.5	2250	2800	4000	2353	120

*Tolerance ±5% on Specified values

Dimensional Drawing



Dimensional Details

TYPE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
IM 200 0.5HP	410	495	375	385	80	430	250	190	200	155	135	90	172	125	190	225	285	210
IM 250 -1HP	425	490	380	425	165	620	210	220	242	242	170	170	212	212	230	320	400	262
IM 300 -2HP	590	700	545	600	200	615	345	210	280	220	208	146	255	195	240	330	400	270
IM 350 - 3HP	600	750	580	665	212	615	380	210	289	215	210	145	245	180	240	320	405	275









HEAVY DUTY CENTRIFUGAL BLOWER

**CUSTOM MADE CENTRIFUGAL BLOWERS**

- Motor HP Range (0.25HP to 12.5HP and above on special requirement)
- Static Pressure Range (20mm-wc to 300mm-wc)
- Air Volume Output (100 CMH to 20000 CMH)
- Specific Application Blowers
- Coupled Shaft Motor Blowers (For High Temperature Application upto 350°C)
- Belt Driven Motor Blowers (For High Temperature Application)
- Inlet, Outlet, Airflow, Static Pressure Parameters according to requirement
- Flame Proof Motor Blowers for special requirement

FORM OF BLOWERS

Dimensional Drawing VIEW FROM DRIVE END(Motor Side)

FORM A1FORM A2FORM A3FORM A4FORM C1FORM C2FORM C3FORM C4