



INDUCTION MOTORS



IM 390

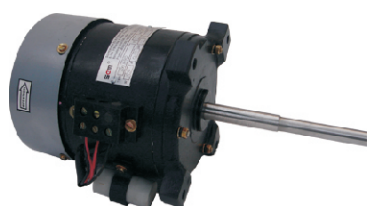

IM 400



IM 23




IR 25/35

Technical Specification*


TYPE	I/P SUPPLY	AMPS (A)max	FULL LOAD WATTS (W)	RPM	CAP. μ f	ADMISSIBLE AMBIENT TEMP	WEIGHT Kg
IM 390 S4	230V, 1 ϕ , 50Hz	0.5	150	1400	4	60	6
IM 390 T4	415V, 3 ϕ , 50Hz	0.4	150	1400	..	60	6
IM 400 S4	230V, 1 ϕ , 50Hz	0.65	165	1450	3.15	60	6.5
IM 23 S4	230V, 1 ϕ , 50Hz	3.0	950	1450	12.5	60	8.5
IM 23 S2	230V, 1 ϕ , 50Hz	7.0	1500	2900	25	60	8.2
IR 25 SS	230V, 1 ϕ , 50Hz	0.45	90	2600	2	60	2.2
IR 35 SS	230V, 1 ϕ , 50Hz	0.60	120	2800	4	60	3.2

*Tolerance $\pm 5\%$ on Specified values


Product Drawing

1 OFF 4 HOLES $\phi 10$
ON PCD 156



IM 390

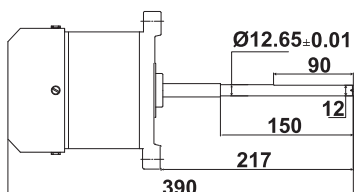

IR 25

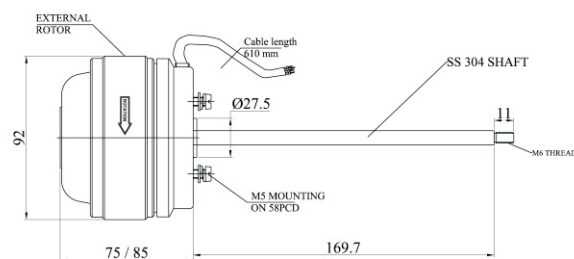

IM 400



SEB 23

