

INLINE DUCT FAN



Technical Specification*



TYPE	I/P SUPPLY	AMPS (A)	WATTS (W)	RPM	AIRFLOW		STATIC-PR (mm-wc)	dBA	CAP. μ f	ADMISSIBLE AMBIENT TEMP	WEIGHT Kg
					(CMH)	(CFM)					
SID 100 S2	230V, 1 $\emptyset$, 50Hz	0.35	80	2600	300	176	30	52	2	60	3.5
SID 100 S4	230V, 1 $\emptyset$, 50Hz	0.3	70	1400	175	103	16	52	2	60	3.5
SID 150 S2	230V, 1 $\emptyset$, 50Hz	0.45	120	2600	650	382	38	54	2.5	60	4.5
SID 150 T2	415V, 3 $\emptyset$, 50Hz	0.17	85	2600	650	382	38	56	..	60	4.5
SID 200 S2	230V, 1 $\emptyset$, 50Hz	0.6	150	2600	1100	647	50	60	4	60	6
SID 200 T2	415V, 3 $\emptyset$, 50Hz	0.3	150	2500	1120	659	50	60	..	60	6
SID 250 S2	230V, 1 $\emptyset$, 50Hz	0.65	160	2650	1600	941	55	63	5	60	6
SID 250 T2	415V, 3 $\emptyset$, 50Hz	0.30	155	2500	1500	882	52	62	..	60	6.2

*Tolerance $\pm 5\%$ on Specified values

Dimensional Details

TYPE	A	B	C	D
SID 100 S2/S4	97	320	30	240
SID 150 S2/T2	147	360	30	250
SID 200 S2/T2	197	404	35	250
SID 250 S2	247	404	35	260

Dimensional Drawing

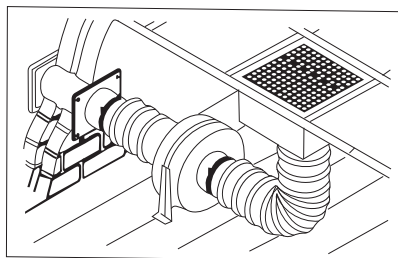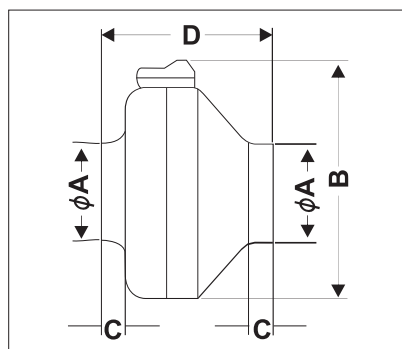

Performance Chart

