

SINGLE INLET BACKWARD CURVED IMPELLER SERIES



8EC



2C 8EC



2C 8EC



1C 8EC



23 BC


Technical Specification*

TYPE	I/P SUPPLY	AMPS (A)	WATTS (W)	RPM	AIRFLOW		STATIC-PR (mm-wc)	dBA	CAP. μ f	ADMISSIBLE AMBIENT TEMP	WEIGHT Kg
					(CMH)	(CFM)					
8 EC 1BTP	230V, 1 $\emptyset$, 50Hz	0.6	110	2700	880	518	42	65	3.15	60	2.5
8 EC 3BTP	415V, 3 $\emptyset$, 50Hz	0.2	100	2700	880	518	42	65	..	60	2.5
1C-8 EC 1BTP	230V, 1 $\emptyset$, 50Hz	0.6	110	2700	880	518	42	66	3.15	60	6
1C-8 EC 3BTP	415V, 3 $\emptyset$, 50Hz	0.2	100	2700	880	518	42	66	..	60	6
2C-8EC 1BTP	230V, 1 $\emptyset$, 50Hz	1.2	240	2700	1760	1035	42	80	3.15	60	9.1
2C-8 EC 3BTP	415V, 3 $\emptyset$, 50Hz	0.4	180	2700	1760	1035	42	80	..	60	9.1
23BC 1BT	230V, 1 $\emptyset$, 50Hz	0.53	130	2650	1200	706	55	70	4	60	7.0
23BC 3BT	415V, 3 $\emptyset$, 50Hz	0.25	140	2650	1200	706	55	70	..	60	7.0
25BC 1BT	230V, 1 $\emptyset$, 50Hz	0.60	140	2450	1230	724	55	74	4	60	7.5
25BC 3BT	415V, 3 $\emptyset$, 50Hz	0.30	150	2450	1230	724	55	74	..	60	7.5


*Tolerance $\pm 5\%$ on Specified values

Dimensional Drawing

8EC

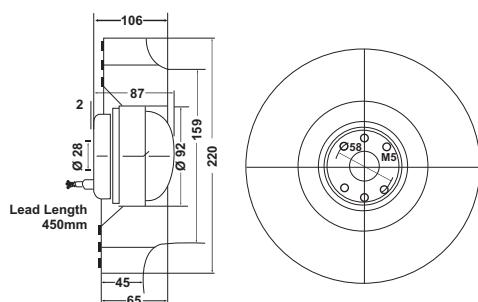

23BC

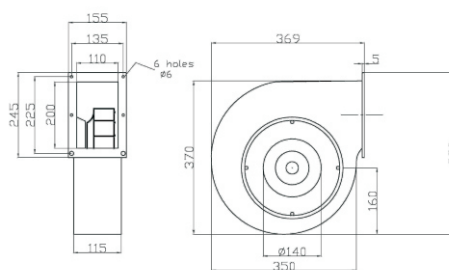

Performance Chart

