


SINGLE INLET FORWARD CURVED IMP. WITH EXTERNAL MOTOR



Dimensional Drawing

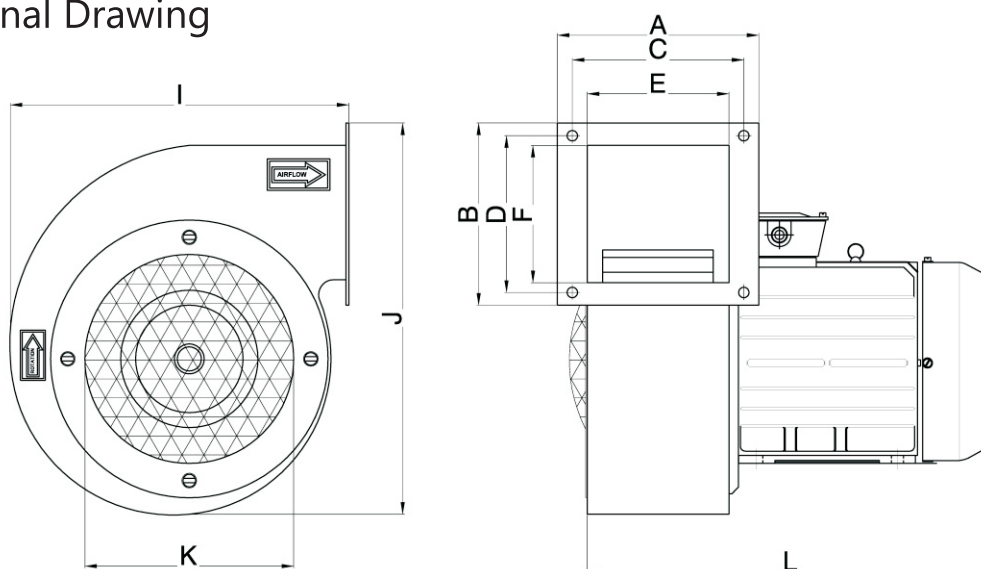

Dimensional Details

TYPE	A	B	C	D	E	F	I	J	K	L
130 IM 3BT	120	111	100	85	85	73	178	210	96	286
150 IM 3BT	109	140	90	120	70	90	225	275	140	275
160 IM 3BT	135	122	115	105	95	92	222	265	140	295
170 IM 3BT	125	140	110	120	86	110	261	290	145	292

Technical Specification*

TYPE	I/P SUPPLY	AMPS (A)	WATTS (W)	RPM	AIRFLOW (CMH)	STATIC-PR (mm-wc)	dBA	ADMISSIBLE AMBIENT TEMP	WEIGHT Kg
130 IM 3BT	415V, 3Ø, 50Hz	0.65	200	2880	420	68	80	80°	5.4
150 IM 3BT	415V, 3Ø, 50Hz	0.70	250	2880	500	40	72	80°	5.6
160 IM 3BT	415V, 3Ø, 50Hz	0.75	275	2800	650	55	74	80°	6.0
170 IM 3BT	415V, 3Ø, 50Hz	0.76	300	2800	800	58	76	80°	6.75

*Tolerance ±5% on Specified values