



TECHNICAL DATA – ENGLISH

## PANBETON® GIÓMETRY

DESIGN : ORA İTO

DIMENSIONS : 2600 x 900 X 19 mm | 102.36" x 35.43" x 0.75"

---

### CONCRETE LCDA

8 rue Copernic 49240 Avrillé - FRANCE

T. +33 (0) 2 41 33 99 10 F. +33 (0) 9 70 32 65 61

[CONTACT@CONCRETE-BETON.COM](mailto:CONTACT@CONCRETE-BETON.COM)


[WWW.CONCRETE-BETON.COM](http://WWW.CONCRETE-BETON.COM)

## PANBETON®


### ULTRA-LIGHTWEIGHT CONCRETE CLADDING

Panbeton® is a unique technology of ultra-lightweight concrete cladding. These slabs are quick and easy to install for wall and ceiling covering. It is the ideal covering to dress up a space with concrete.

- > A large lightweight and easy to cut slab.
- > Front made of genuine raw concrete
- > A simple attachment system
- > Quick installation with little handling
- > Endless customisation possibilities.

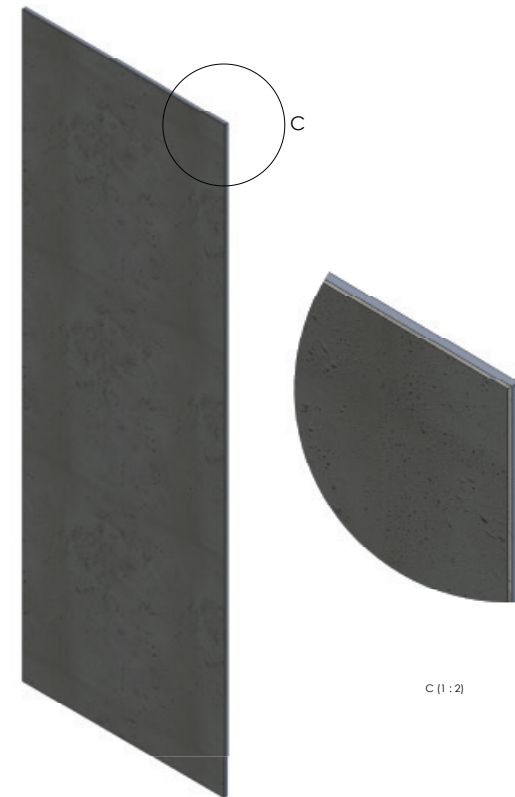


TECHNICAL SHEET (MM)

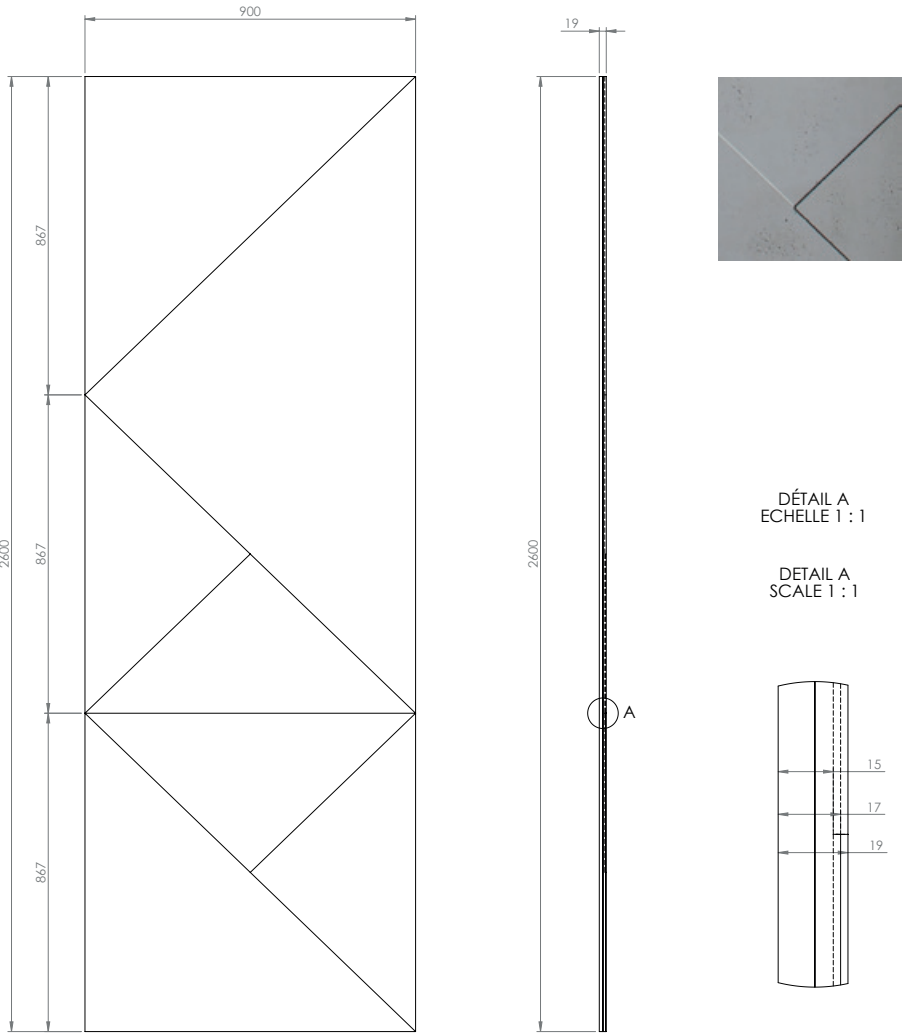

DÉTAIL A  
ECHELLE 1 : 1

DETAIL A  
SCALE 1 : 1




**INFORMATIONS TECHNIQUES :**  
Matière : Béton fibré ultra haute performance  
Poids : 35 Kg  
Tolérance générale +/- 3 mm

**TECHNICAL INFORMATIONS :**  
Material : Fiber High performance concrete  
Weight : 35 kg  
General tolerance : +/- 3 mm


CONCRETE LCDA			8 rue Copernic 49240 Avrillé www.concrete-beton.com	
Date	Nom	N°plan	Echelle :	Ep :
			Scale :	
			PANBETON ® GIÒMETRY ORA ITO	
Surface : m²			Bon pour accord :	
Units : mm			Agreement for production :	
Units : mm			FEUILLE 1 SUR 1	
Poids : Kg			SHEET 1 OF 1	
Weight : kg				

TECHNICAL SHEET (INCH)

EN

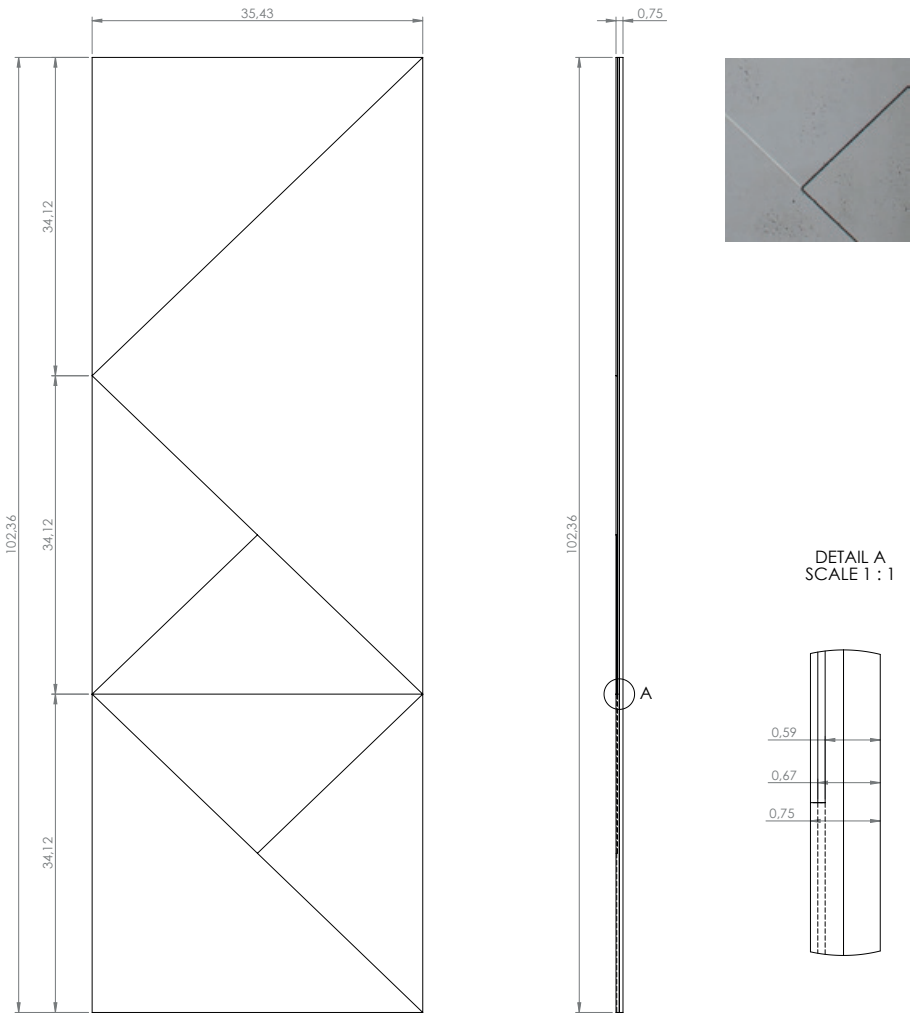

DETAIL A  
SCALE 1 : 1




**TECHNICAL INFORMATIONS :**  
Material : Fiber High performance concrete  
Weight : 77 LBS  
General tolerance : +/- 0.12 in

CONCRETE LCDA			8 rue Copernic 49240 Avrillé www.concrete-beton.com	
Date	Name	N°plan	Scale :	Ep :
			PANBETON ® GIÒMETRY ORA ITO	
Surface :			Agreement for production :	
Units : in				
Weight : LBS			SHEET 1 OF 1	

Ce dessin est la propriété de la société LCDA. Toute reproduction sans notre accord préalable est interdite.  
This drawing is the property of LCDA. Reproduction without our permission is prohibited.

TECHNICAL SHEET (MM)

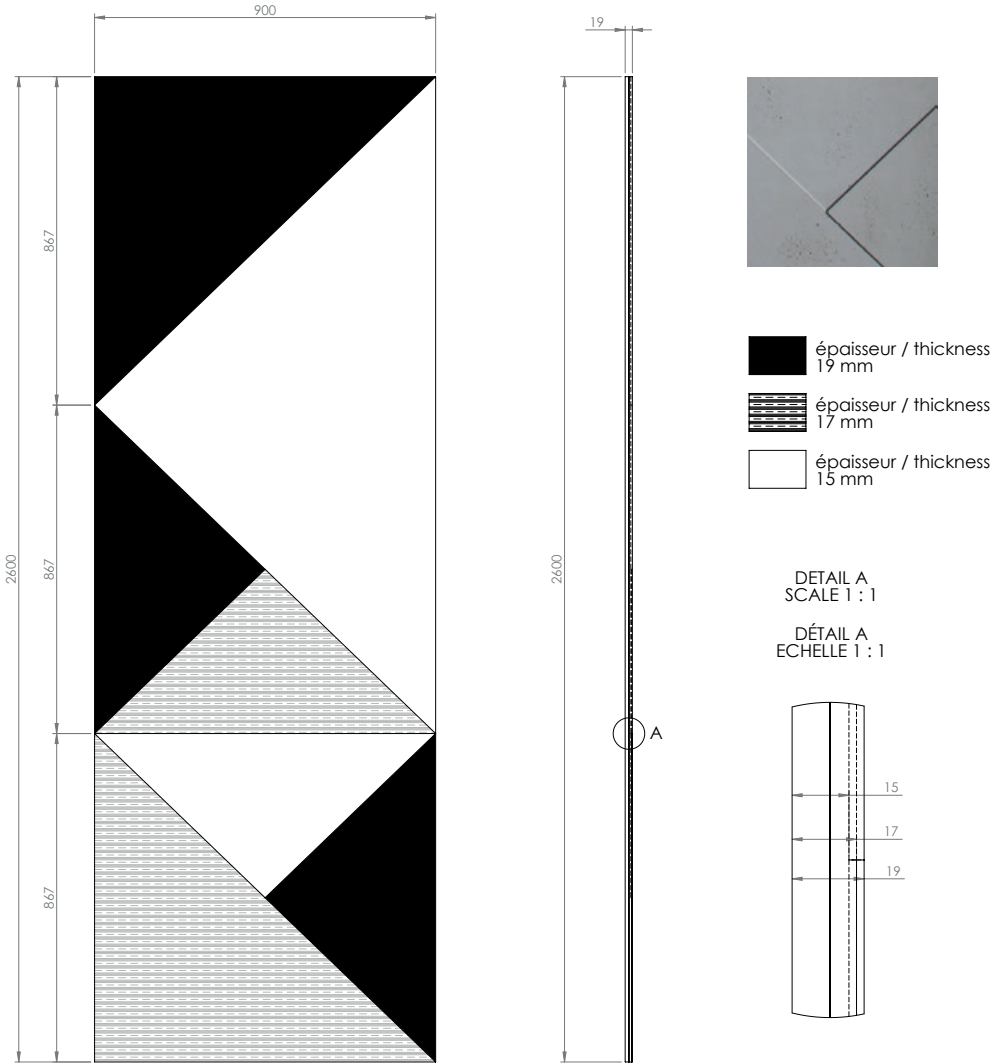

INFORMATIONS TECHNIQUES :

Matière : Béton fibré ultra haute performance  
Poids : 35 Kg  
Tolérance générale +/- 3 mm


TECHNICAL INFORMATIONS :

Material : Fiber High performance concrete  
Weight : 35 kg  
General tolerance : +/- 3 mm

<b>CONCRETE LCDA</b>			8 rue Copernic 49240 Avrillé www.concrete-beton.com	
Date	Nom Name	N°plan	Echelle : Scale :	Ep :
			PANBETON ® GIÒMETRY ORA ITO	
Surface : m²			Bon pour accord :	
Units : mm			Agreement for production :	
Units : mm			FEUILLE 1 SUR 1 SHEET 1 OF 1	
Folds : Kg				

TECHNICAL SHEET (INCH)

FR


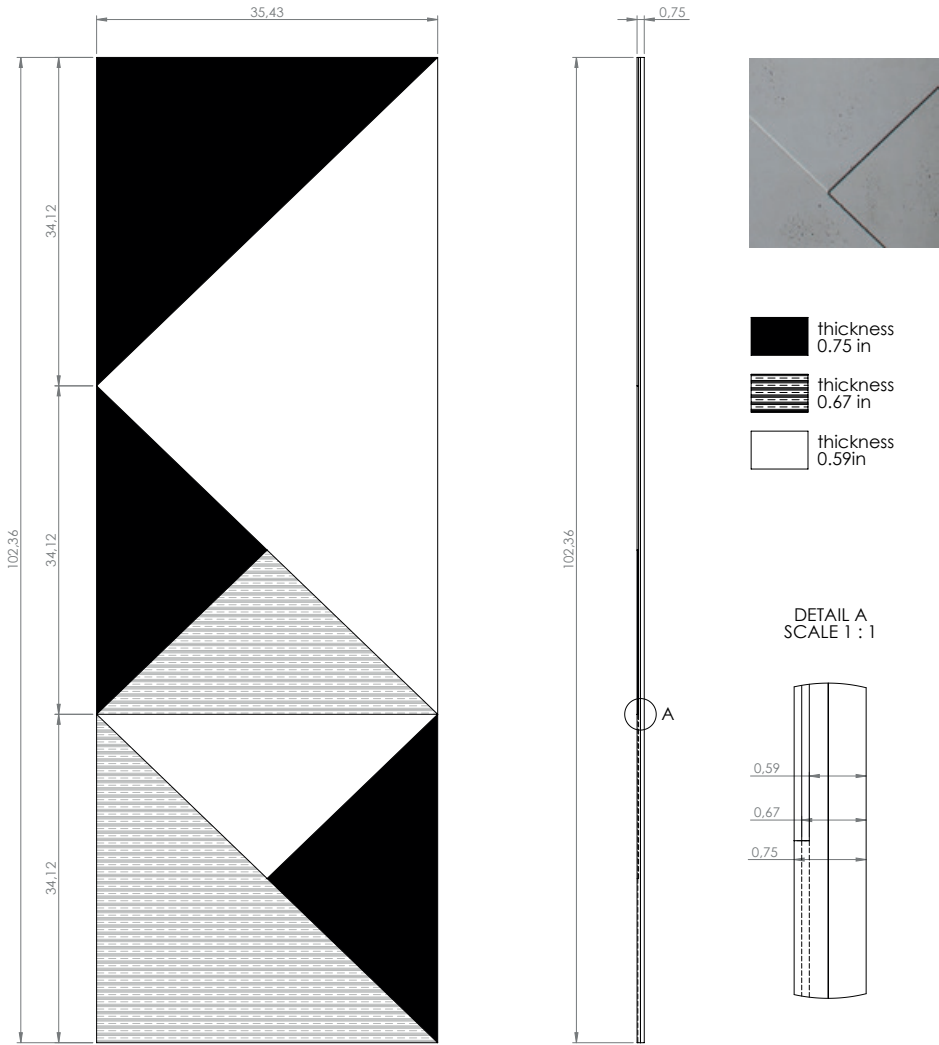













TECHNICAL INFORMATIONS :

Material : Fiber High performance concrete  
Weight : 77 LBS  
General tolerance : +/- 0.12 in

<b>CONCRETE LCDA</b>			8 rue Copernic 49240 Avrillé www.concrete-beton.com	
Date	Name	N°plan	Scale :	Ep :
			PANBETON ® GIÒMETRY ORA ITO	
Surface :			Agreement for production :	
Units : in			SHEET 1 OF 1	
Weight : LBS				

Ce dessin est la propriété de la société LCDA. Toute reproduction sans notre accord préalable est interdite.  
This drawing is the property of LCDA. Reproduction without our permission is prohibited.

	<b>DIMENSIONS</b>	2600 x 900 mm   102.36" x 35.43" (General tolerance +/- 3 mm   0.12")
	<b>ORTHOGONALITY</b>	+ /- 1.0 %
	<b>SURFACE AREA</b>	+ /- 1.0 %
	<b>THICKNESS</b>	19 mm   0.75"
	<b>WEIGHT</b>	35 Kg   77 lbs (+/- 20 %)
	<b>WEIGHT PER SQM</b>	12 to 18 kg/m²   25 lbs to 30 lbs /m²
	<b>COMPOSITION</b>	> Fibre-reinforced concrete > Construction panel
	<b>SEALER TREATMENT</b>	As an option (water-borne acrylic base)
	<b>MOUNTING &amp; BONDING</b>	Glue Hybrifix 550 DEN BRAVEN
	<b>SUBSTRATES</b>	Is glued to all substrates (plasterboard, bricks, breeze-blocks, etc.)
	<b>CUTTING</b>	Diamond blade (continuous-rim). outer corner possible, drilling with diamond-coated hole saw...

	<b>FIRE CLASSIFICATION</b>	> Euroclass B-s1, d0  > [OPTION] A2-s1d0 (with specific support : gypsum fiber board)  > ASTM E84 : Class A Smoke index : 0 Flame spread index : 0
	<b>HEAT RESISTANCE</b>	Up to 60°C   Up to 140 °F
	<b>THERMAL SHOCK</b>	Resistant
	<b>LIGHT RESISTANCE</b>	No impact
	<b>VOC CLASSIFICATION</b>	A+
	<b>ACOUSTIC</b>	Neutral
	<b>EXCLUDED</b>	Exterior, floor, shower stall. Not suitable for direct and continuous contact with water.

USE THIS ENTIRE DESCRIPTION TO SPECIFY OUR PRODUCTS.

COMPANY NAME		Concrete LCDA
TECHNICAL DATA	MORTAR	<p>Fibre-Reinforced shrinkage-compensating repair mortal.</p> <p>Non-shrinking mortal composed of sand, special cement, fibres and admixtures.</p> <p><b>Compressive strength:</b> Class R2</p> <p><b>Chloride ion content:</b> ≤ 0.05%</p> <p><b>Bonding :</b> ≥ 0.8 MPa</p>
	REINFORCED FIBRE	High Zirconia 17%+ Alkali Resistant Glass Fibre.
	CONSTRUCTION PANEL	Rigid extruded polystyrene foam finished on both sides with a polymer-modified mortar facing, reinforced with a glassfibre mesh fabric.

COMPOSITION

Slice view



9 MM | 0.35"

10 MM | 0.39"

FIBRE-  
REINFORCED  
CONCRETE

CONSTRUCTION  
PANEL





# FINISHES



Light Pitted




Medium Pitted




Heavy Pitted


# COLORS




200 - Natural Grey




217 - Slate Grey



216 - Anthracite Grey



209 - Black




402 - White



404 - Stone



205 - Brown



269 - Luzerne




473 - Ouarzazate


## 1 - BOARD TO BOARD JOIN



Front view




Top view




Schema


## 2 - OUTER CORNER\*



Front view



Top view




Schema


## 3 - TOP CORNER IRON



Front view



Top view




Schema


## 4 - IRON CORNER\*



Front view



Top view



Schema

\*45 degree cuts can be made at the Concrete LCDA factory (as an option).





# INSTALLATION TOOLS



PROTECTIVE GLOVES




SAFETY HEADPHONES




PROTECTIVE GLASSES



DUST MASK



HAND BRUSH

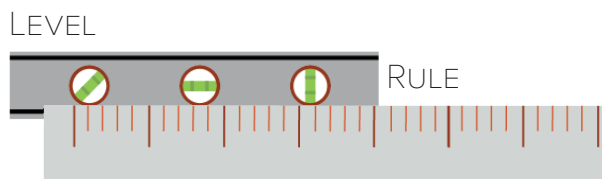


LEVEL

RULE




MALLET

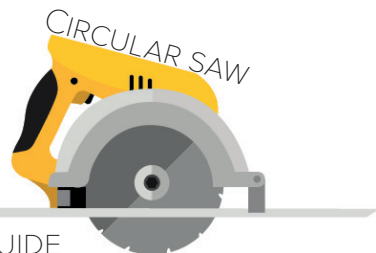

CIRCULAR SAW

& GUIDE RAIL



DIAMANT BLADE\*

REDUCER RING\*



\*Available in the cut kit  
(as an option)



GLUE GUN



GLUE HYBRIFIX  
550 DEN BRAVEN  
SEALANTS  
(recommended)

# INSTALLATION STEPS


FR

1



CLEAN THE AREA  
BEFORE THE INSTALLATION

2

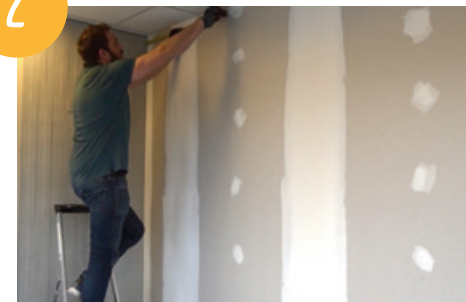

TAKE WALL MEASUREMENTS  
BEFORE CUTTING THE PANEL

3




COPY YOUR MEASUREMENTS  
ON THE PANEL

4




CUTTING WITH THE USE  
OF A GUIDE RAIL

5

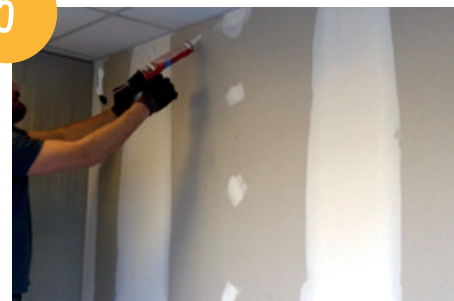

APPLY GLUE ON THE WALL  
(OR ON THE BACK OF THE PANEL)

6

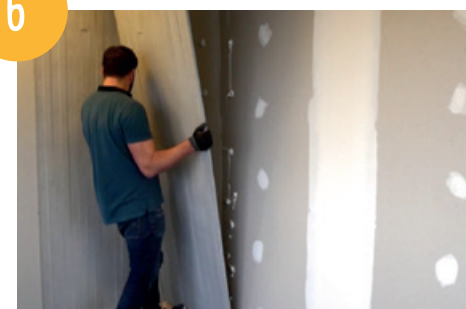

PLACE THE PANEL STARTING  
WITH THE BOTTOM

INSTALLATION VIDÉOS STEP BY STEP TO SEE

**ON OUR YOUTUBE CHANNEL @CONCRETE LCDa**



> [PANBETON®](#)

> [SLIMBETON®](#)


# INSTALLATION CONFIGURATIONS

FR


When installing the panels, you have the option of alternating the direction of the panels at your convenience to ensure the best visual effect




Configuration 1

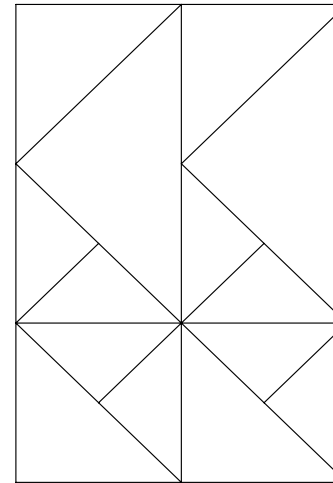


Configuration 2

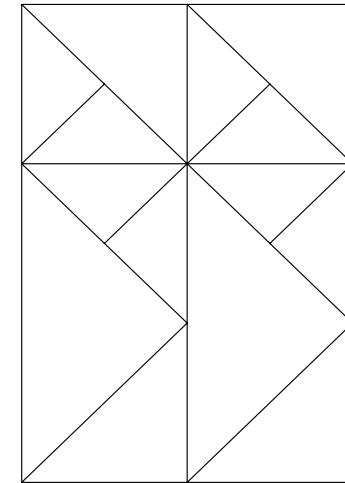

Configuration 3

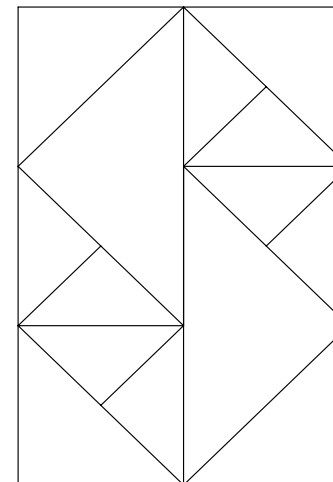

Configuration 4

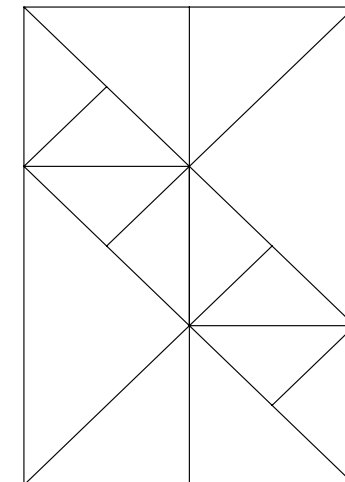

Ce dessin est la propriété de la société LCDA. Toute reproduction sans notre accord préalable est interdite.  
This drawing is the property of LCDA. Reproduction without our permission is prohibited.