



## TECHNICAL DATA – ENGLISH

# PANBETON® VERTICAL PLANKS

DESIGN : STUDIO LCDA

DIMENSIONS : 2600 x 900 X 15 mm | 102.36" x 35.43" x 0.59"

---

### CONCRETE LCDA

8 rue Copernic 49240 Avrillé - FRANCE

T. +33 (0) 2 41 33 99 10 F. +33 (0) 9 70 32 65 61

[CONTACT@CONCRETE-BETON.COM](mailto:CONTACT@CONCRETE-BETON.COM)


[WWW.CONCRETE-BETON.COM](http://WWW.CONCRETE-BETON.COM)

## PANBETON®


### ULTRA-LIGHTWEIGHT CONCRETE CLADDING

Panbeton® is a unique technology of ultra-lightweight concrete cladding. These slabs are quick and easy to install for wall and ceiling covering. It is the ideal covering to dress up a space with concrete.

- > A large lightweight and easy to cut slab.
- > Front made of genuine raw concrete
- > A simple attachment system
- > Quick installation with little handling
- > Endless customisation possibilities.

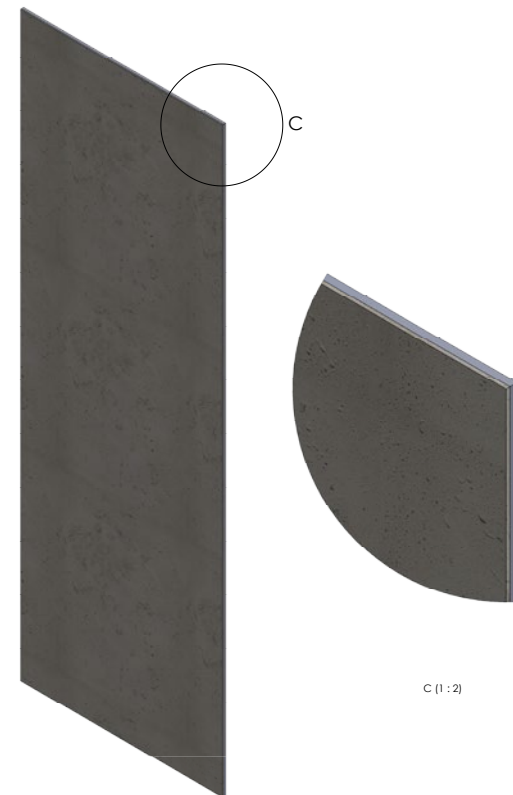


TECHNICAL SHEET (MM)

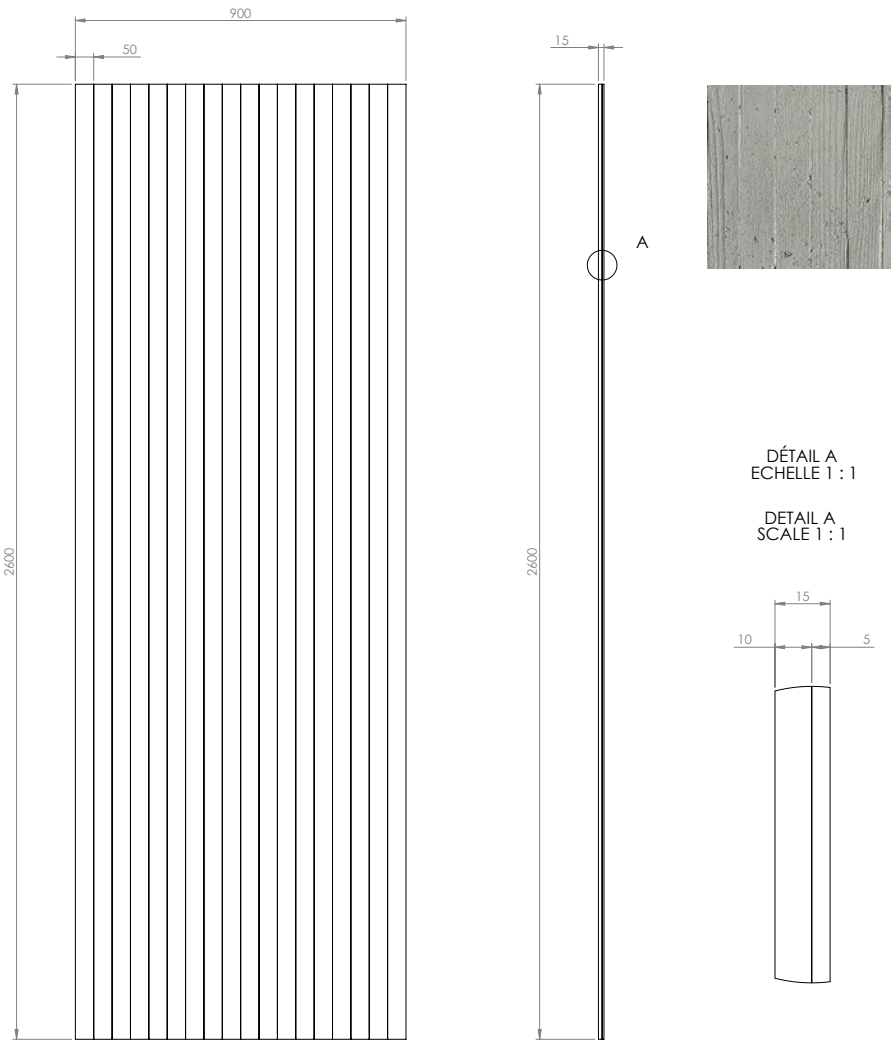

DÉTAIL A  
ECHELLE 1 : 1

DETAIL A  
SCALE 1 : 1



INFORMATIONS TECHNIQUES :

Matière : Béton fibré ultra haute performance

Poids : 30 Kg

Tolérance générale +/- 3 mm

TECHNICAL INFORMATIONS :

Material : Fiber High performance concrete


Weight : 30 kg

General tolerance : +/- 3 mm


CONCRETE LCDA			8 rue Copernic 49240 Avrillé www.concrete-beton.com	
			Echelle :	Ep :
			Scale :	
			PANBETON® LAMES BOIS VERTICALES PANBETON® VERTICAL PLANKS STUDIO LCDA	
			Bon pour accord : Agreement for production :	
			FEUILLE 1 SUR 1 SHEET 1 OF 1	
Date	Nom	N°plan		
Surface : m²				
Units : mm				
Units : mm				
Poids : Kg				
Weight : kg				

TECHNICAL SHEET (INCH)

EN

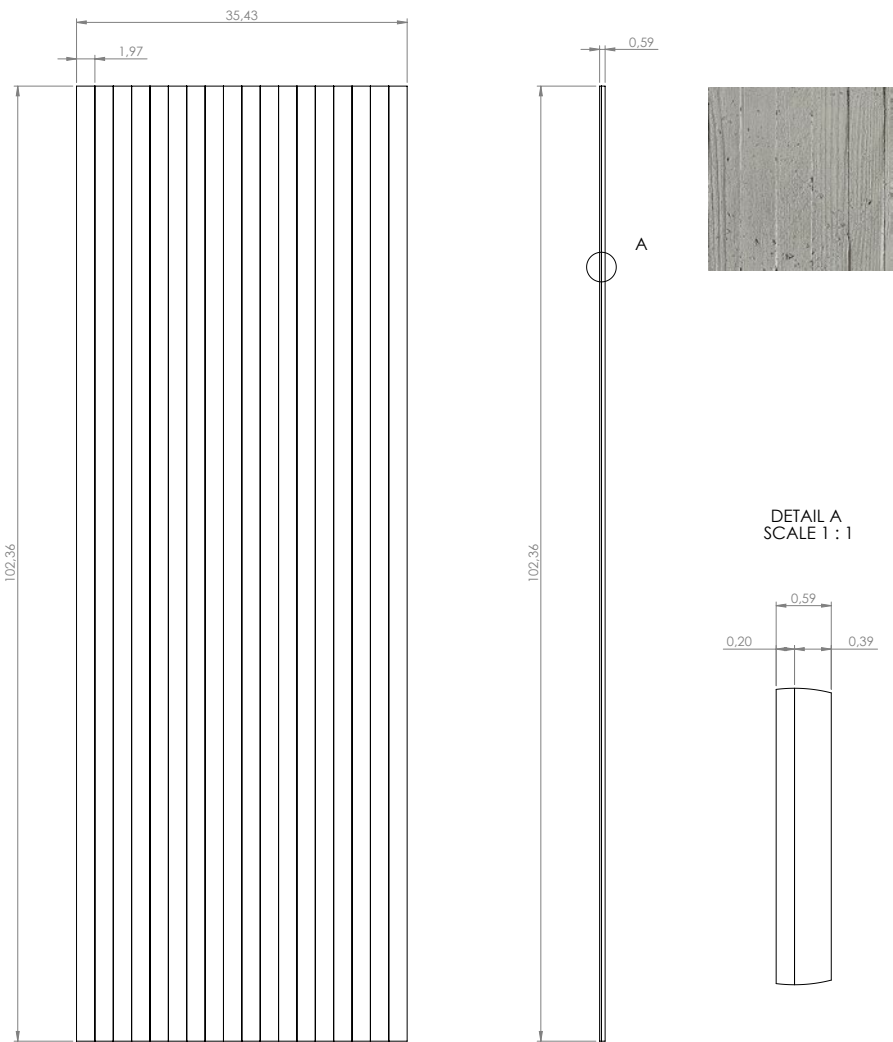

DETAIL A  
SCALE 1 : 1

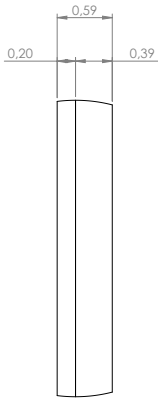

TECHNICAL INFORMATIONS :

Material : Fiber High performance concrete








Weight : 66 LBS

General tolerance : +/- 0.12 in

CONCRETE LCDA			8 rue Copernic 49240 Avrillé www.concrete-beton.com	
			Scale :	Ep :
			PANBETON® VERTICAL PLANKS STUDIO LCDA	
			Agreement for production :	
			SHEET 1 OF 1	
Date	Name	N°plan		
Surface :				
Units : in				
Weight : LBS				

Ce dessin est la propriété de la société LCDA. Toute reproduction sans notre accord préalable est interdite.  
This drawing is the property of LCDA. Reproduction without our permission is prohibited.

	<b>DIMENSIONS</b>	2600 x 900 mm   102.36" x 35.43" (General tolerance +/- 3 mm   0.12")
	<b>ORTHOGONALITY</b>	+ /- 1.0 %
	<b>SURFACE AREA</b>	+ /- 1.0 %
	<b>THICKNESS</b>	15 mm   0.59"
	<b>WEIGHT</b>	30 Kg   66 lbs (+/- 20 %)
	<b>WEIGHT PER SQM</b>	12 to 18 kg/m²   25 lbs to 30 lbs /m²
	<b>COMPOSITION</b>	> Fibre-reinforced concrete > Construction panel
	<b>SEALER TREATMENT</b>	As an option (water-borne acrylic base)
	<b>MOUNTING &amp; BONDING</b>	Glue Hybrifix 550 DEN BRAVEN
	<b>SUBSTRATES</b>	Is glued to all substrates (plasterboard, bricks, breeze-blocks, etc.)
	<b>CUTTING</b>	Diamond blade (continuous-rim). outer corner possible, drilling with diamond-coated hole saw...


	<b>FIRE CLASSIFICATION</b>	> Euroclass B-s1, d0  > [OPTION] A2-s1d0 (with specific support : gypsum fiber board)  > ASTM E84 : Class A Smoke index : 0 Flame spread index : 0
	<b>HEAT RESISTANCE</b>	Up to 60°C   Up to 140 °F
	<b>THERMAL SHOCK</b>	Resistant
	<b>LIGHT RESISTANCE</b>	No impact
	<b>VOC CLASSIFICATION</b>	A+
	<b>ACOUSTIC</b>	Neutral
	<b>EXCLUDED</b>	Exterior, floor, shower stall. Not suitable for direct and continuous contact with water.

USE THIS ENTIRE DESCRIPTION TO SPECIFY OUR PRODUCTS.

COMPANY NAME		Concrete LCDA
TECHNICAL DATA	MORTAR	<p>Fibre-Reinforced shrinkage-compensating repair mortal.</p> <p>Non-shrinking mortal composed of sand, special cement, fibres and admixtures.</p> <p><b>Compressive strength:</b> Class R2</p> <p><b>Chloride ion content:</b> ≤ 0.05%</p> <p><b>Bonding :</b> ≥ 0.8 MPa</p>
	REINFORCED FIBRE	High Zirconia 17%+ Alkali Resistant Glass Fibre.
	CONSTRUCTION PANEL	Rigid extruded polystyrene foam finished on both sides with a polymer-modified mortar facing, reinforced with a glassfibre mesh fabric.

COMPOSITION

Slice view



5 MM | 0.19"

FIBRE-  
REINFORCED  
CONCRETE

10 MM | 0.39"

CONSTRUCTION  
PANEL



# FINISHES



Light Pitted



Medium Pitted




Heavy Pitted


# COLORS




**200** - Natural Grey



**217** - Slate Grey



**216** - Anthracite Grey



**209** - Black



**402** - White



**404** - Stone



**205** - Brown



**269** - Luzerne




**473** - Ouarzazate




## 1 – BOARD TO BOARD JOIN



Front view




Top view




Schema


## 2 – OUTER CORNER\*



Front view




Top view




Schema


## 3 – TOP CORNER IRON



Front view




Top view



Schema


## 4 – IRON CORNER\*



Front view



Top view



Schema

\*45 degree cuts can be made at the Concrete LCDA factory (as an option).



# INSTALLATION TOOLS



PROTECTIVE GLOVES



SAFETY HEADPHONES




PROTECTIVE GLASSES



DUST MASK



HAND BRUSH

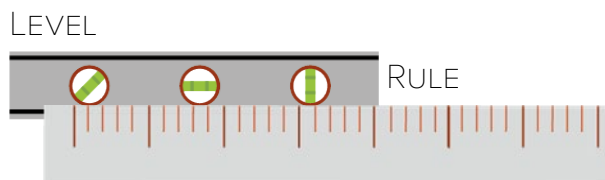


LEVEL


RULE



MALLET

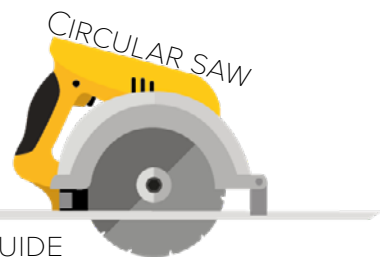

CIRCULAR SAW



DIAMANT BLADE\*

REDUCER RING\*



\*Available in the cut kit (as an option)



GLUE GUN



GLUE HYBRIFIX 550 DEN BRAVEN SEALANTS (recommended)

# INSTALLATION STEPS

FR

1



CLEAN THE AREA BEFORE THE INSTALLATION

2



TAKE WALL MEASUREMENTS BEFORE CUTTING THE PANEL

3



COPY YOUR MEASUREMENTS ON THE PANEL

4




CUTTING WITH THE USE OF A GUIDE RAIL

5



APPLY GLUE ON THE WALL (OR ON THE BACK OF THE PANEL)

6

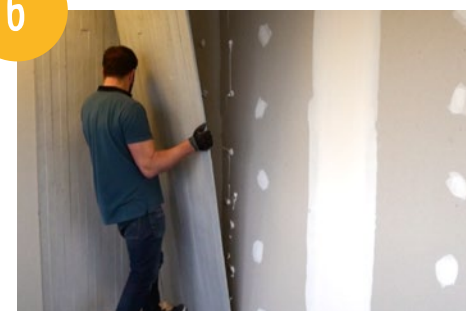

PLACE THE PANEL STARTING WITH THE BOTTOM

INSTALLATION VIDÉOS STEP BY STEP TO SEE

**ON OUR YOUTUBE CHANNEL @CONCRETE LCDA**



> [PANBETON®](#)

> [SLIMBETON®](#)