

Unique Features

TOUGH & DURABLE

Easi-Plank Hybrid flooring is a tough and durable choice for interior installations. Due to its unique stone polymer composite (SPC) construction and vinyl wear layer Easi-Plank is an excellent all-round option for everyday residential living. A great selection of colours in wide plank & herringbone parquetry.

TOPICAL WATER RESISTANT

Easi-Plank flooring provides good dimensional stability with a hard wearing surface to handle the bumps and grinds expected within the home environment. It's ideal for new installs or renovations including surfaces over existing ceramic tiles. The wide plank features a 0.5mm vinyl wear layer, our Herringbone Parquetry features a 0.7mm vinyl wear layer. Sub-floor prep and moisture barrier will be required. Check local building regulations for suitable areas of use within the home or apartment.














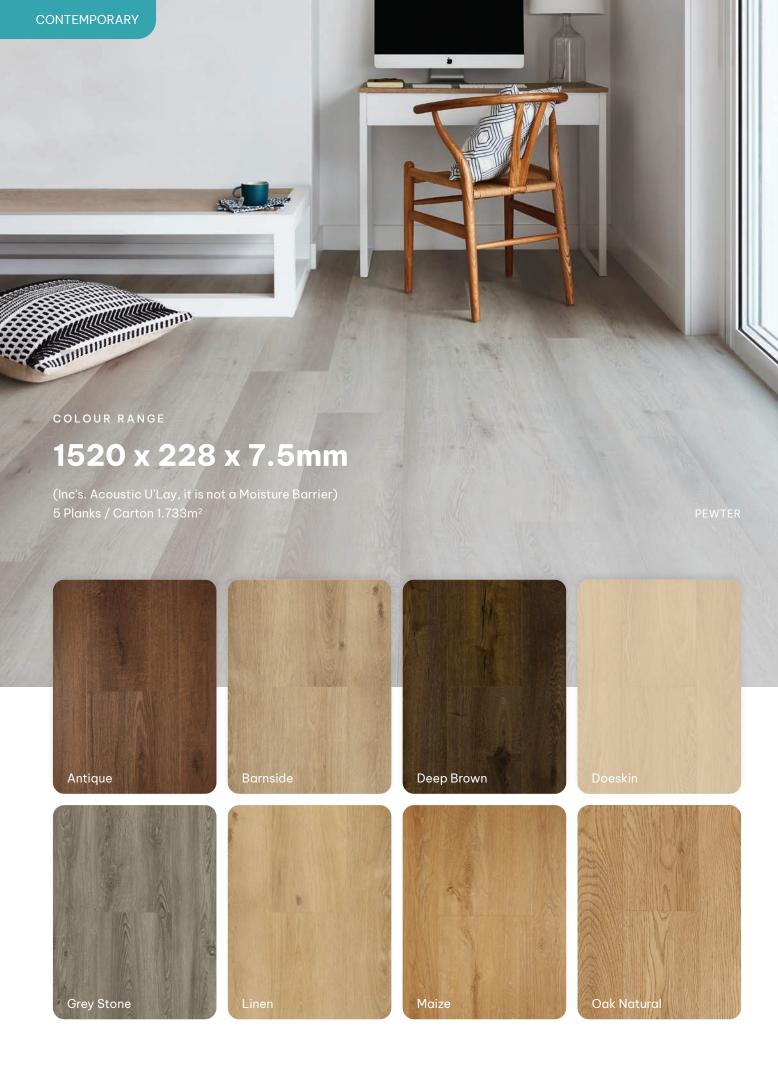



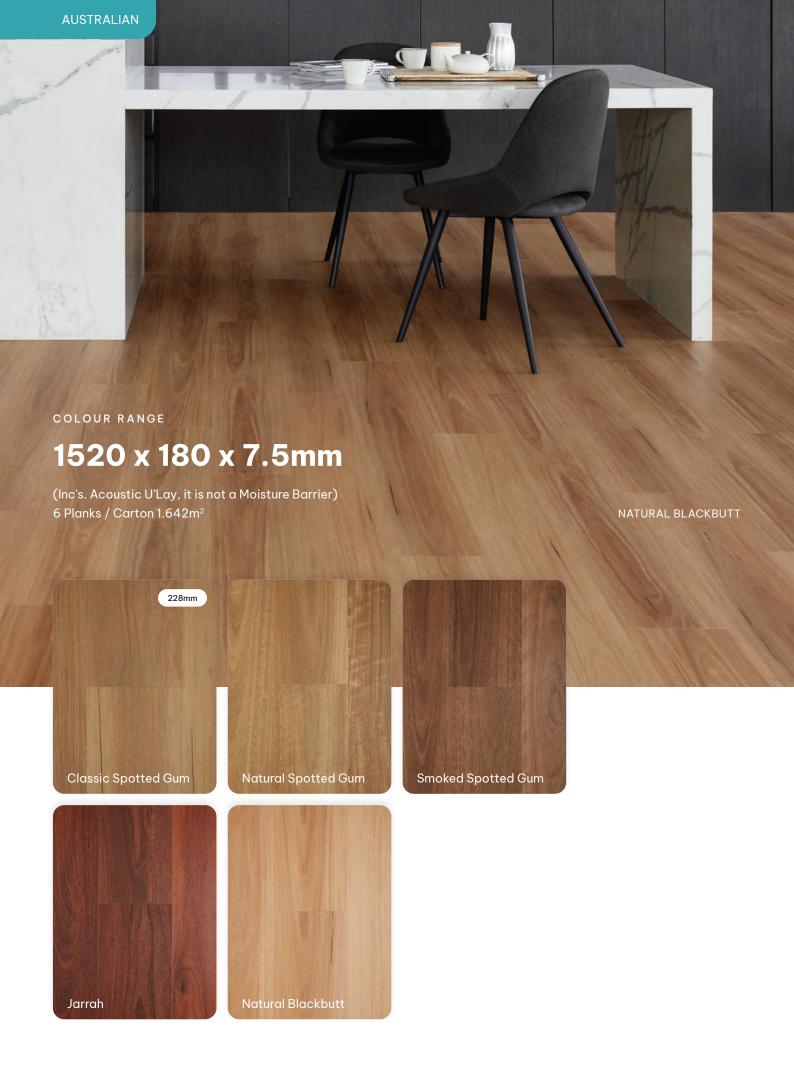

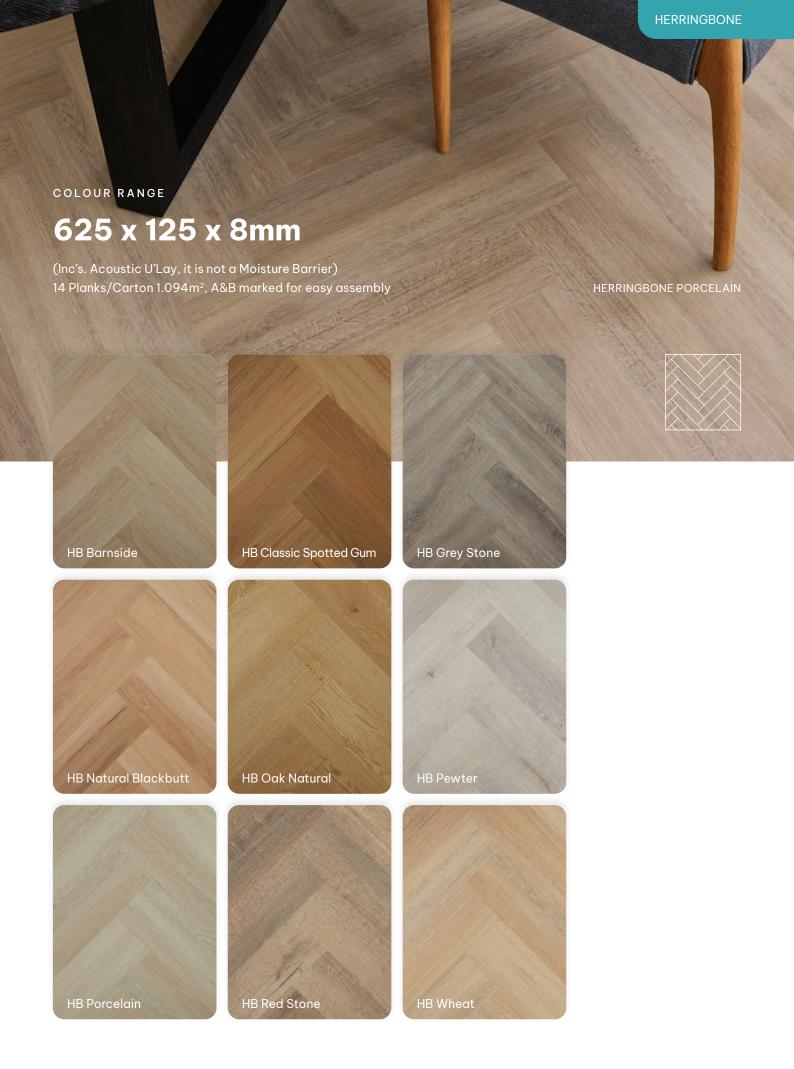

Technical Specifications

DESCRIPTION & PROFILE

Stone Polymer Composite (SPC) construction. Unilin click profile. Micro Bevel Edges, V4.

SURFACE FEATURES

Realistic timber visuals, on-trend colours and textures. Water based Matte coating.

SLIP & FIRE TEST

AS 4586:2013 Appendix A, slider 96 Wet Pendulum P4. CHF Value, 10.5 kWm². Smoke Value, 90% minutes.

VOC EMISSIONS

< E1, FloorScore Certifed SCS-EC10.3-2014 v4.0.

SIZES

Planks:

1520 x 228 x 7.5mm, 1.733m²/ Ctn, 5 planks – 0.5mm Wear Layer 1520 x 180 x 7.5mm, 1.642m²/ Ctn, 6 planks – 0.5mm Wear Layer

Herringbone:

625 x 125 x 8mm, A&B marked, 1.094m²/ Ctn, 14 pieces – 0.7mm Wear Layer

ACOUSTIC VALUE

L'nT,w 42 - AAAC⁵ star rating, 5 Star, Complies with NCC/BCA

WARRANTY

25 Year Limited Lifetime Structural Warranty20 Year Limited Lifetime Residential Wear Warranty5 Year Limited Lifetime Commercial Warranty

For warranty support our hybrid floors must be installed with 200 μ m builders' film on all subfloors to impede either moisture from below or concrete vapour ingress. Installation guidelines including perimeter & room to room expansion requirements must be followed for warranty compliance. The IXPE underlay is acoustic only, it is not a moisture barrier.







