

NUOERA
Mix Stone



Nuoera Crafted from Earth's Finest Elements

Inspired by nature's artistry, Nuoera combines the organic pores of travertine with the textured grains of sandstone to create a refined ambiance in any setting. This unique blend of lightness and solidity enhances both contemporary and classic interiors, adding elegance and depth to feature walls, flooring, and decorative accents. The result is a timeless appeal that enriches your space with a sophisticated touch.

Refined Elegance

Nuoera's Lappato finish strikes a perfect balance between shine and texture, offering a semi-polished surface that enhances both durability and aesthetic appeal, ideal for modern and traditional interiors.

Experience the Detail

With high P4 anti-slip technology, Nuoera combines safety and elegance, providing slip resistance while maintaining a smooth, luxurious finish.

Built for Durability

Nuoera's R11 anti-slip surface offers superior grip in wet conditions, ensuring safety and visual appeal for high-traffic areas in both residential and commercial spaces.

NUOERA

Nuoera merges the granular lines of sandstone with the organic patterns of travertine, creating surfaces rich in texture and depth. The interplay of sandstone's fine grains and travertine's flowing veins brings a natural elegance, warmth, and character to any space. This blend of textures makes Nuoera a versatile choice for both contemporary and classic interiors, adding subtle sophistication to walls, floors, and feature elements.

With three expertly crafted finishes, Nuoera balances aesthetics with functionality. The Lappato finish offers a semi-polished surface with refined sheen, ideal for spaces that call for elegance. The P4 anti-slip finish provides smooth, slip-resistant safety for areas where both style and practicality are key. For wet or high-traffic areas, the R11 anti-slip finish offers a stronger grip with a textured surface, ensuring optimal safety. Together, these finishes make Nuoera adaptable for diverse spaces, blending beauty, durability, and safety.



• •

3 FINISHES




Lappato

Refined sheen with smooth texture and durability.



Antislip (P4)

Smooth with reliable slip resistance and elegance.



Grip (R11)

Textured for superior grip and safety in wet areas.

3 SIZES

600x1200mm / 24"x48"

600x600mm / 24"x24"

300x600mm / 12"x24"

5 COLORS



Bianco

Cream

Dune

Grey

Tarmac



Bianco

Floor: YSR601251

Finishes: Antislip (P4)

Size: 600x600mm / 24"×24"






Cream

Floor: YSR601252

Finishes: Antislip (P4)

Size: 600x600mm / 24"×24"

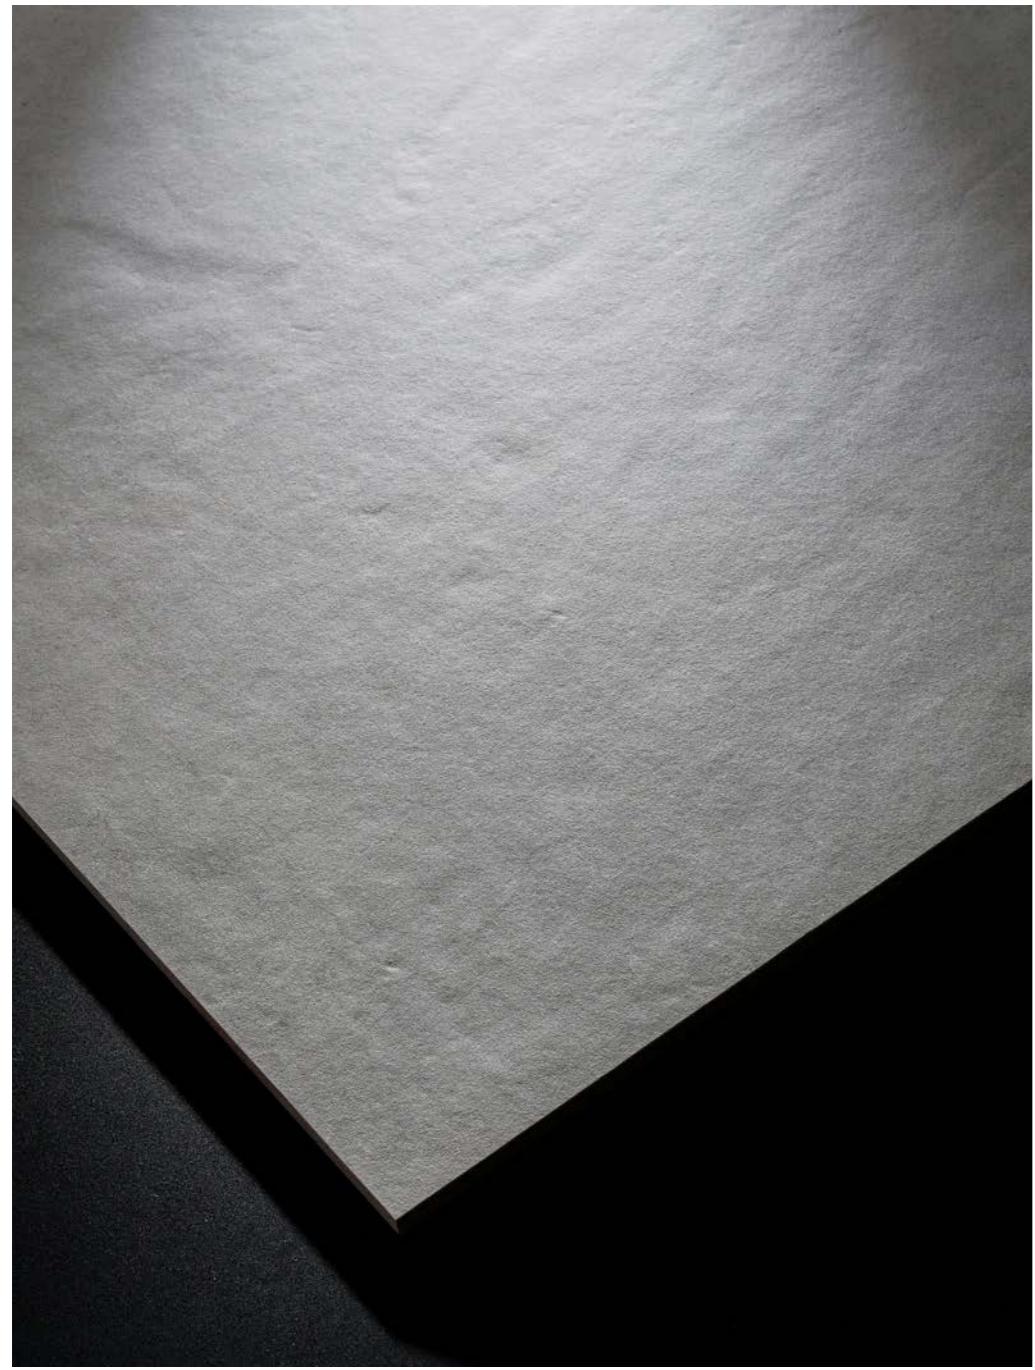

Dune

Floor: YSR631253

Finishes: Antislip (P4)

Size: 300x600mm / 12"x24"





Grey

Floor: YS271254

Finishes: Lappato

Size: 600x1200mm / 24"x48"



Grey

Floor: YSR271254

Finishes: Antislip (P4)

Size: 600x1200mm / 24"x48"



Grey

Floor: YSR601254

Finishes: Antislip (P4)

Size: 600x600mm / 24"x24"



Grey

Wall+Floor: YSR601254

Finishes: Antislip (P4)

Size: 600x600mm / 24"x24"



Grey

Floor: YFR601254

Finishes: Grip (R11)

Size: 600x600mm / 24"x24"



Tarmac

Floor: YSR601246

Finishes: Antislip (P4)

Size: 600x600mm / 24"x24"



Tarmac

Floor: YS601246

Finishes: Lappato

Size: 600x600mm / 24"x24"

NUOERA

Bianco

■ Lappato


YS271251	600x1200mm/24"x48"
YS601251	600x600mm/24"x24"
YS631251	300x600mm/12"x24"

■ Antislip (P4)

YSR271251	600x1200mm/24"x48"
YSR601251	600x600mm/24"x24"
YSR631251	300x600mm/12"x24"

■ Grip (R11)

YFR601251	600x600mm/24"x24"
YFR631251	300x600mm/12"x24"

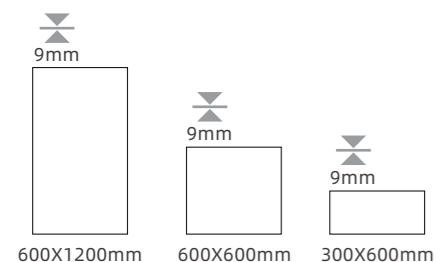

Multi-Texture Display



600X600mm | Recommended Application



Shade Variation



Slight Variation



NUOERA

Cream

■ Lappato


YS271252	600x1200mm/24"x48"
YS601252	600x600mm/24"x24"
YS631252	300x600mm/12"x24"

■ Antislip (P4)

YSR271252	600x1200mm/24"x48"
YSR601252	600x600mm/24"x24"
YSR631252	300x600mm/12"x24"

■ Grip (R11)

YFR601252	600x600mm/24"x24"
YFR631252	300x600mm/12"x24"

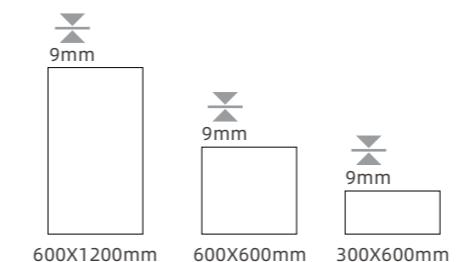

Multi-Texture Display



600X600mm | Recommended Application



Shade Variation



Slight Variation



NUOERA

Dune

■ Lappato


YS271253	600x1200mm/24"x48"
YS601253	600x600mm/24"x24"
YS631253	300x600mm/12"x24"

■ Antislip (P4)

YSR271253	600x1200mm/24"x48"
YSR601253	600x600mm/24"x24"
YSR631253	300x600mm/12"x24"

■ Grip (R11)

YFR601253	600x600mm/24"x24"
YFR631253	300x600mm/12"x24"

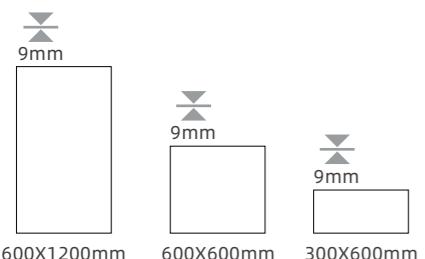

Multi-Texture Display



600X600mm

FACES 6

Technical Info

Recommended Application



Shade Variation



Slight Variation

NUOERA

Grey

■ Lappato


YS271254	600x1200mm/24"x48"
YS601254	600x600mm/24"x24"
YS631254	300x600mm/12"x24"

■ Antislip (P4)


YSR271254	600x1200mm/24"x48"
YSR601254	600x600mm/24"x24"
YSR631254	300x600mm/12"x24"

■ Grip (R11)

YFR601254	600x600mm/24"x24"
YFR631254	300x600mm/12"x24"

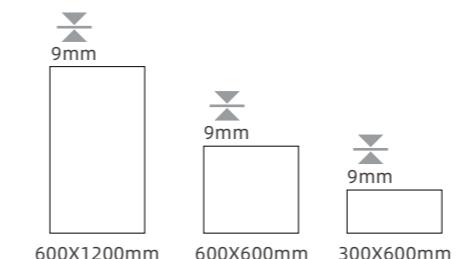

Multi-Texture Display

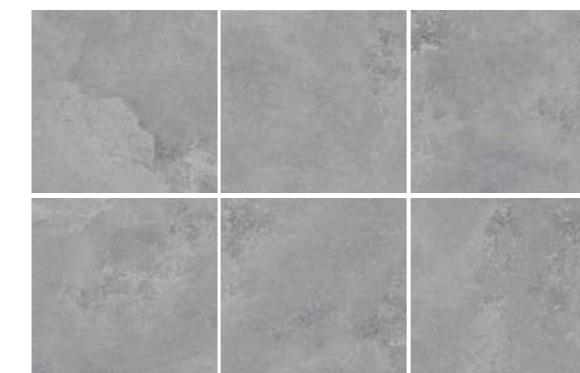

600X600mm

FACES 6

Technical Info

Recommended Application



Shade Variation



Slight Variation



NUOERA

Tarmac

Lappato


YS271246	600x1200mm/24"x48"
YS601246	600x600mm/24"x24"
YS631246	300x600mm/12"x24"

Antislip (P4)

YSR271246	600x1200mm/24"x48"
YSR601246	600x600mm/24"x24"
YSR631246	300x600mm/12"x24"

Grip (R11)

YFR601246	600x600mm/24"x24"
YFR631246	300x600mm/12"x24"

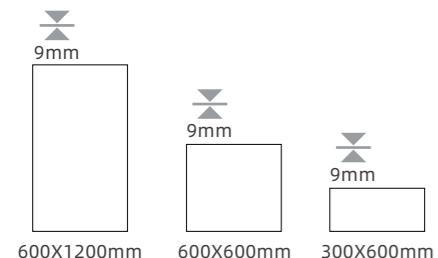

Multi-Texture Display



600X600mm

FACES 6

Technical Info

Recommended Application




Shade Variation



Slight Variation

The Range



600x1200mm 24"x48"	9mm	Lappato	YS271251	YS271252	YS271253	YS271254	YS271246
-----------------------	-----	---------	----------	----------	----------	----------	----------

600x600mm 24"x24"	9mm	Lappato	YS601251	YS601252	YS601253	YS601254	YS601246
----------------------	-----	---------	----------	----------	----------	----------	----------

300x600mm 12"x24"	9mm	Lappato	YS631251	YS631252	YS631253	YS631254	YS631246
----------------------	-----	---------	----------	----------	----------	----------	----------

600x1200mm 24"x48"	9mm	Antislip (P4)	YSR271251	YSR271252	YSR271253	YSR271254	YSR271246
-----------------------	-----	------------------	-----------	-----------	-----------	-----------	-----------

600x600mm 24"x24"	9mm	Antislip (P4)	YSR601251	YSR601252	YSR601253	YSR601254	YSR601246
----------------------	-----	------------------	-----------	-----------	-----------	-----------	-----------


300x600mm 12"x24"	9mm	Antislip (P4)	YSR631251	YSR631252	YSR631253	YSR631254	YSR631246
----------------------	-----	------------------	-----------	-----------	-----------	-----------	-----------

600x600mm 24"x24"	9mm	Grip (R11)	YFR601251	YFR601252	YFR601253	YFR601254	YFR601246
----------------------	-----	---------------	-----------	-----------	-----------	-----------	-----------

300x600mm 12"x24"	9mm	Grip (R11)	YFR631251	YFR631252	YFR631253	YFR631254	YFR631246
----------------------	-----	---------------	-----------	-----------	-----------	-----------	-----------

Technical Guide


Tiles can be cut following the pattern or against the pattern. Special cuts outside this list can be provided under request.



Checker board




Staggered brickwork




Herringbone




Hexagons



Checker board




Staggered brickwork




Herringbone




Hexagons



Checker board




Staggered brickwork




Herringbone




Hexagons



Checker board




Staggered brickwork




Herringbone




Hexagons



Checker board



Staggered brickwork



Herringbone




Hexagons

Special Pieces

SLOT




Longitudinal

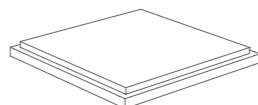


Square slot

SKIRTING




Bull-nose cut




Bevel cut


STEPS Anti-slip surface

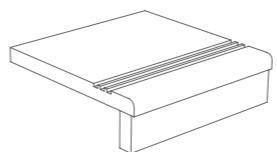


Bull-nose cut

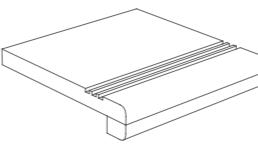

Bull-nose cut

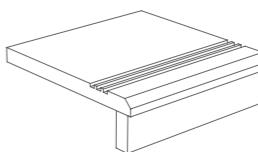


Bevel cut

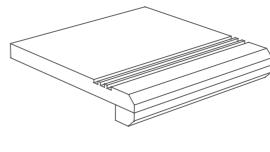


Bevel cut


STEPS

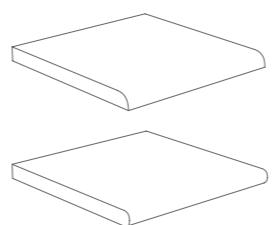


Bull-nose cut

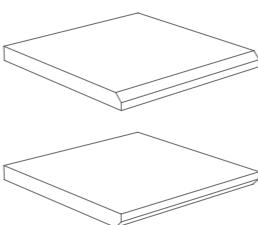

Bevel cut

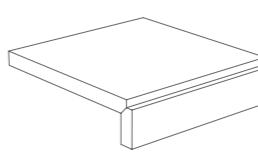

Bevel joint

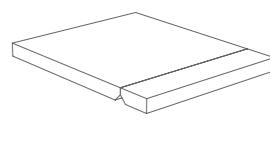


Bevel joint

Technical Standard

	PROPERTIES	UNIT	ISO STANDARD REQUIREMENT			RESULT
	Size & Deviation	%	SIDE	The deviation of the average size for each tile from the work size	±0.6	-0.02+0.03
				Thickness	±5	-0.1+1.0
	Water absorption	%	Average:E ≤ 0.5			0.3
			Individual maximum:E ≤ 0.6			0.3
	Breaking strength	N	When the thickness ≥ 7.5mm, the mean value shall not be less than 1300			2183
	Anti-slip	R	9			9
	Coefficient of linear thermal expansion		Test method available			6.5x10 ⁻⁶ C ⁻¹
	Resistance to thermal shock		Test method available			Guaranteed
	Frost Resistance		Required			Required
	Resistance to low concentration acid or alkali		Report the result after test			Class GA
	Stain resistance		No less than Class 3 after test			Class 5

Regular Packing Details

SIZE(mm)	PCS/CTN	M2/CTN	KGS/CTN	CTNS/PALLET (1100X1100mm)	M2/PALLET (1100X1100mm)	KGS/PALLET (1100X1100mm)
300x600	8	1.44	29	40	57.6	1160
600x600	4	1.44	29	40	57.6	1160
600x600	6	2.16	44	30	64.8	1320
800x800	3	1.92	43	35	67.2	1505
600x1200	2	1.44	36	60	86.4	2160
600x1200	3	2.16	45	52	112.32	2340
750x1500	2	2.25	46	46	103.5	2116

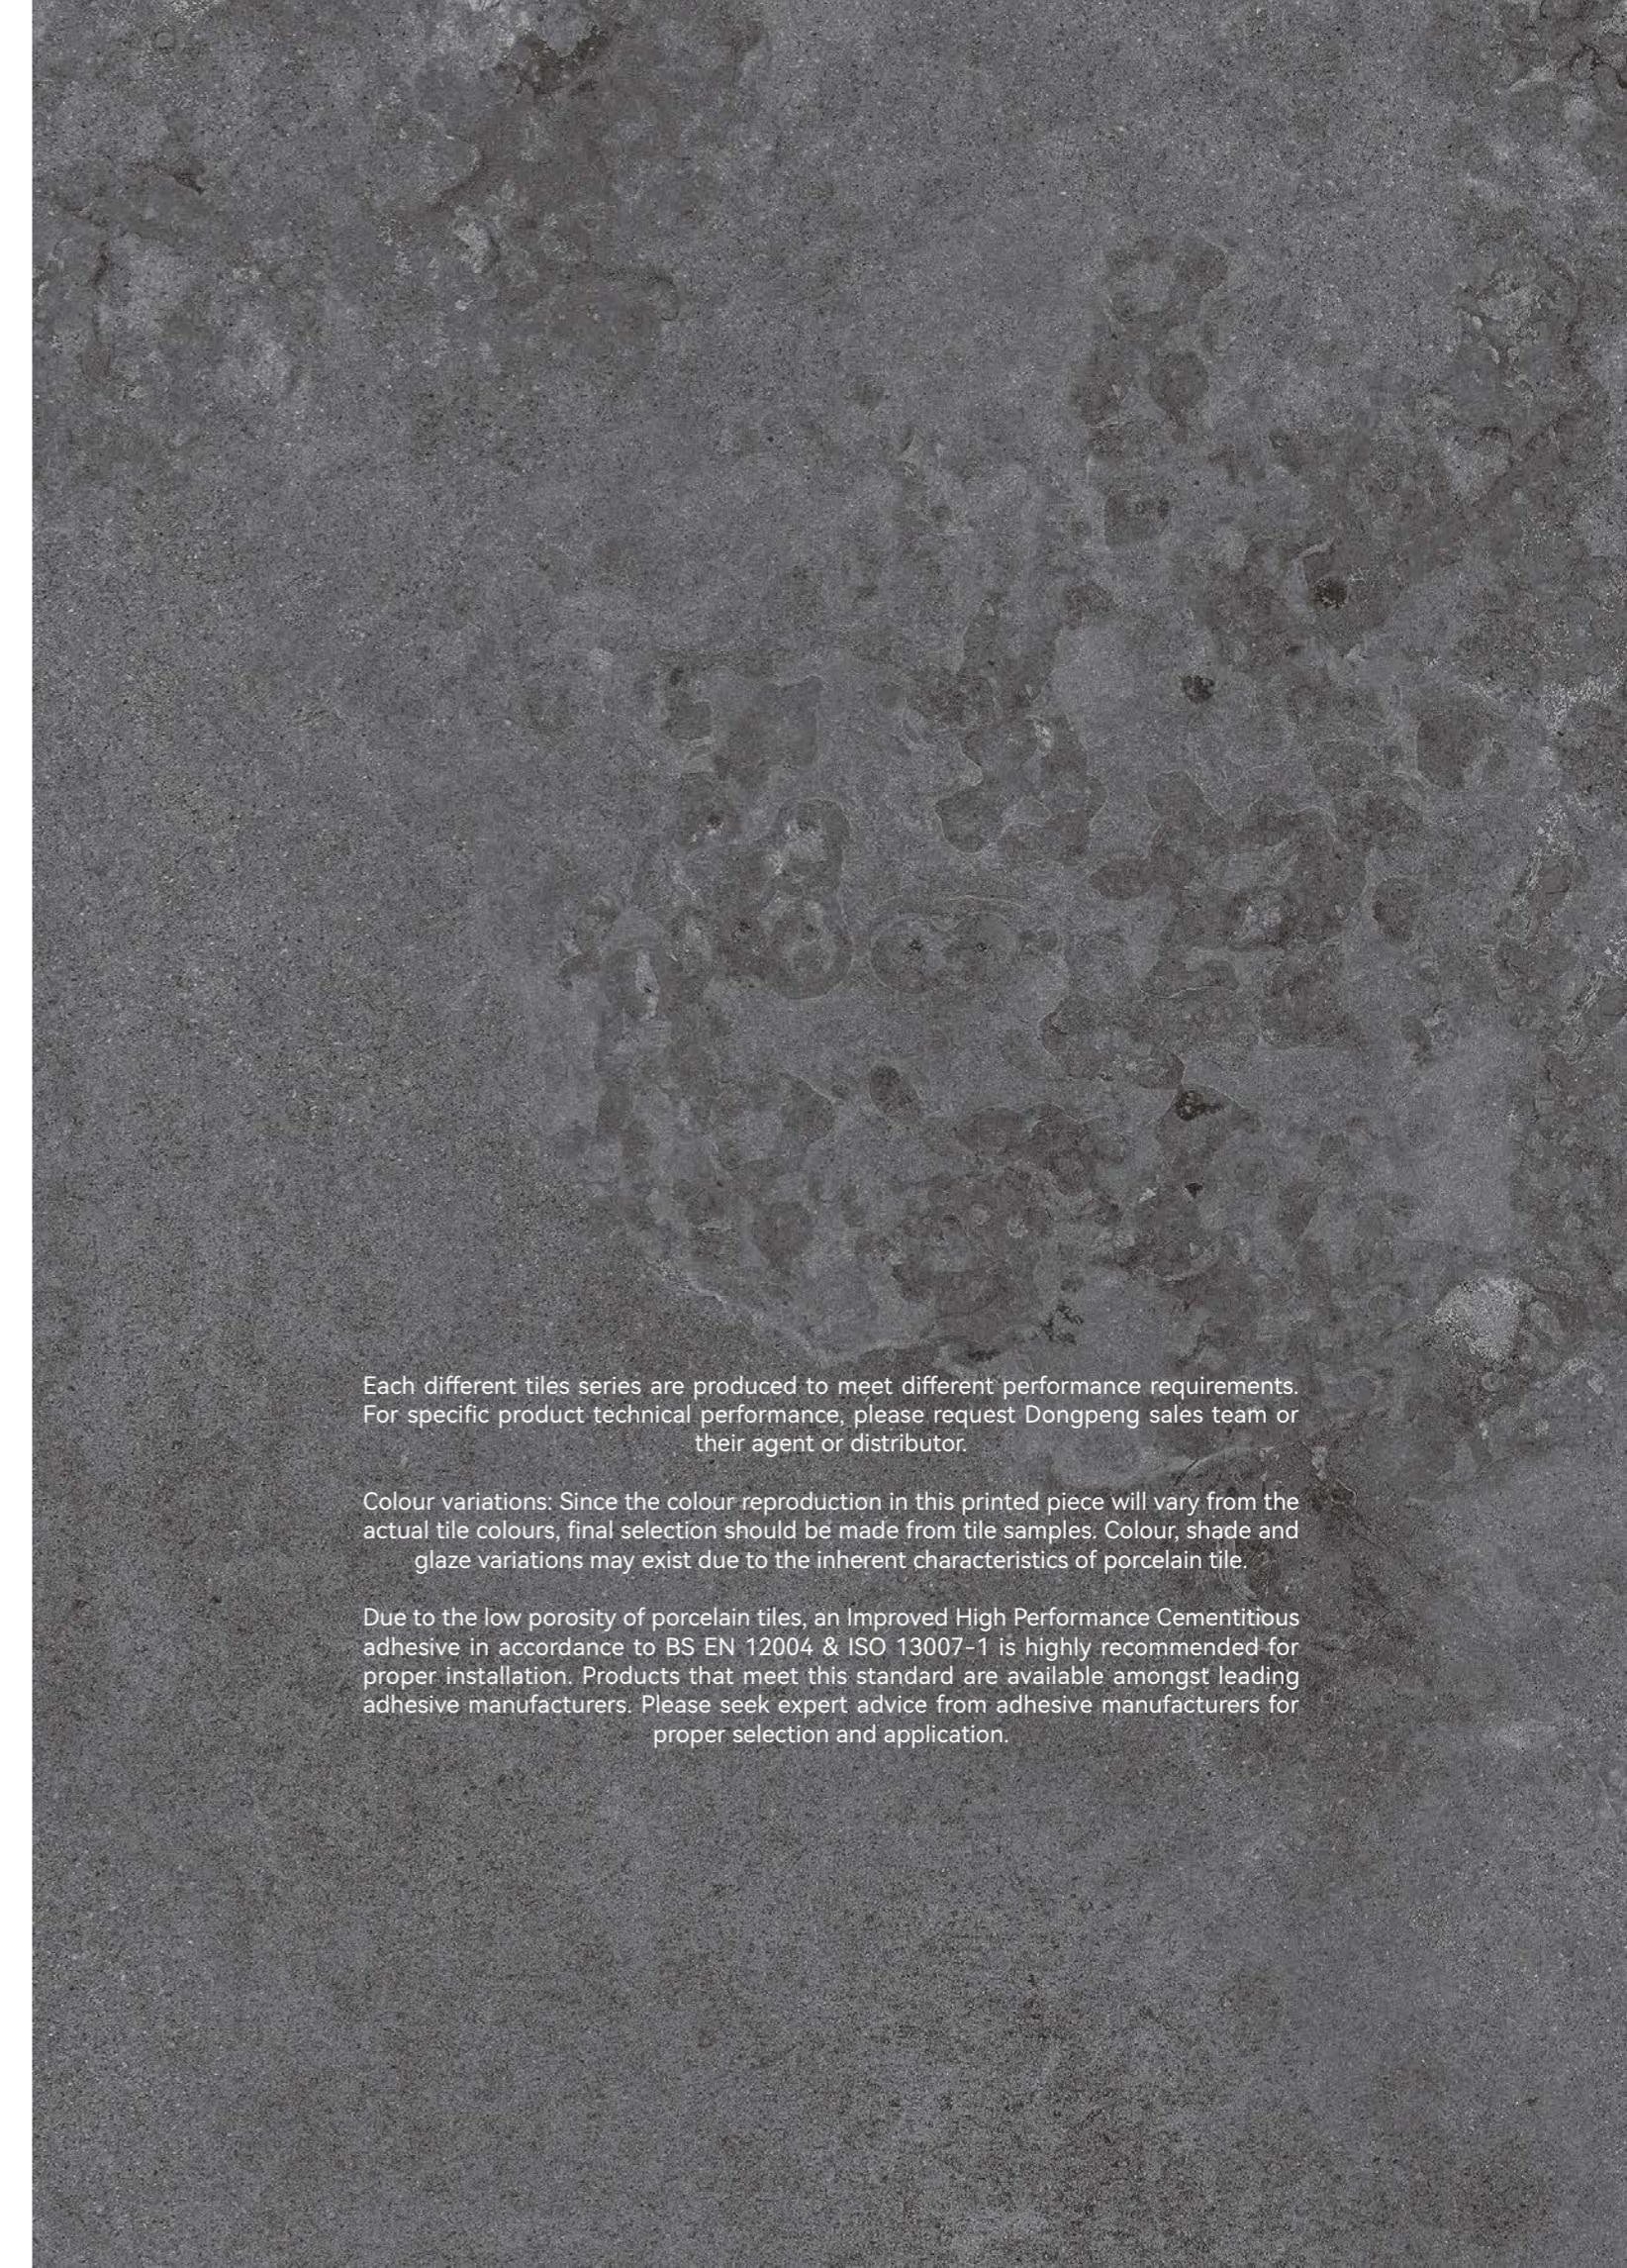

Each different tiles series are produced to meet different performance requirements. For specific product technical performance, please request Dongpeng sales team or their agent or distributor.

Colour variations: Since the colour reproduction in this printed piece will vary from the actual tile colours, final selection should be made from tile samples. Colour, shade and glaze variations may exist due to the inherent characteristics of porcelain tile.

Due to the low porosity of porcelain tiles, an Improved High Performance Cementitious adhesive in accordance to BS EN 12004 & ISO 13007-1 is highly recommended for proper installation. Products that meet this standard are available amongst leading adhesive manufacturers. Please seek expert advice from adhesive manufacturers for proper selection and application.

