

**MINOS**  
Mix Stone



# Minos Drawing Inspiration From Sandstone

Inspired by the marvels of nature, sandstone has long captivated designers with its unique textures and organic patterns. Each piece of sandstone reveals a harmonious blend of raw and refined beauty, with intricate veins that shift and intertwine to create a visually striking effect.

Its natural variation in color and texture provides endless possibilities, infusing any space with a distinct, earthy elegance.

# Exquisite Craftsmanship

Integrated with advanced P4 anti-slip technology, Minos combines elegance with practical safety, making it ideal for high-traffic areas. Its slip-resistant surface provides secure traction while maintaining a smooth and sophisticated finish.

## Refined Texture


Minos features a structured surface that captures the natural beauty of sandstone while enhancing durability. This unique texture deepens visual appeal and provides a comfortable tactile experience.

# MINOS

Our Minos series embodies timeless design, inspired by the natural beauty of sandstone. Each tile features vibrant color variations and layered textures that reflect nature's organic patterns, adding tactile and visual richness to any space. Minos effortlessly blends warmth and versatility, making it perfect for both interior and exterior applications, and offering endless design possibilities.

With advanced P4 anti-slip technology, Minos combines safety with elegance. Ideal for high-traffic commercial areas and residential spaces, its slip-resistant surface meets P4 standards while maintaining a smooth and refined finish. The balance of functionality and aesthetic appeal makes Minos an excellent choice for spaces where beauty and practicality are key.

• •

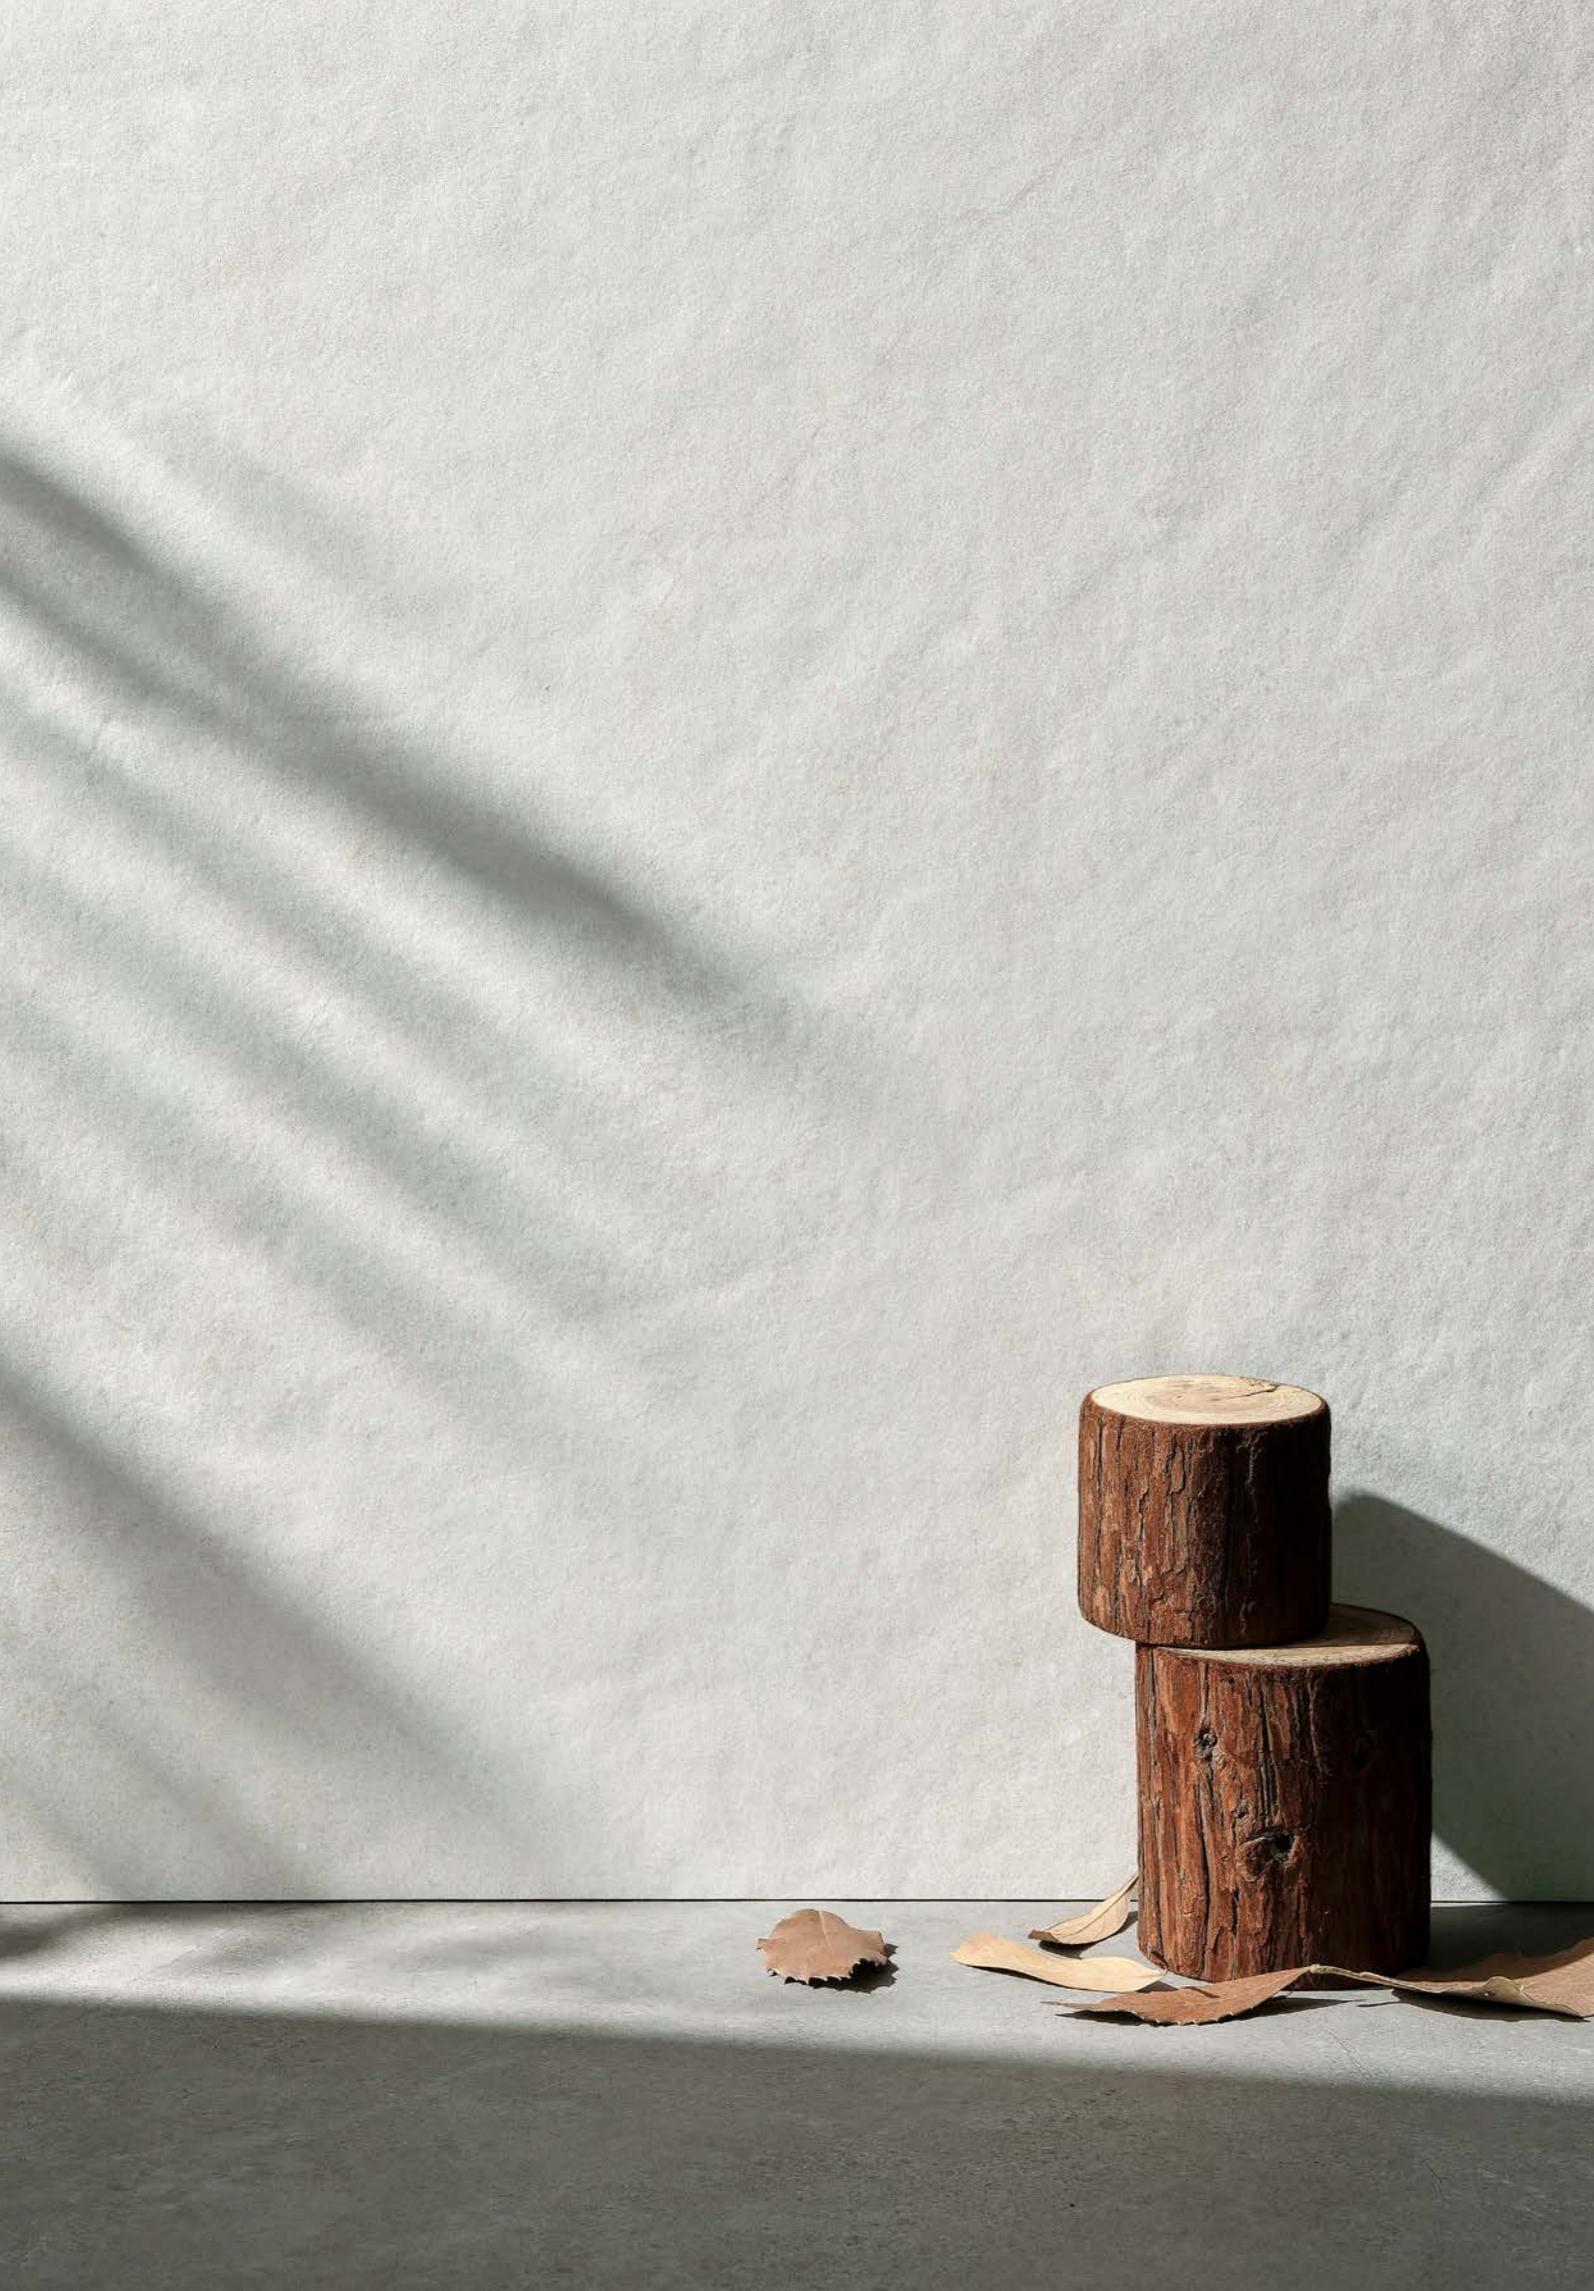

**4** COLORS  
**3** SIZES

Grey

Cream

Dune

Bianco



### Bianco

Floor: YSR270431

Finish: Antislip (P4)

Size: 600x1200mm / 24"x48"



### Cream

Floor: YSR600432

Finish: Antislip (P4)

Size: 600x600mm / 24" x 24"






Cream

Floor: YSR270432

Finish: Antislip (P4)

Size: 600x1200mm / 24"x48"

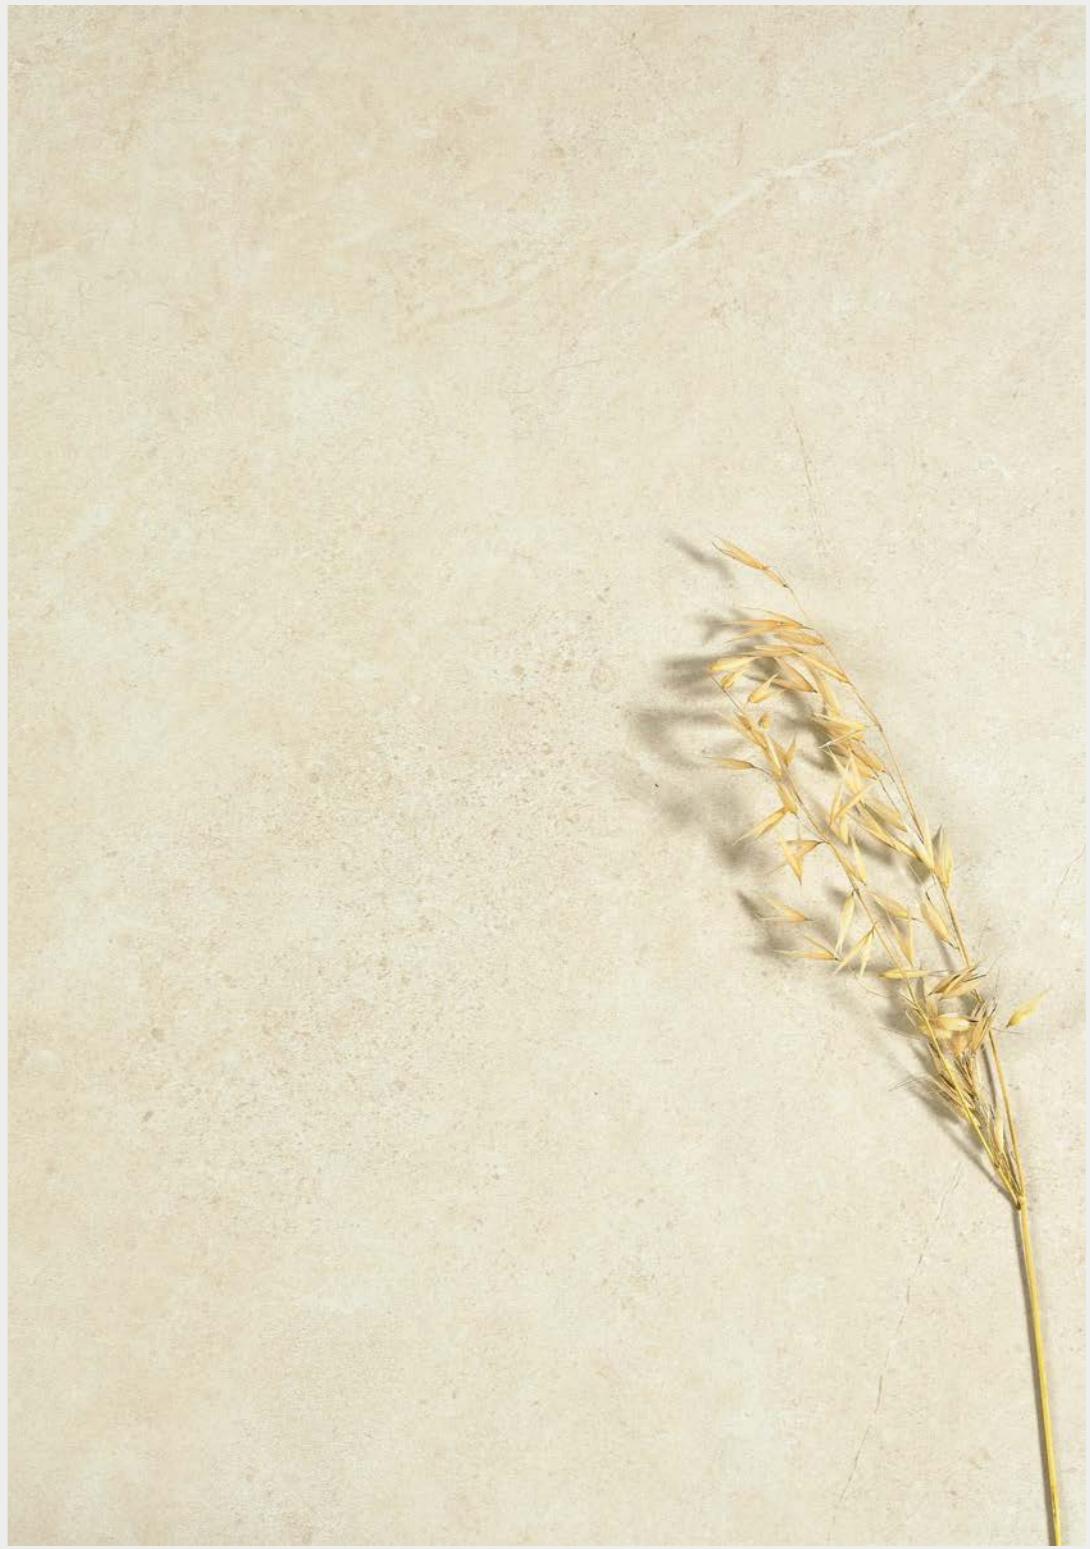

•

•



**Cream**

Floor: YSR600432

Finish: Antislip (P4)

Size: 600x600mm / 24"x24"



### Cream

Floor: YSR270432

Finish: Antislip (P4)

Size: 600x1200mm / 24"x48"



### Cream

Floor: YSR600432

Finish: Antislip (P4)

Size: 600x600mm / 24"x24"




### Dune

Floor+Wall: YSR270433

Finish: Antislip (P4)

Size: 600x1200mm / 24"x48"

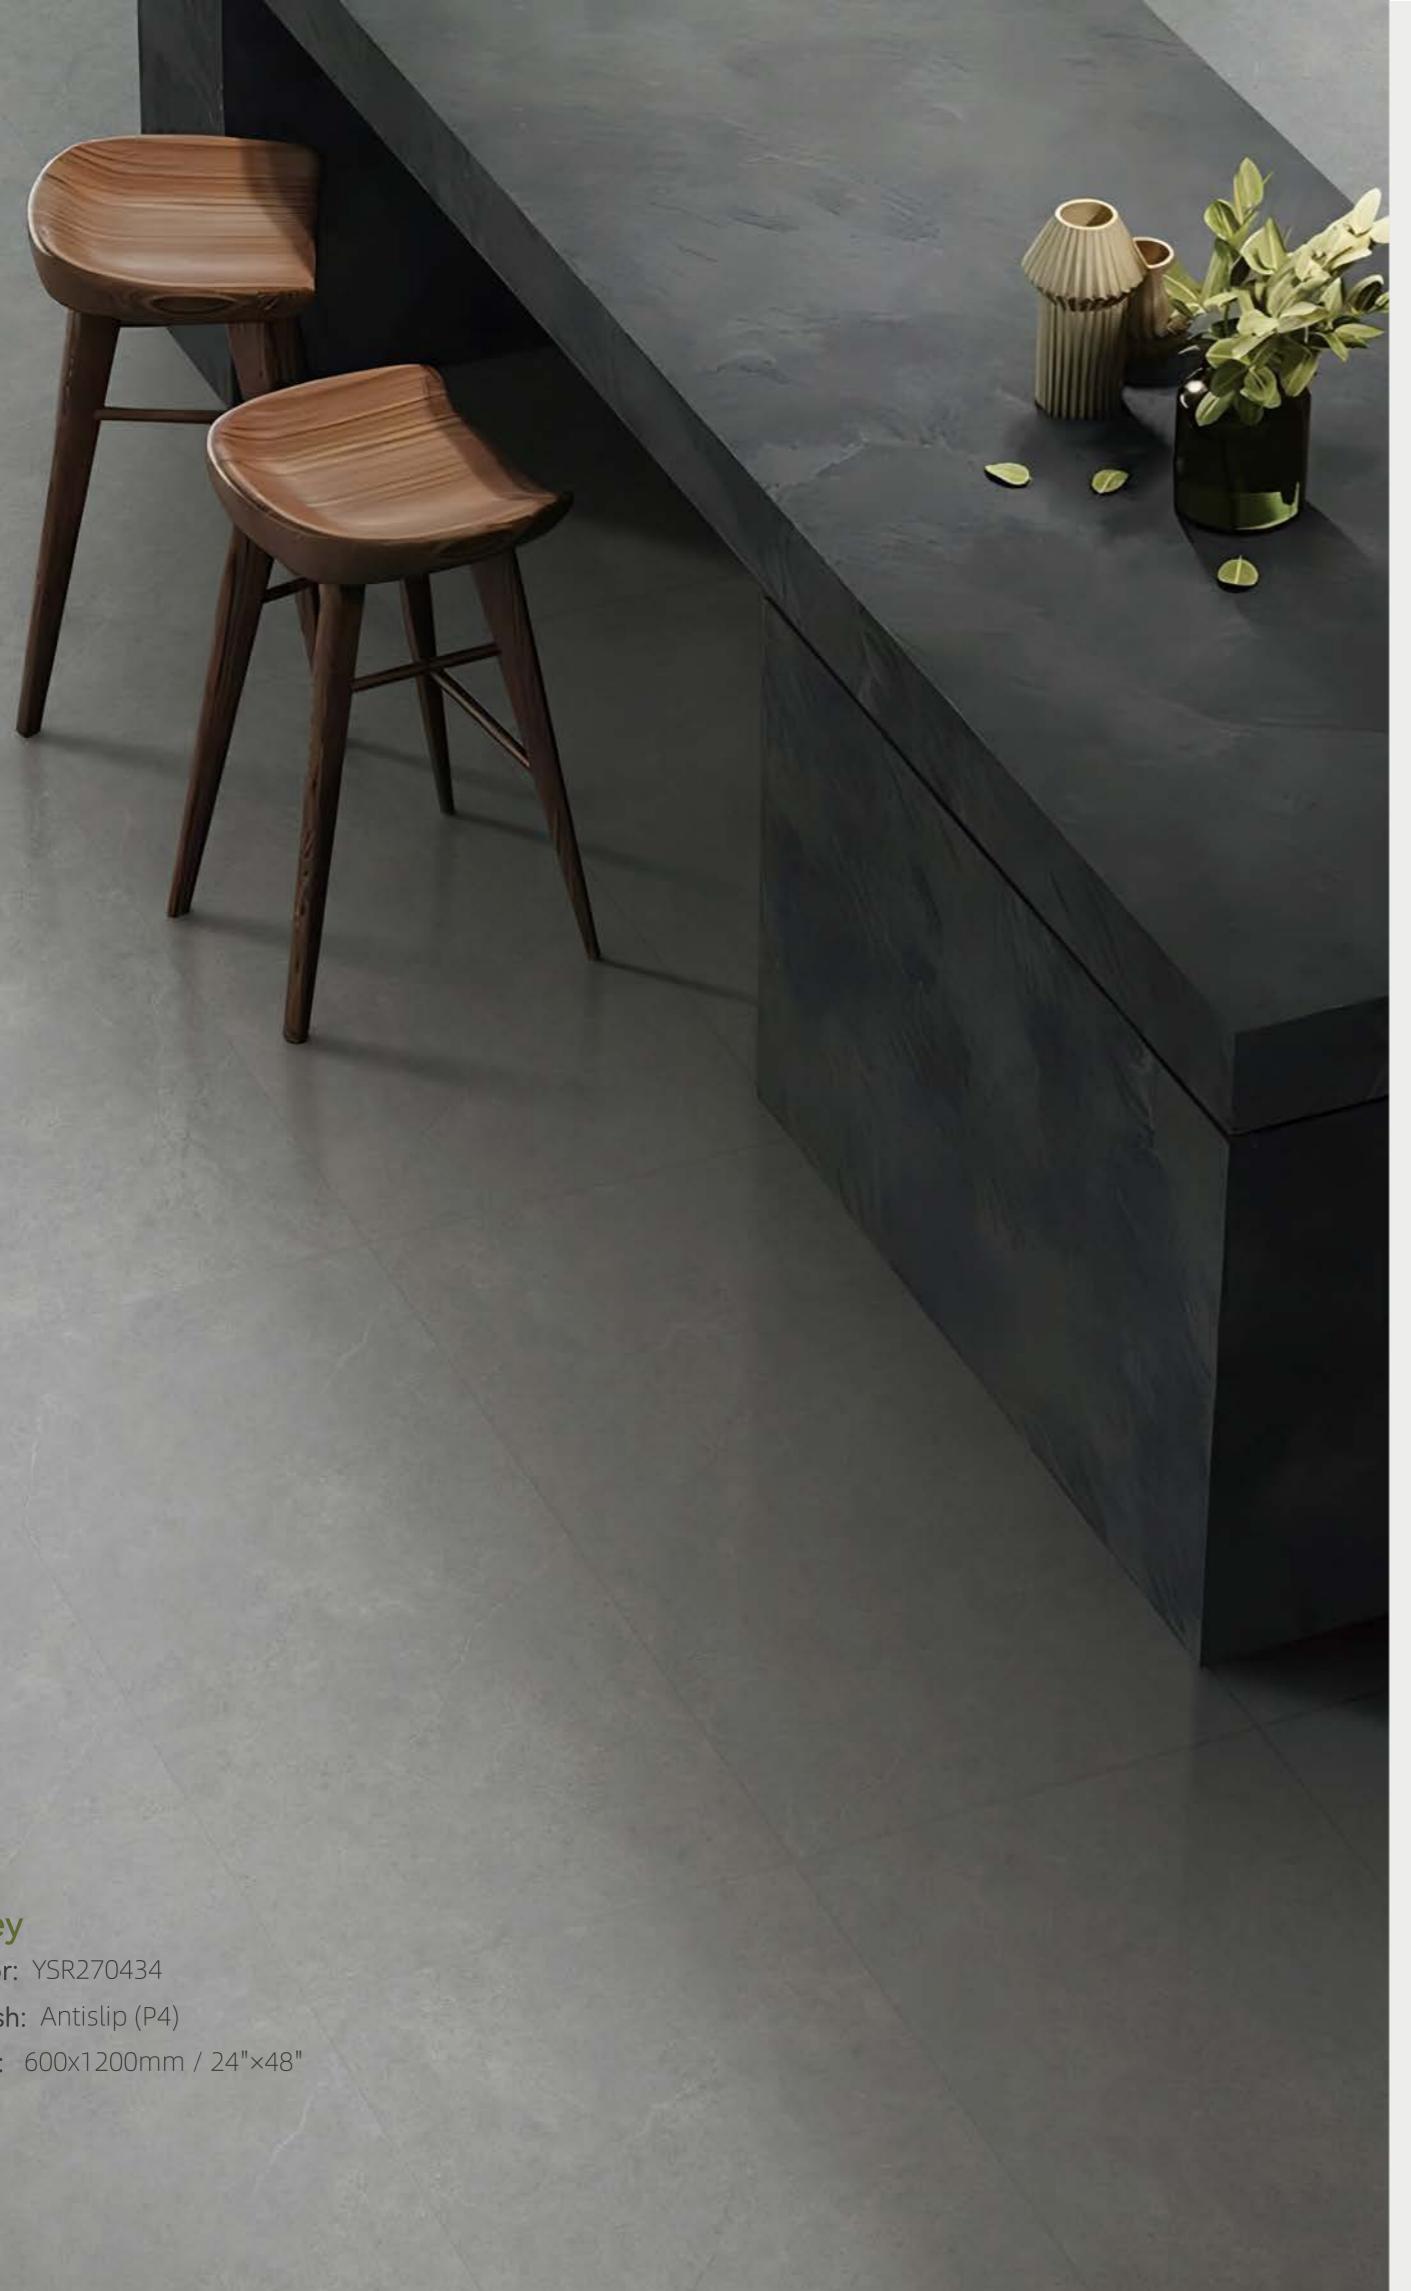

**Grey**

Floor: YSR270434

Finish: Antislip (P4)

Size: 600x1200mm / 24"x48"



•

•

# MINOS


## Bianco

### ■ Antislip (P4)

YSR270431 600x1200mm/24"x48"

YSR600431 600x600mm/24"x24"

YSR630431 300x600mm/12"x24"

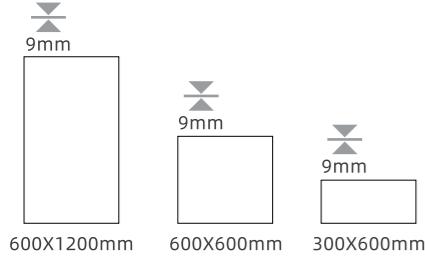

### Multi-Texture Display



### Technical Info | Recommended Application



### Shade Variation



Slight Variation

# MINOS


## Cream

### ■ Antislip (P4)

YSR270432 600x1200mm/24"x48"

YSR600432 600x600mm/24"x24"

YSR630432 300x600mm/12"x24"

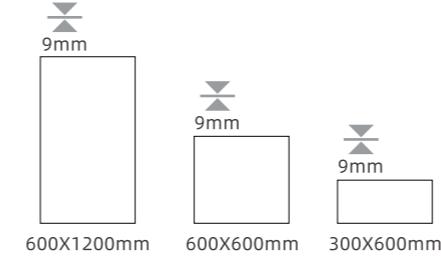

### Multi-Texture Display



### Technical Info | Recommended Application



### Shade Variation




Slight Variation

# MINOS

Dune

## ■ Antislip (P4)

YSR270433	600x1200mm/24"x48"
YSR600433	600x600mm/24"x24"
YSR630433	300x600mm/12"x24"

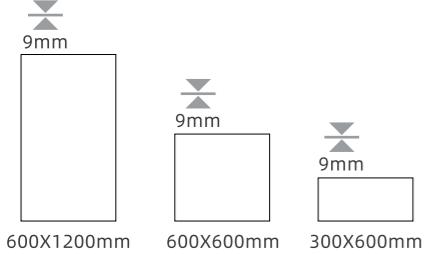

## Multi-Texture Display



600X600mm

FACES 6

## Technical Info | Recommended Application



## Shade Variation




Slight Variation

# MINOS

Grey

## ■ Antislip (P4)

YSR270434	600x1200mm/24"x48"
YSR600434	600x600mm/24"x24"
YSR630434	300x600mm/12"x24"

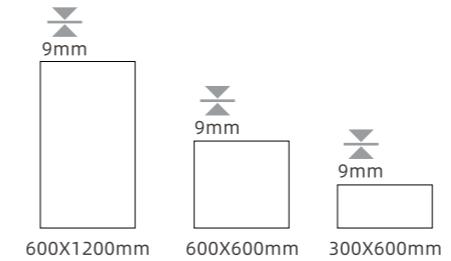

## Multi-Texture Display



600X600mm

FACES 6

## Technical Info | Recommended Application



## Shade Variation




Slight Variation

## The Range

			Bianco	Cream	Dune	Grey	
600×1200mm 24"×48"	9mm	Antislip(P4)	YSR270431	YSR270432	YSR270433	YSR270434	
600×600mm 24"×24"	9mm	Antislip(P4)	YSR600431	YSR600432	YSR600433	YSR600434	
300×600mm 12"×24"	9mm	Antislip(P4)	YSR630431	YSR630432	YSR630433	YSR630434	

## Decor Made to Measure

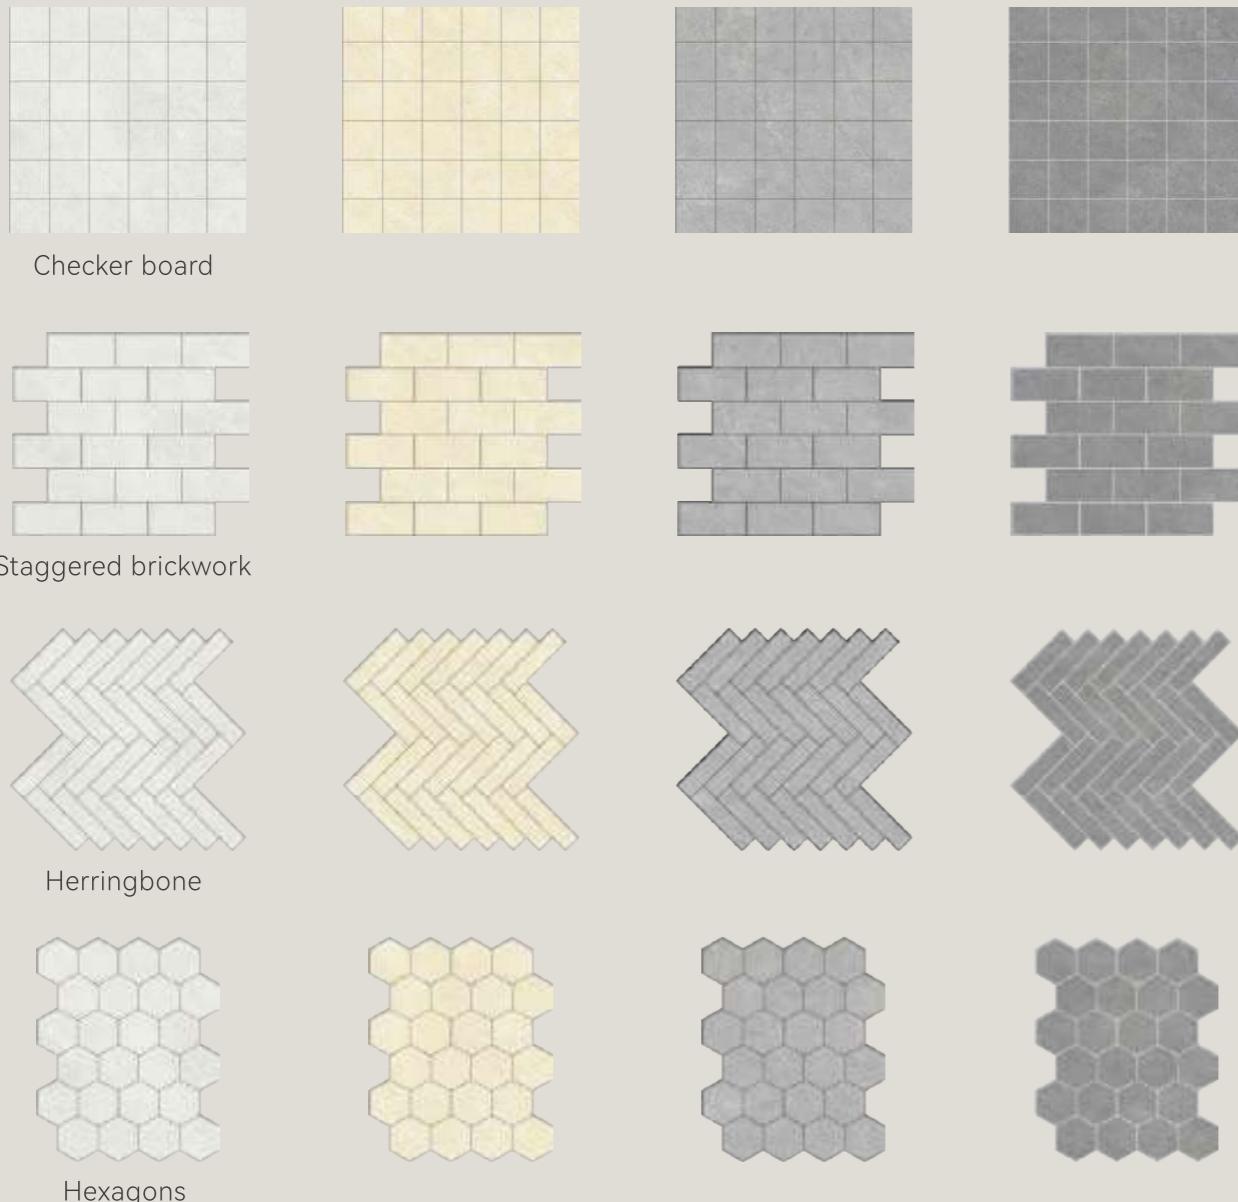


## Technical Guide


Tiles can be cut following the pattern or against the pattern. Special cuts outside this list can be provided under request.

### Special Pieces

#### SLOT




Longitudinal




Square slot

#### SKIRTING




Bull-nose cut




Bevel cut


#### STEPS Anti-slip surface




Bull-nose cut



Bull-nose cut




Bevel cut




Bevel cut


#### STEPS




Bull-nose cut



Bevel cut



Bevel joint



Bevel joint

## Technical Standard

	PROPERTIES	UNIT	ISO STANDARD REQUIREMENT			RESULT
	Size & Deviation	%	SIDE	The deviation of the average size for each tile from the work size	±0.6	-0.02+0.03
				Thickness	±5	-0.1+1.0
	Water absorption	%	Average:E ≤ 0.5		0.3	
			Individual maximum:E ≤ 0.6		0.3	
	Breaking strength	N	When the thickness ≥ 7.5mm, the mean value shall not be less than 1300		2183	
	Anti-slip	R	9		9	
	Coefficient of linear The rmal expansion		Test method available		6.5x10 <sup>-6</sup> C <sup>-1</sup>	
	Resistance to thermal shock		Test method available		Guaranteed	
	Frost Resistance		Required		Required	
	Resistance to low concentration acid or alkali		Report the result after test		Class GA	
	Stain resistance		No less than Class 3 after test		Class 5	

## Regular Packing Details

SIZE(mm)	PCS/CTN	M2/CTN	KGS/CTN	CTNS/PALLET (1100X1100mm)	M2/PALLET (1100X1100mm)	KGS/PALLET (1100X1100mm)
300x600	8	1.44	29	40	57.6	1160
600x600	4	1.44	29	40	57.6	1160
600x600	6	2.16	44	30	64.8	1320
800x800	3	1.92	43	35	67.2	1505
600x1200	2	1.44	36	60	86.4	2160
600x1200	3	2.16	45	52	112.32	2340
750x1500	2	2.25	46	46	103.5	2116

Each different tiles series are produced to meet different performance requirements. For specific product technical performance, please request Dongpeng sales team or their agent or distributor.

Colour variations: Since the colour reproduction in this printed piece will vary from the actual tile colours, final selection should be made from tile samples. Colour, shade and glaze variations may exist due to the inherent characteristics of porcelain tile.

Due to the low porosity of porcelain tiles, an Improved High Performance Cementitious adhesive in accordance to BS EN 12004 & ISO 13007-1 is highly recommended for proper installation. Products that meet this standard are available amongst leading adhesive manufacturers. Please seek expert advice from adhesive manufacturers for proper selection and application.