

# LEDone


Projects:

Comments:

## Stadium Flood Light 800W Spec

### SPECIFICATIONS:

WATTAGE:	800W
MODEL #:	GL-FL-800W
MANUFACTURER:	Shenzhen Mecer Photoelectric Technology Co., Ltd
LISTED:	CE/ RoHS/ FCC/ETL
INPUT VOLTAGE:	100-277VAC
POWER FACTOR:	0.9
FREQUENCY:	50-60Hz
LUMENS:	87,529.94LM
LUMENS EFFICACY:	107.3LM/W
KELVIN (CCT):	5000K
THD:	<9%
CRI:	80
IP RATING:	IP67
BEAM ANGLE (DEGREE):	10/24/38/60/90°
MATERIALS:	AL+GLASS
DRIVER:	MeanWell
LED LIGHT SOURCE	Cree
LIFE SPAN (HOURS):	>50000H
LENGTH OF WARRANTY (YEARS):	5Years
SIZE(MM):	872 x 567 x 104 MM
WORKING ENVIRONMENT:	-40°C-+80°C
POWER EFFICIENCY:	>90%
NET WEIGHT:	28 Kg
PERCENTAGE OF WATTAGE SAVED:	45 - 50%

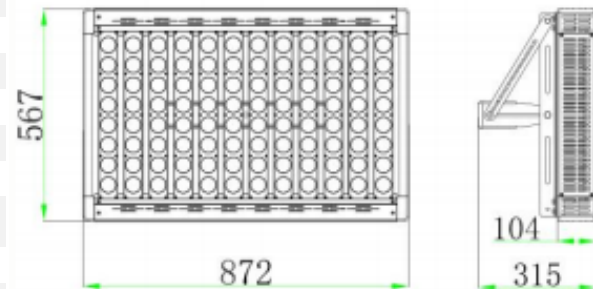

### Features:

System Light Efficacy 100 LPW. Flexible, Modular Design. Multiple Choice of Optical Lenses. Easy Installation & Maintenance.

### Applications:

General flood lighting, corridor lighting, security lighting, and roof top lighting. Can also be used as a high bay.

