
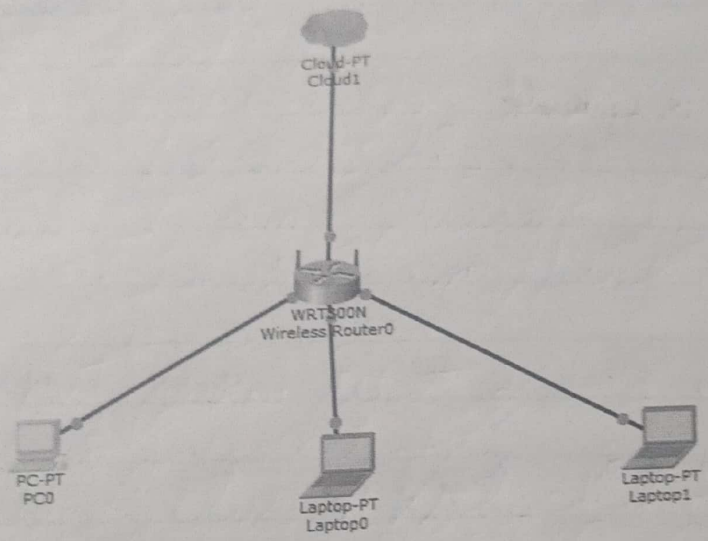


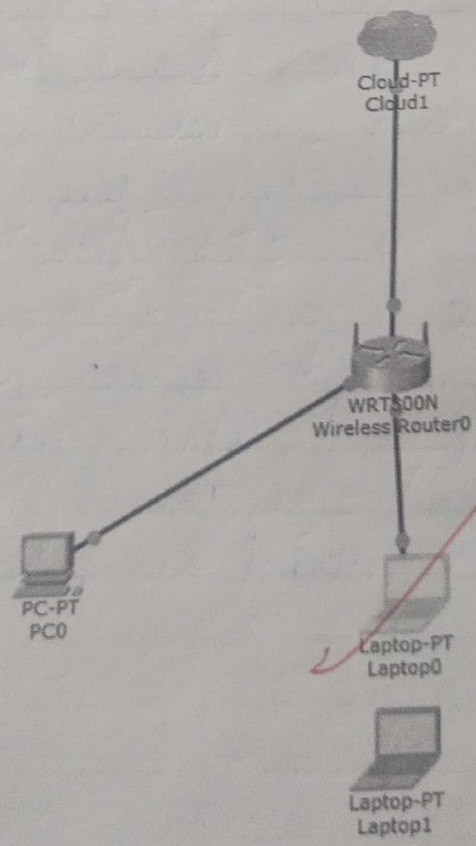

Scanned with OKEN Scanner

DOMS Page No.
Date / /

(6)

Aim:- To Simulate RIP (Routing Information Protocol) using cisco Packet Tracer and observe Packet dynamic routing b/w different networks.

Procedure:-

1. Open cisco Packet tracer
2. Place three routers and two PC's
3. Connect three routers in a triangular.
4. Connect PC0 to router 0 and topology PC1 to router 2.
5. Configure the IP address for all router interfaces and PC Enable the
6. Configure RIP on each router using 'router rip'.
7. Advertise the directly connected network using network command.
8. Verify the routing table Test Connectivity using Ping.

Result:-

Thus RIP was Successfully Simulated using cisco Packet Tracer and dynamic routes Selection and automatic routing were Verified