Factory pick-and-place pilot: ideal state feedback, rigid-body simulation

(a) Panda arm: heavy component, seed 1

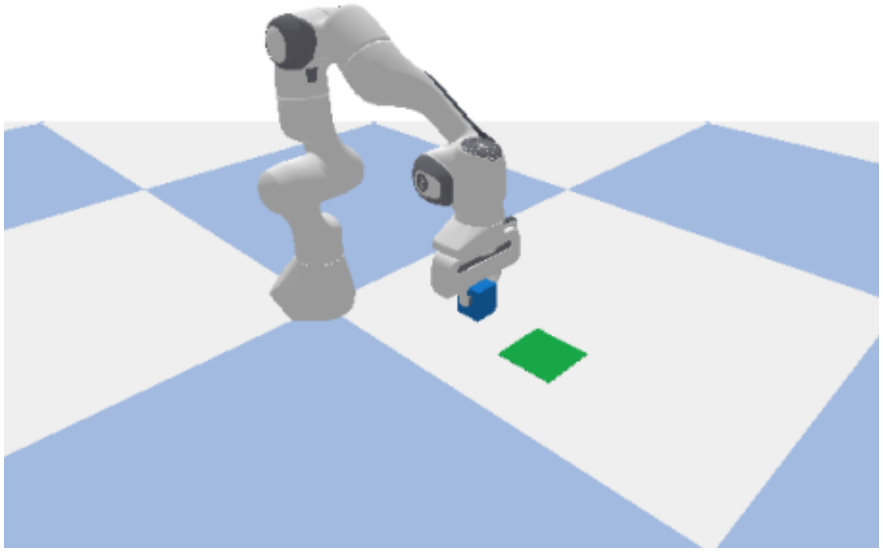

(b) Completed placements

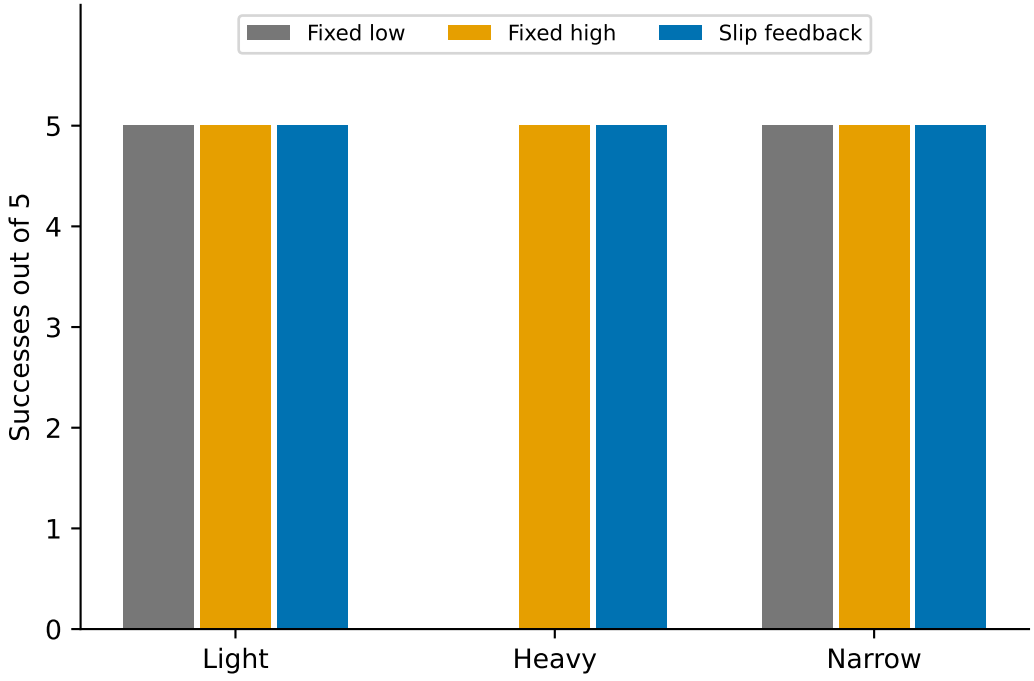

(c) Mean simulated contact loading

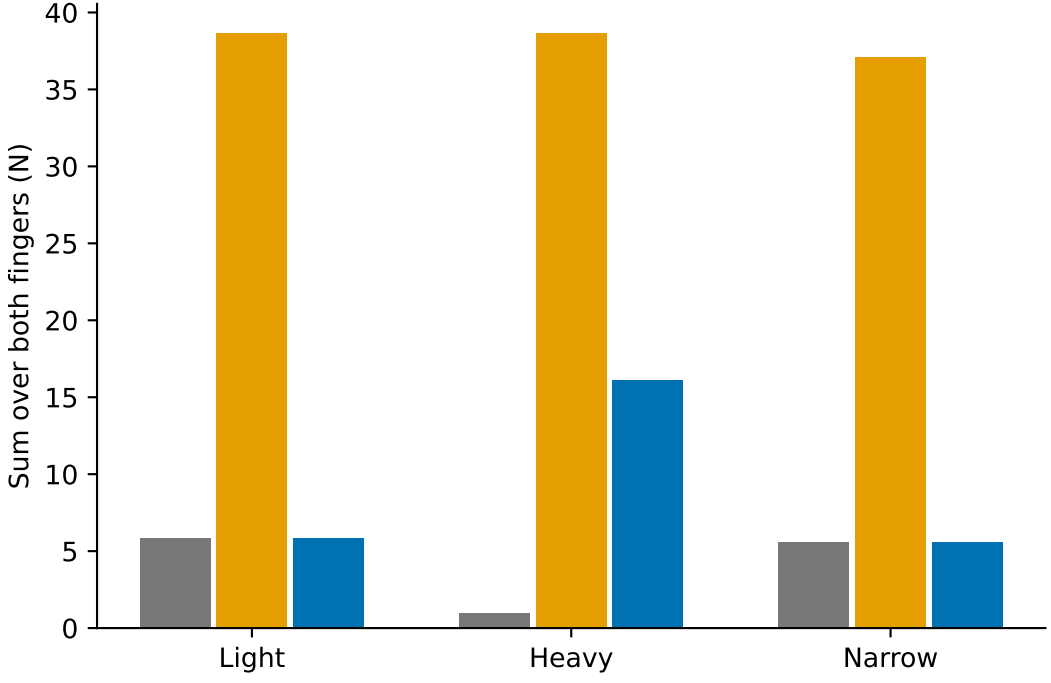
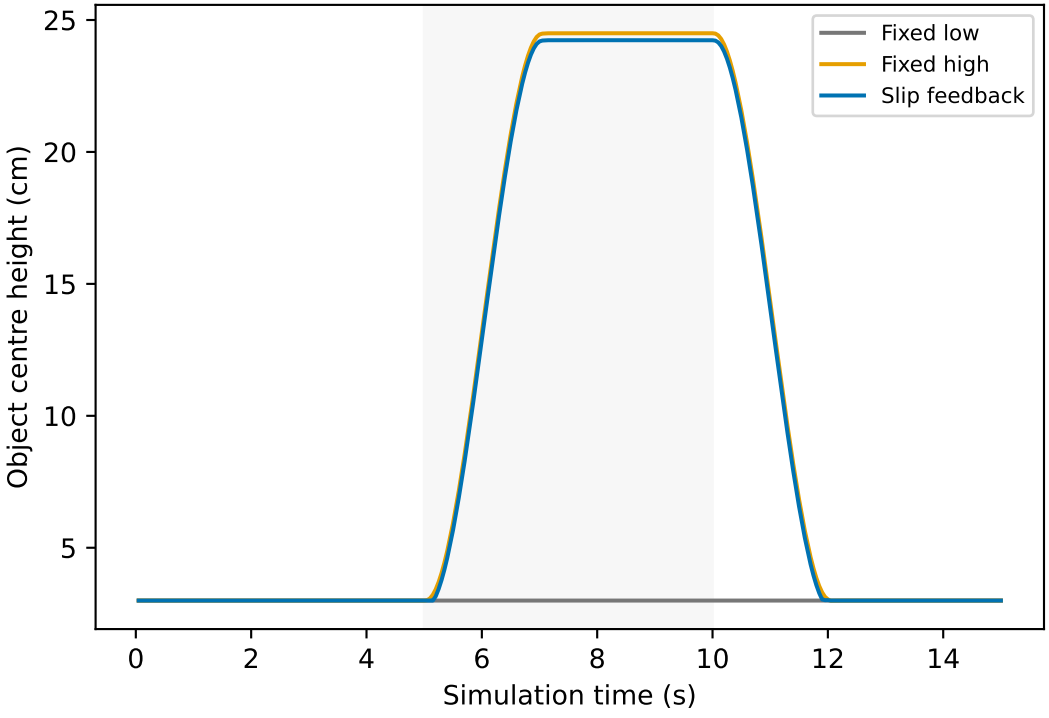
(d) Heavy component: seed 1 trajectory