

NUCLEO64 STM32G4

MB1367

Table of contents

Sheet 1: Project overview (this page)

Sheet 2: Top

Sheet 3: STM32 microcontroller I/Os

Sheet 4: STM32 microcontroller power

Sheet 5: Arduino & Morpho extension connectors


Sheet 6: Power

Sheet 7: ST-Link/V3E

Sheet 8: Mechanical

Legend

- General comment such as function title, configuration, ...
- Text to be added to silkscreen.
- Warning text.



OPEN PLATFORM LICENSE AGREEMENT

The Open Platform License Agreement (“Agreement”) is a binding legal contract between you (“You”) and STMicroelectronics International N.V. (“ST”), a company incorporated under the laws of the Netherlands acting for the purpose of this Agreement through its Swiss branch 39, Chemin du Champ des Filles, 1228 Plan-les-Ouates, Geneva, Switzerland.

By using the enclosed reference designs, schematics, PC board layouts, and documentation, in hardcopy or CAD tool file format (collectively, the “Reference Material”), You are agreeing to be bound by the terms and conditions of this Agreement. Do not use the Reference Material until You have read and agreed to this Agreement terms and conditions. The use of the Reference Material automatically implies the acceptance of the Agreement terms and conditions.

The complete Open Platform License Agreement can be found on www.st.com/opla.


Top






Top.SchDoc





Title: Project overview		
Project: NUCLEO64 STM32G4		
Variant: G474RE		
Revision: D-01		Reference: MB1367
Size: A4	Date: 26-SEP-25	Sheet: 1 of 8






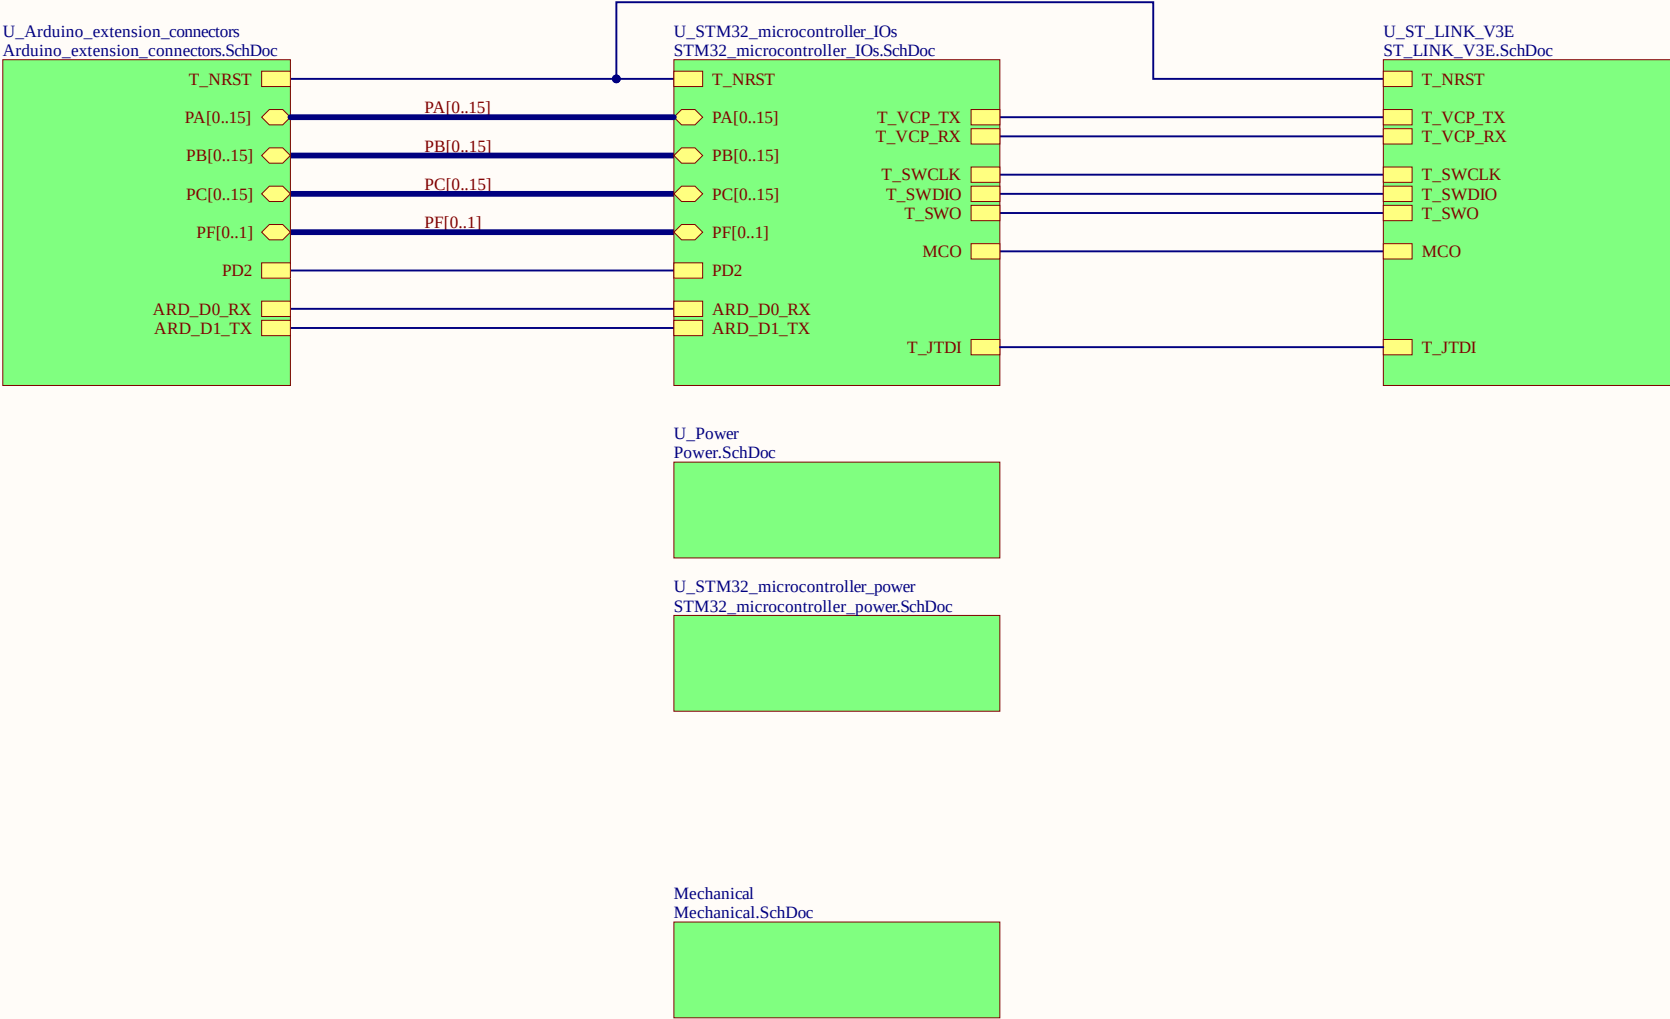

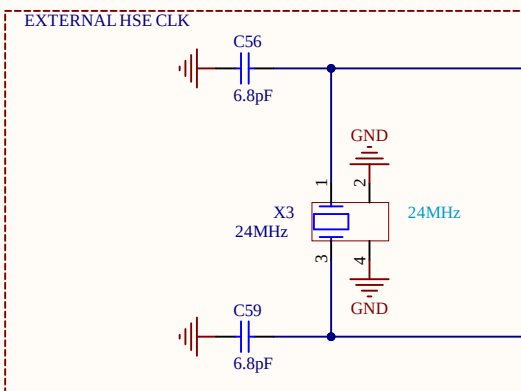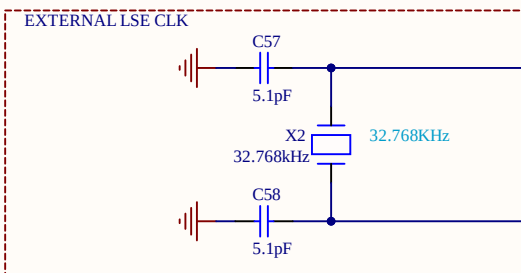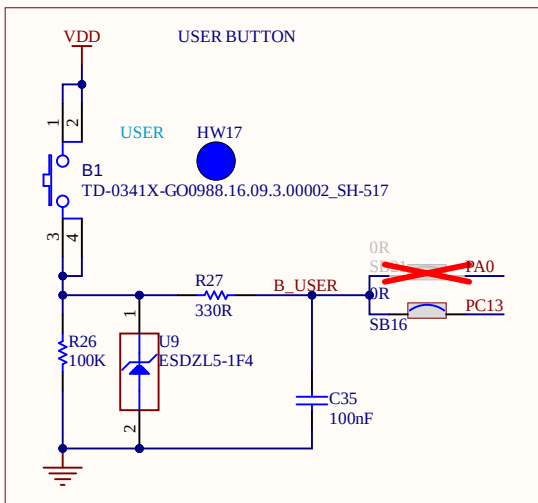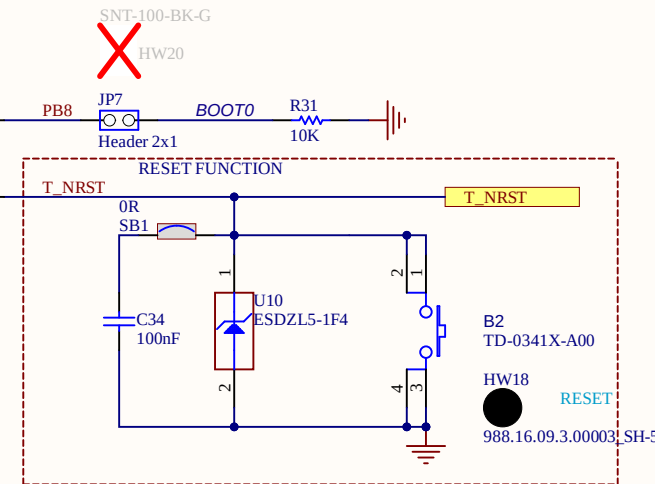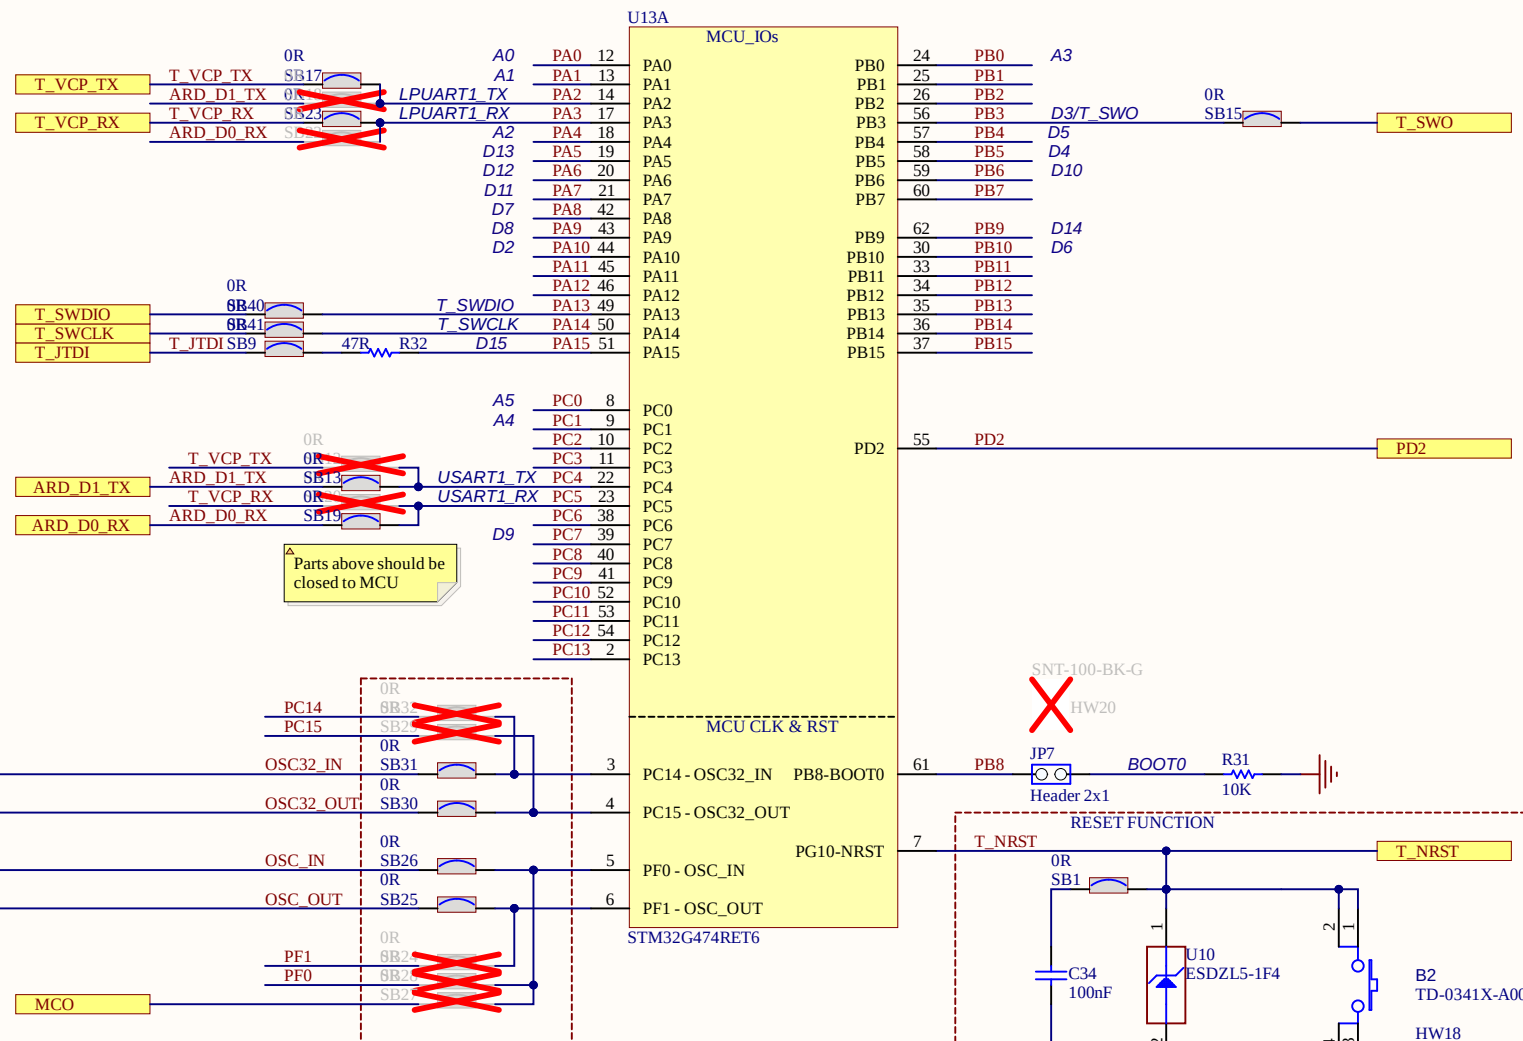

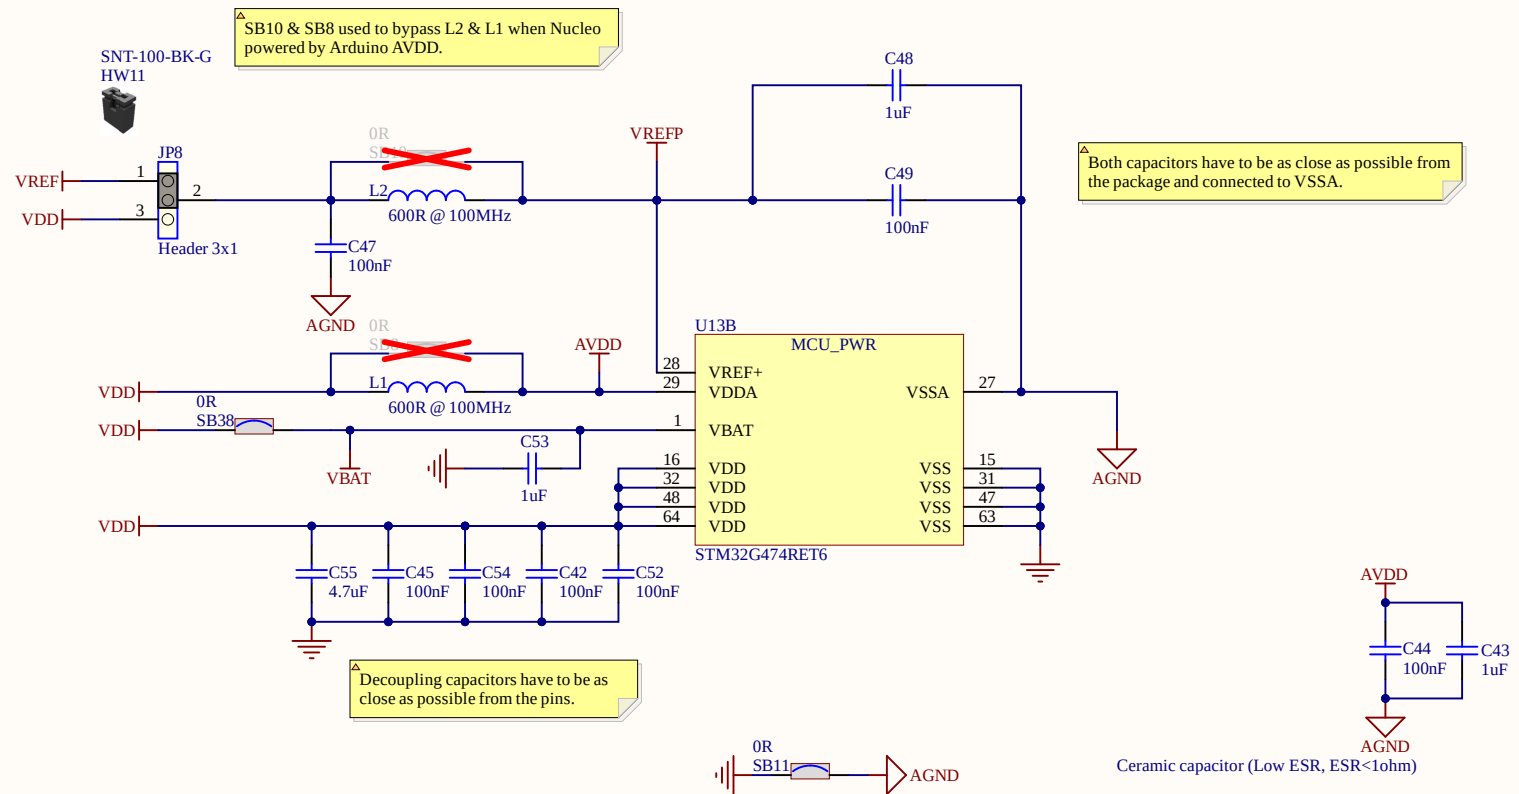

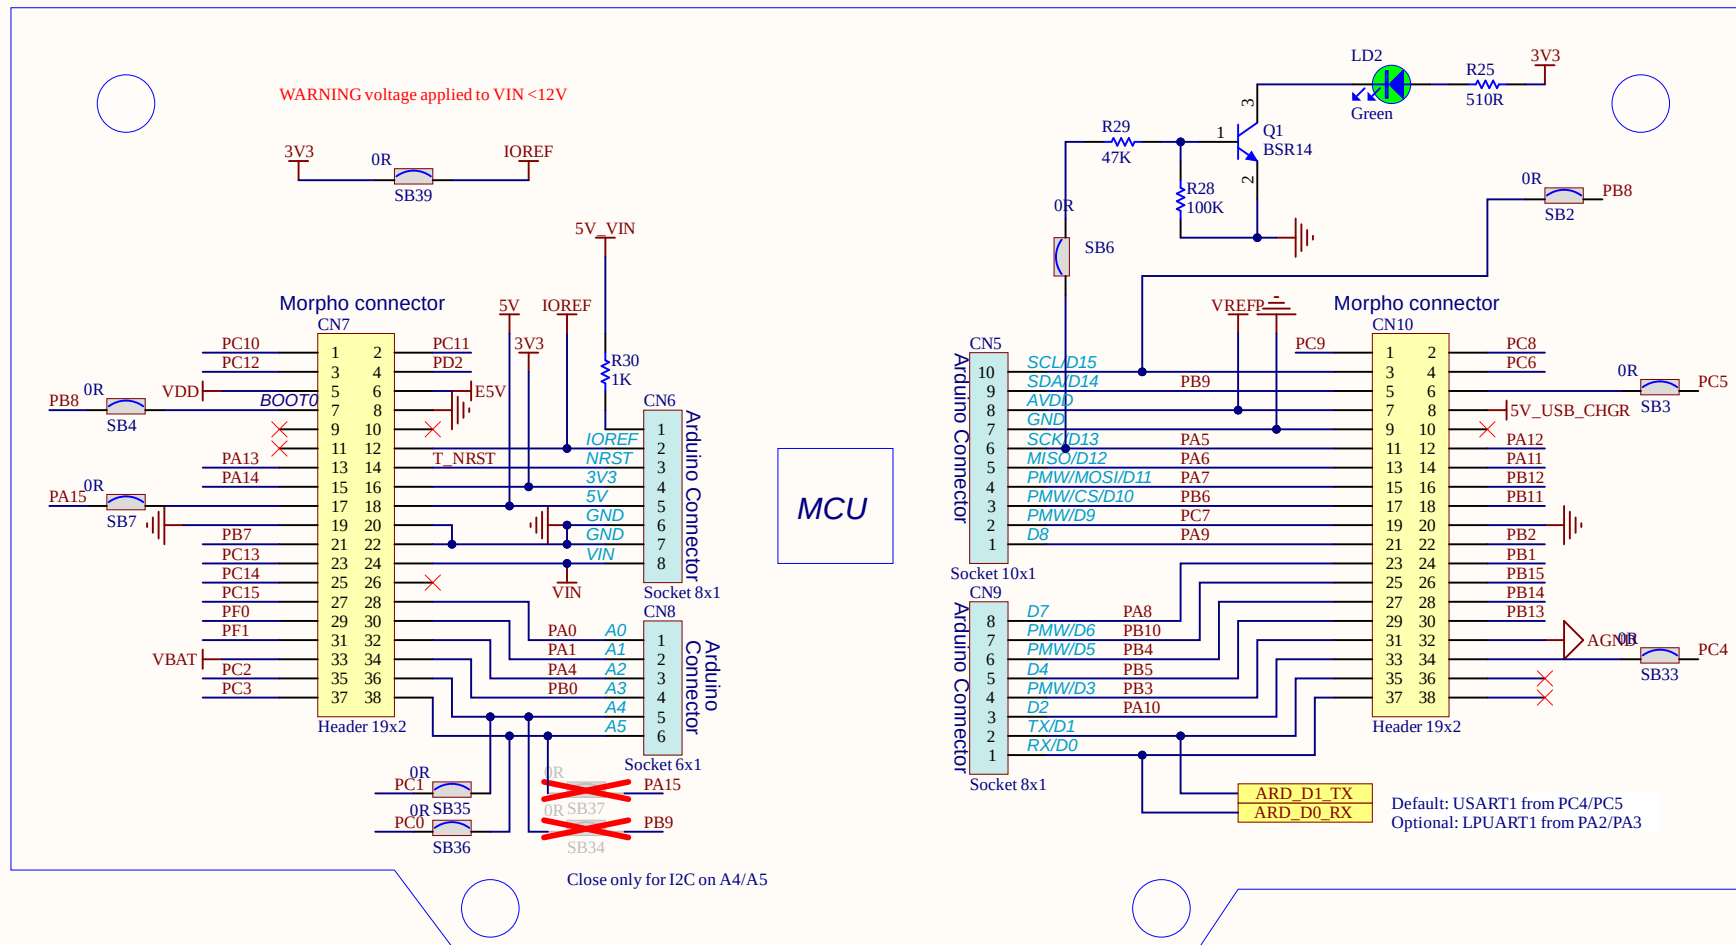

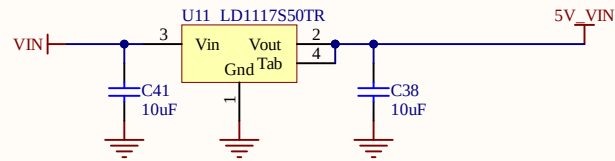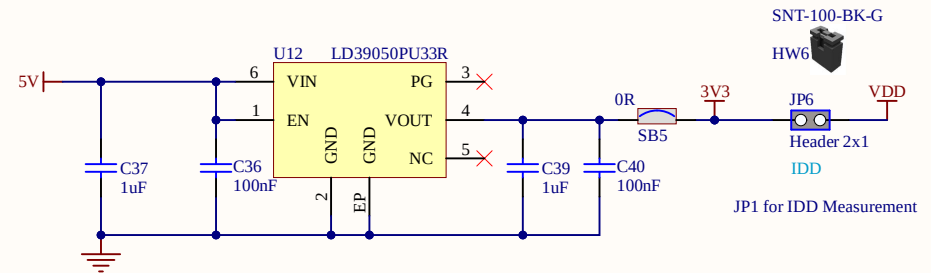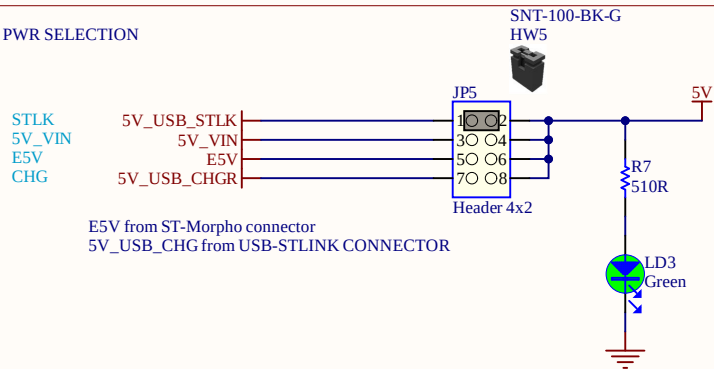[illegible]

5V

R35
180R

Q2
BSR14

C51
100pF

R33
10K

R34
33K

U14
TL1431CL5T

Ref
NC
NC

1
2

3

4

5

AGND


VREF

C50
100nF

C46
10uF

SB14


To have VREF at 3,25V, then SB14 is not fitted. This is the default configuration.
To have VREF at 2,5V, then SB14 is fitted and R34 is not fitted

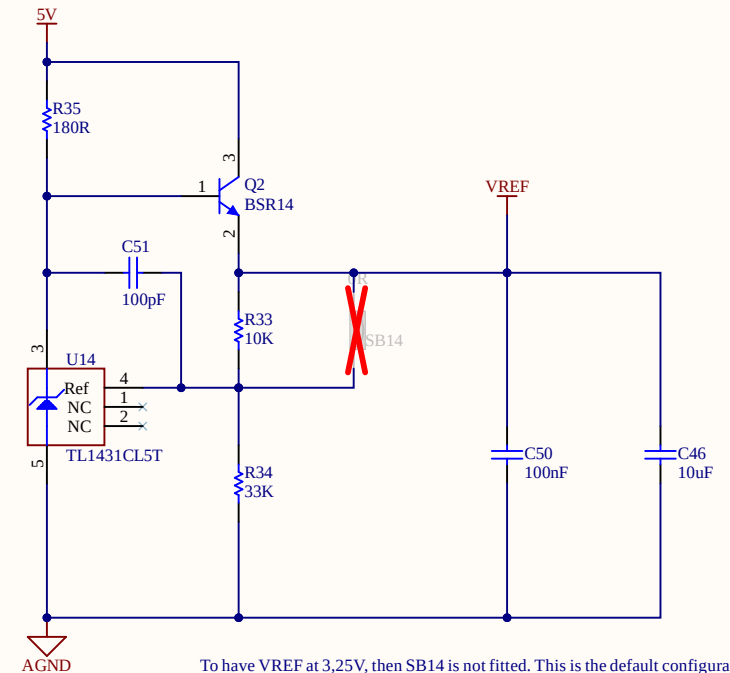


To have VREF at 3,25V, then SB14 is not fitted. This is the default configuration.
To have VREF at 2,5V, then SB14 is fitted and R34 is not fitted




STLINK_MCU

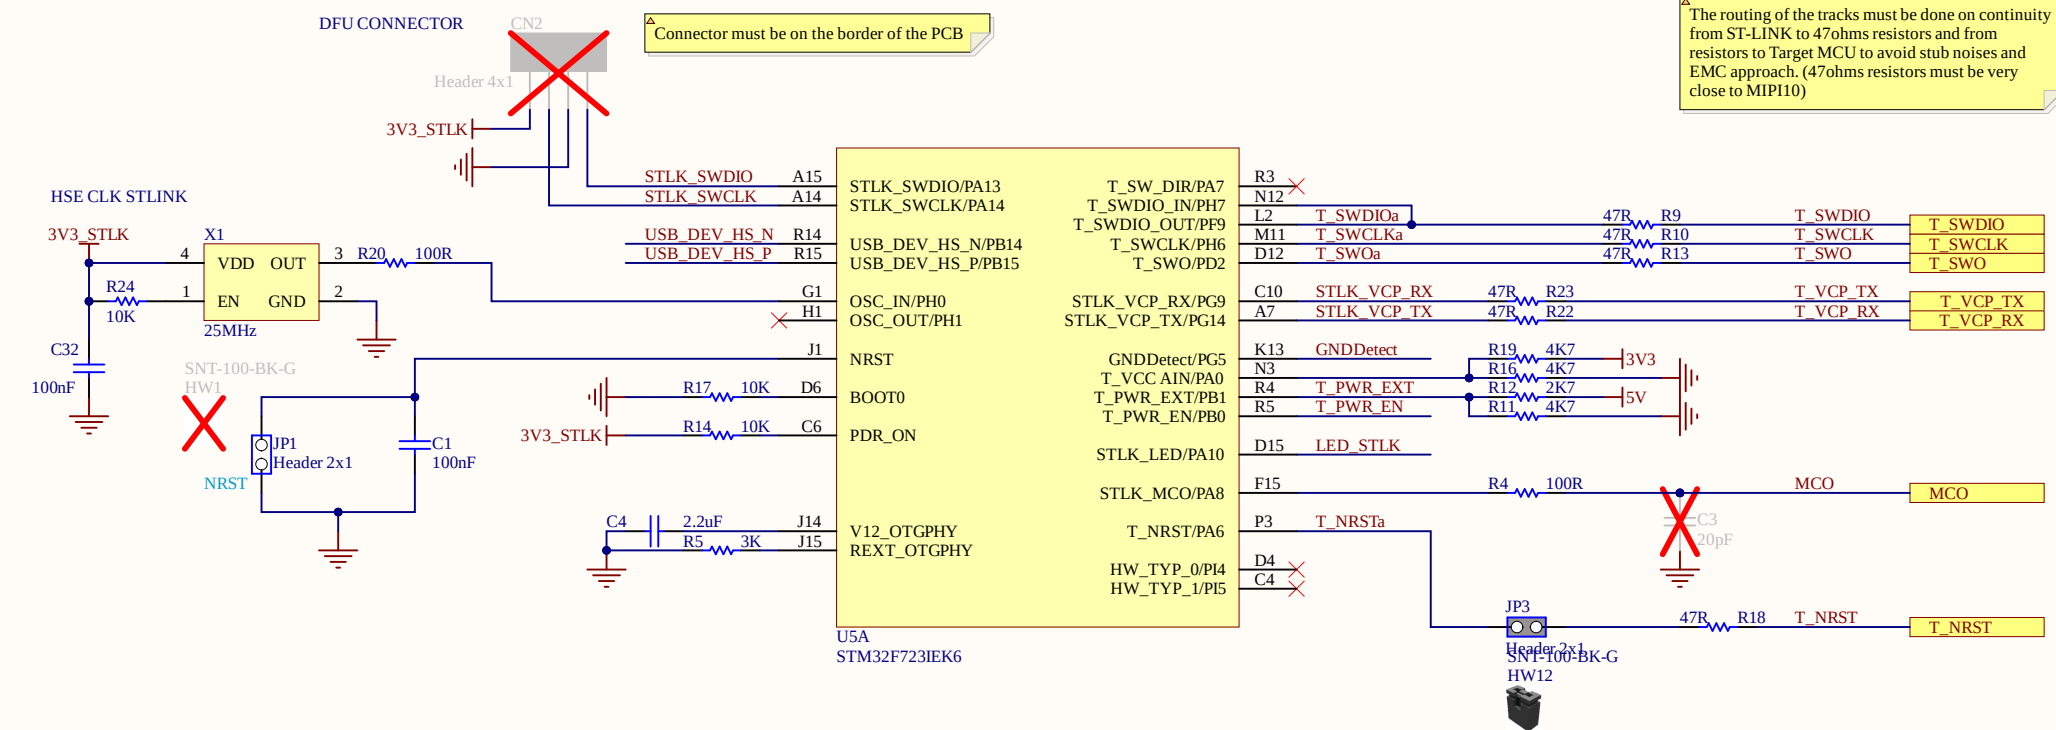


ST-LINK POWER

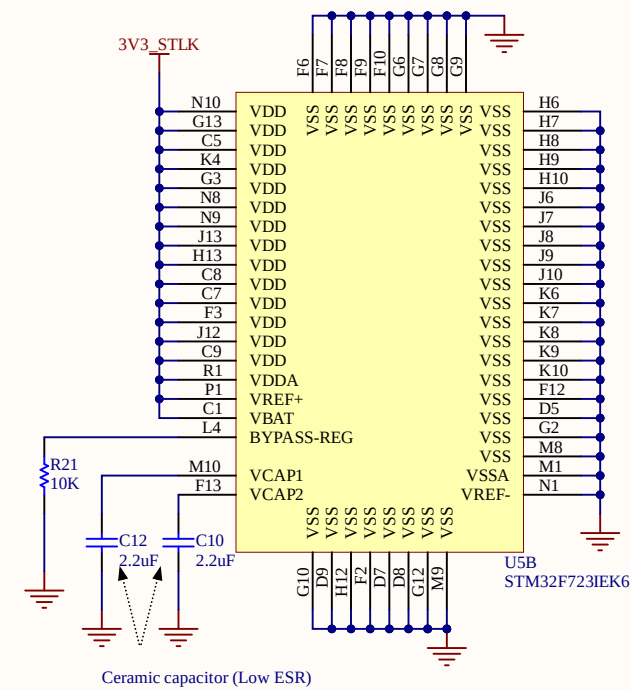


STDC14 Receiver

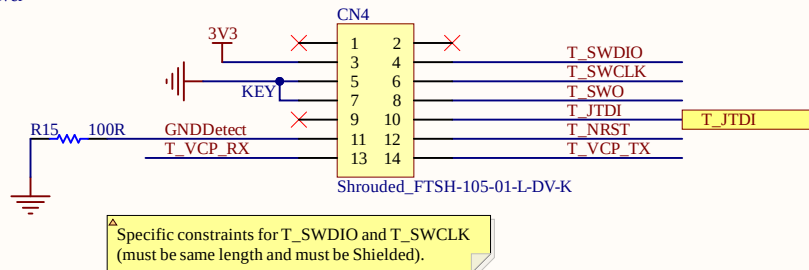


ESD PROTECTIONS

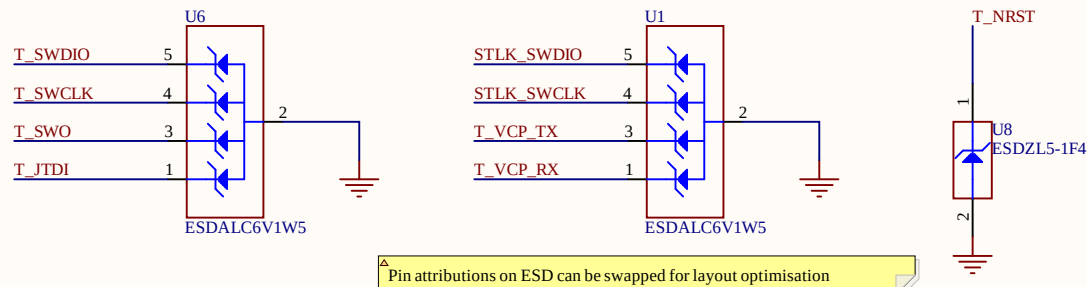



ST-LINK USB CONNECTOR

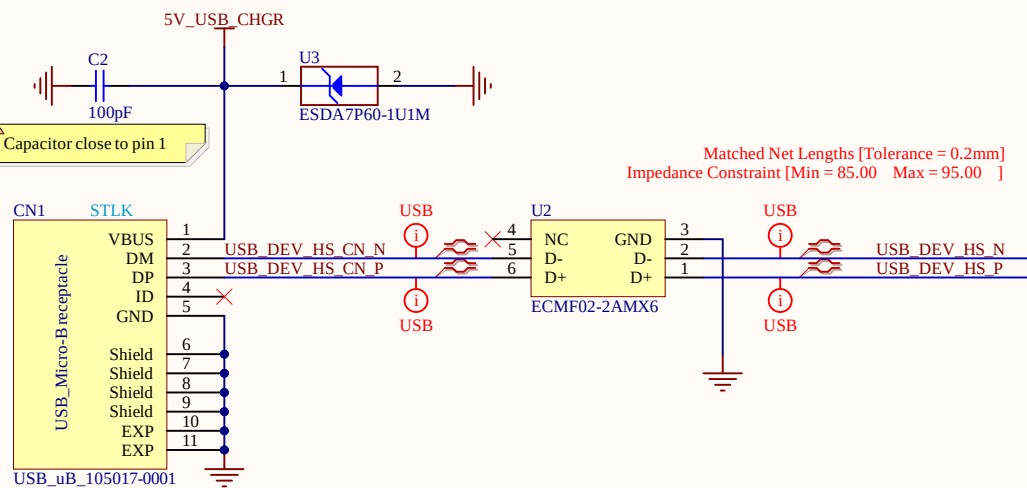

ST-LINK POWER 3V3 / 150mA

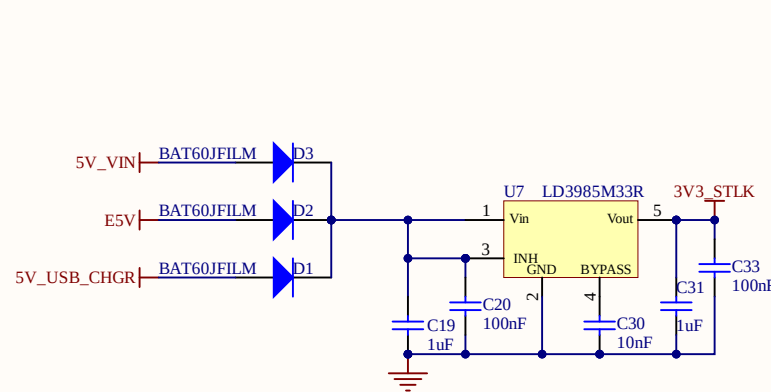

5V ST-LINK PROTECTION

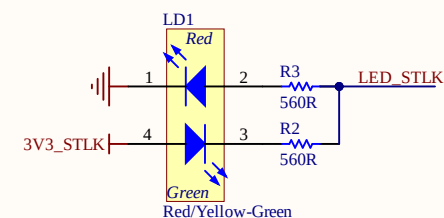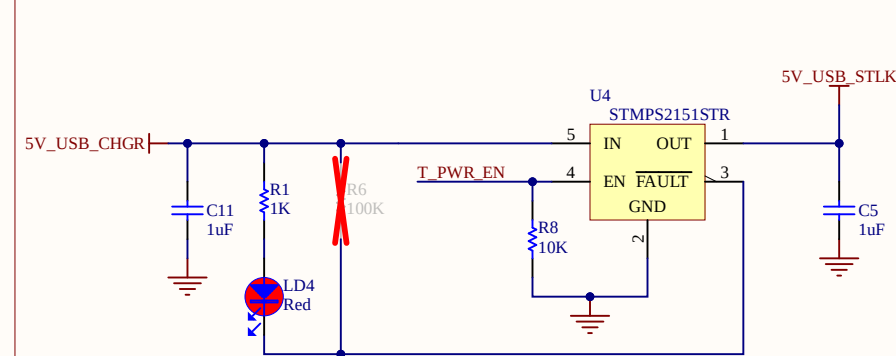

HW101

BOARD REF

N/A

HW102

BOARD CPN

NUCLEO-G4xxRx

HW108

ES

N/A

HW100

PCB

N/A

HW103

LOGO NUCLEO

HW106

N/A

HW104

N/A

HW107

N/A







HW105

N/A

HW110



Socket_LQFP64

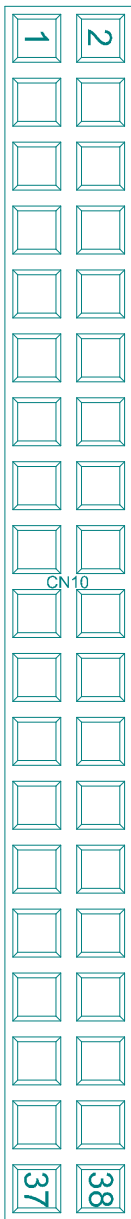

SB35

SB7

SB35

SB40

SB36

SB38

SB9

SB9

SB15

SB15

SB33

SB33

SB13

SB17

SB33

SB33

SB5

SB11

SB19

SB23


SB1

SB2

SB3

SB6

SB3

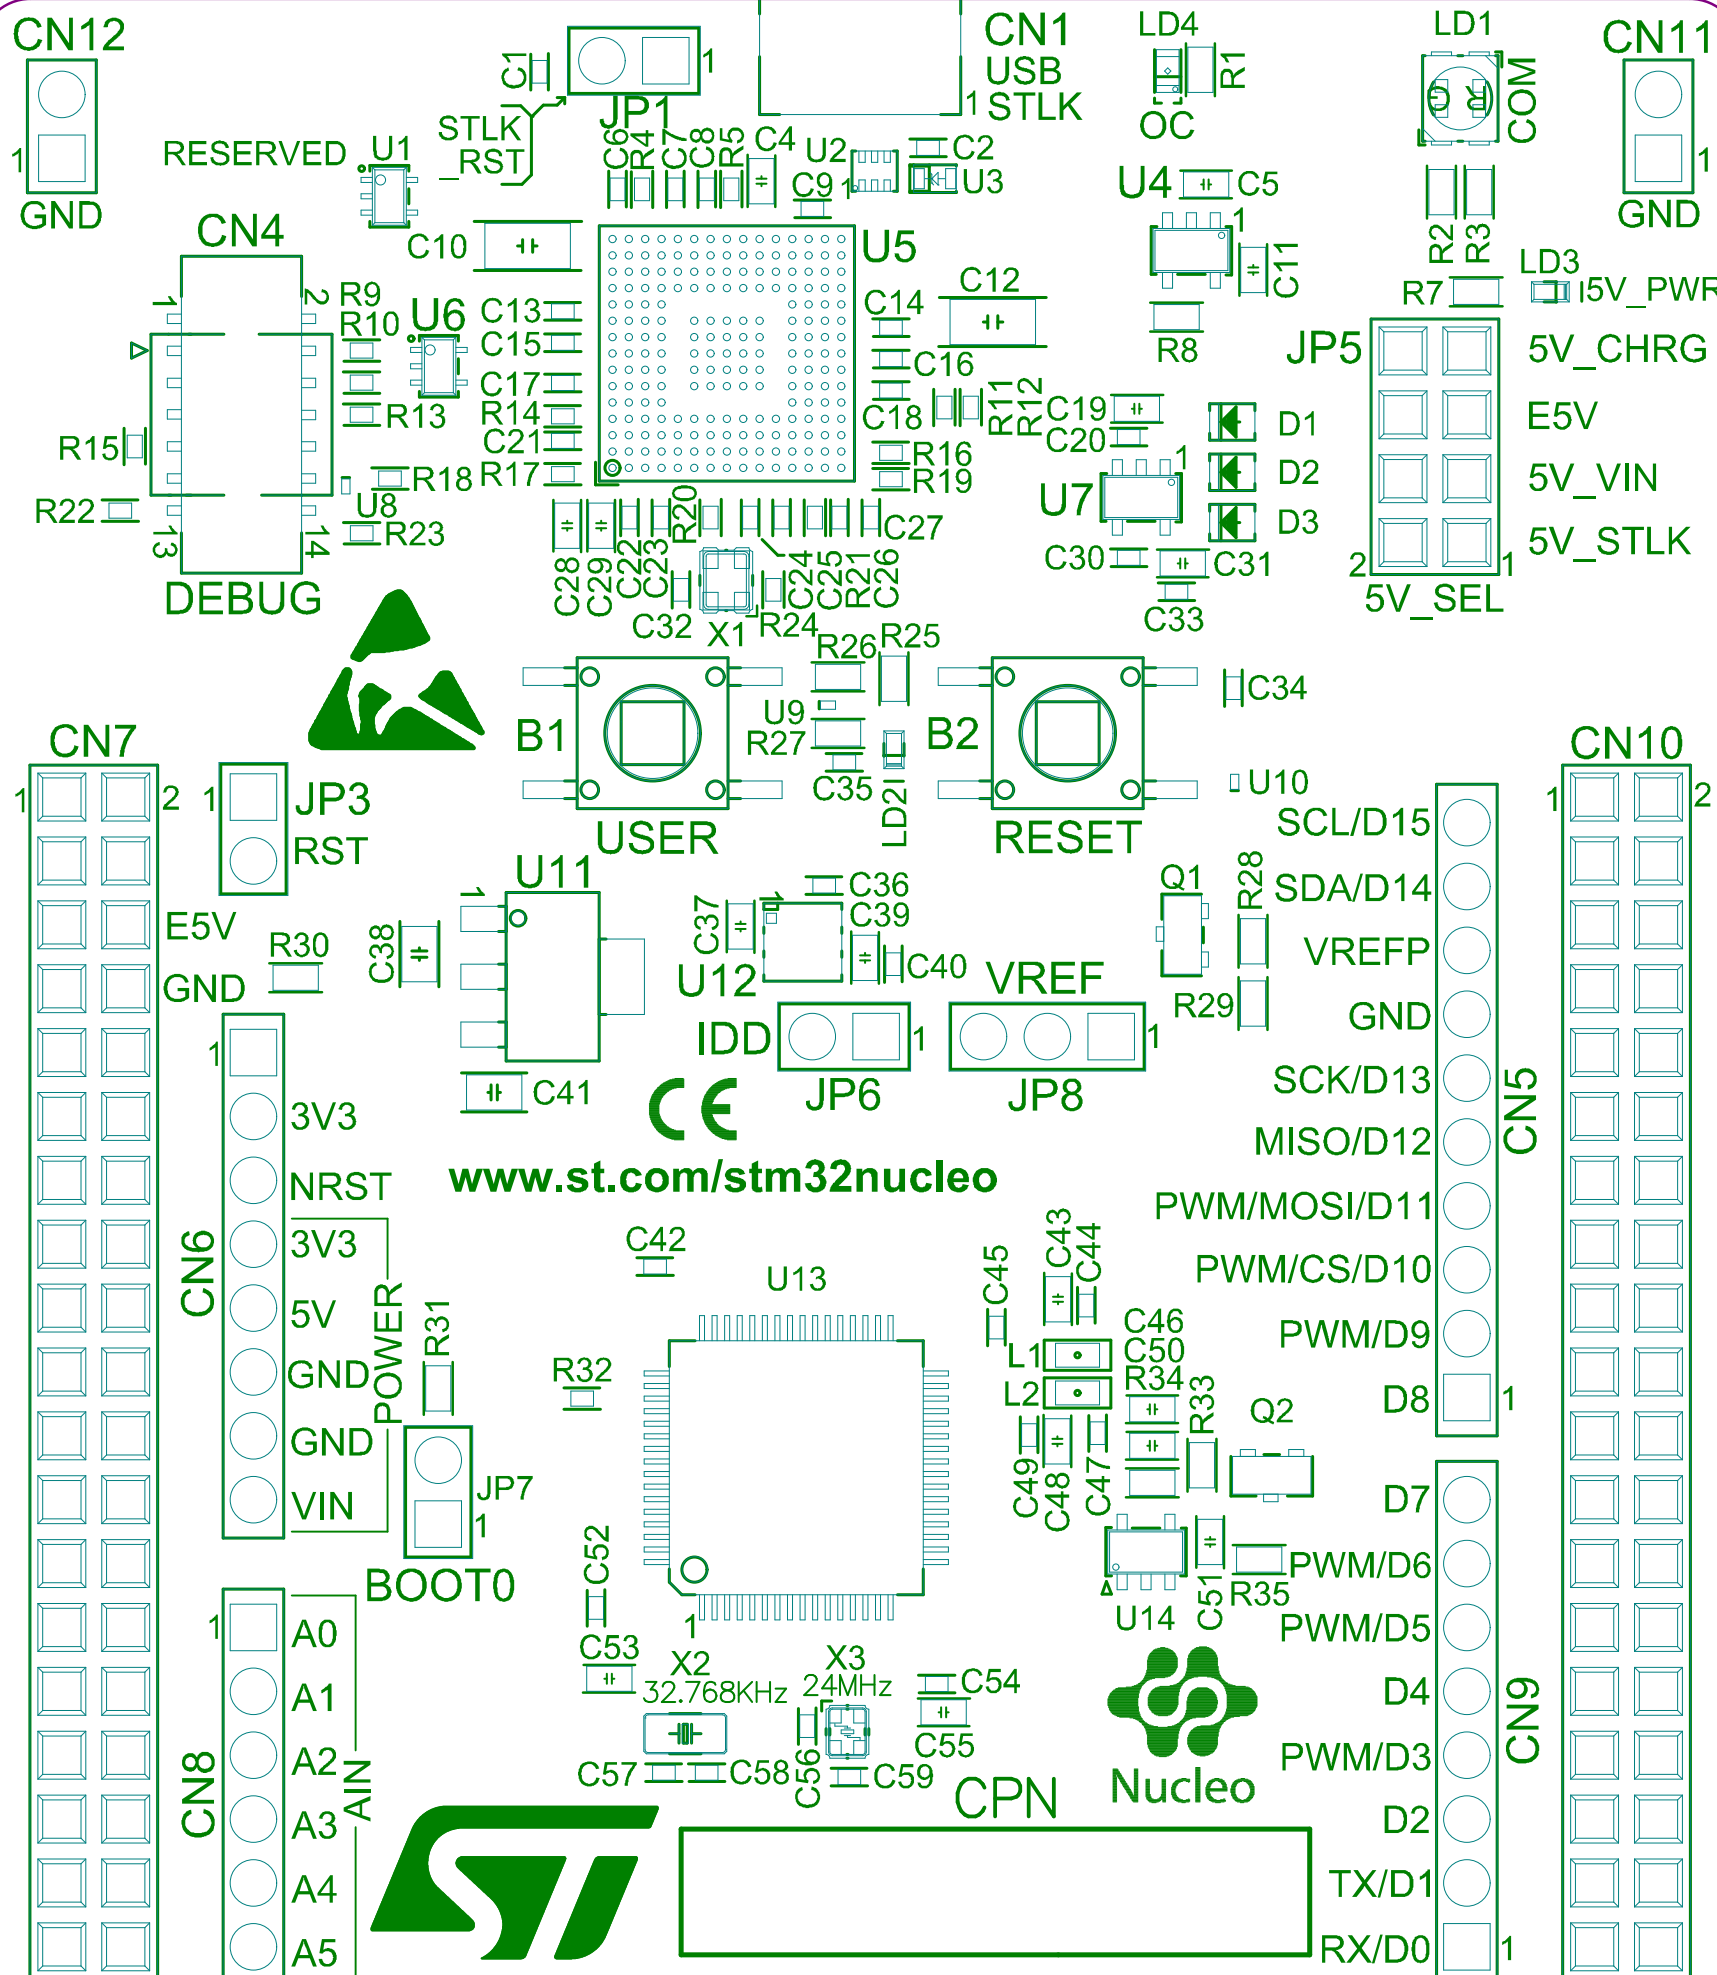

MB1367D

HW103



Nucleo

HW105



