LAP-4 Router configuration in Cisco Packet Tracer PCS and two Switch using POOL

Lab Objectives:

Make student to know how making a network in Packet Tracer using a router.

Lab instructions:

- ✓ Add two Switches (includes number of PC's) and a router.
- ✓ Connect between them using Straight cable.

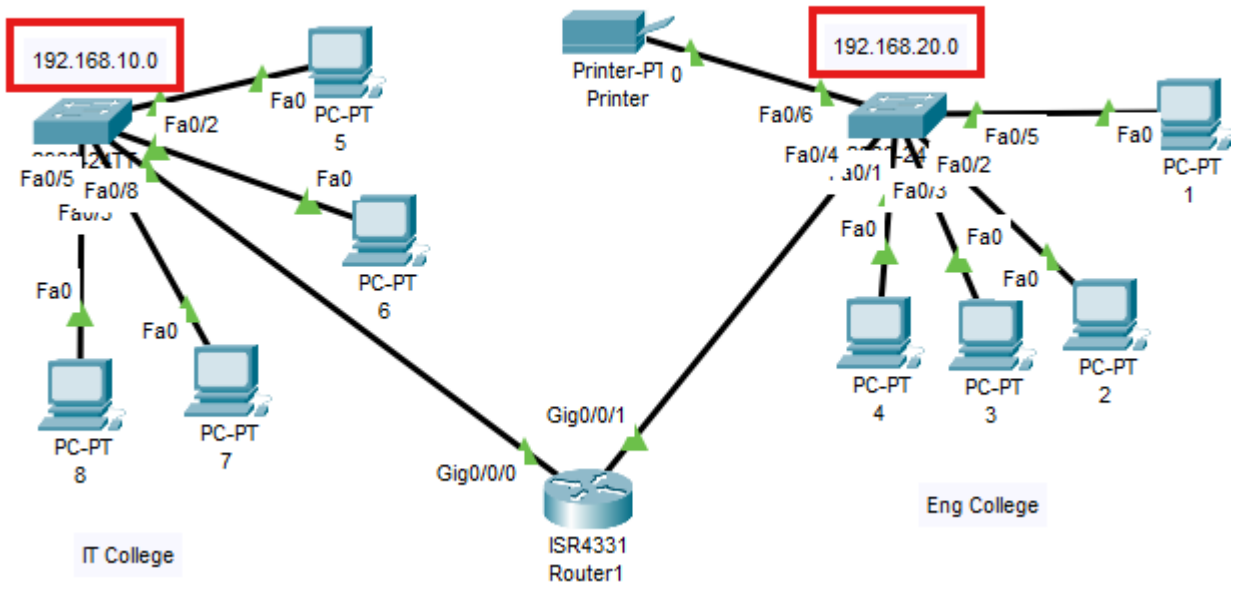

- ✓ Using CLI Add the IP address for each Interfaces as following.

```
interface GigabitEthernet0/0/0
 ip address 192.168.10.1 255.255.255.0

interface GigabitEthernet0/0/1
 ip address 192.168.20.1 255.255.255.0
```

Router#enable
Router#configure terminal
Router(config)#interface gi0/0/0
Router(config-if) # IP address 192.168.10.1 255.255.255.0
Router(config-if) # No shutdown
Exit

Router(config)# ip dhcp pool EmadPOOL
Router(dhcp-config)# network 192.168.10.0 255.255.255.0
Router(dhcp-config)# default-router 192.168.10.1
Exit

Router(config)#interface gi0/0/1
Router(config-if) # IP address 192.168.20.1 255.255.255.0
Router(config-if) # No shutdown
Exit

Router(config)# ip dhcp pool EZZPOOL
Router(dhcp-config)# network 192.168.20.0 255.255.255.0
Router(dhcp-config)# default-router 192.168.20.1

- ✓ Click on any Pc and go to Desktop select DHCP

PC from interface 0/0/0

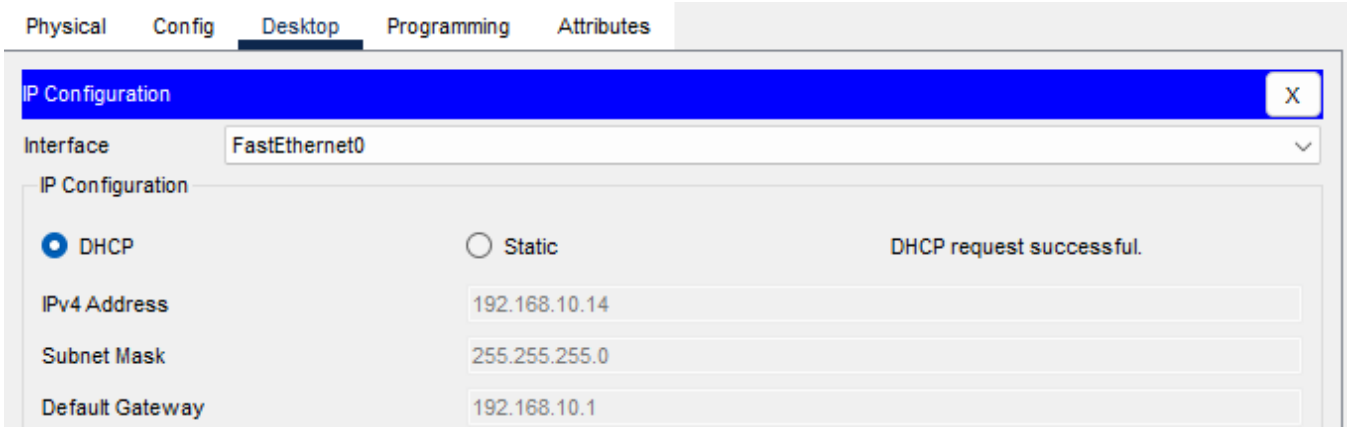
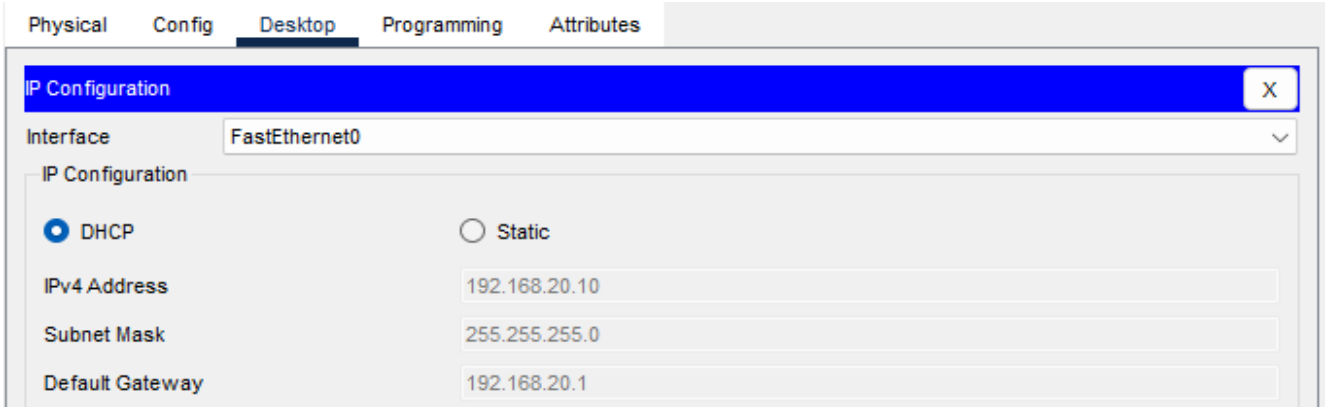
PC from interface 0/0/1