
VIEW A - TRUE VIEW OF THE LINK PLANE (through GH and both joint axes) 1:1

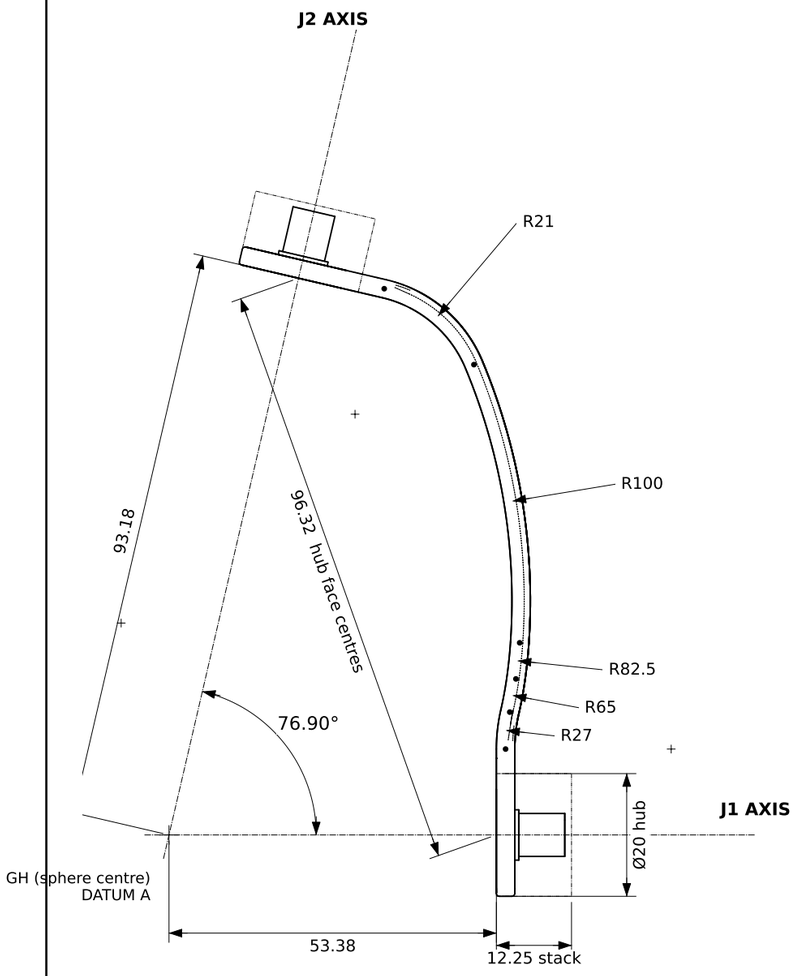

BAR CENTRE-LINE PATH IN VIEW A (from axis J1 to axis J2)
start: on the J1 seat, x = 54.88 (radial), y = 14.0, heading +y

#	type	radius	length	end point (x, y)
1	arc	R 27.0 R	6.08	(55.56, 20.03)
2	arc	R 65.0 L	5.50	(56.56, 25.44)
3	arc	R 82.5 L	5.92	(57.18, 31.32)
4	arc	R 100.0 L	46.37	(49.72, 76.67)
5	arc	R 21.0 L	19.89	(35.09, 89.04)

end: on the J2 seat, 14 from axis J2, at 94.68 radial along J2
(L / R = turning left / right walking from J1 to J2)


KEY DIMENSIONS

angle between axes J1 and J2	76.90 deg
GH to J1 hub skin-side face (along J1)	53.38
GH to J2 hub skin-side face (along J2)	93.18
J1 face centre to J2 face centre	96.32
J1 face centre in view A (x, y)	(53.38, 0.00)
J2 face centre in view A (x, y)	(21.12, 90.75)
hub cylinder (both joints)	Ø20 x 12.25 from the face
bar section	3 (in plane) x 8 (normal to plane)
seat: flat pad, bar leaves it 14 mm from each axis	

THIS LINK IN THE JOINT STACK
lower member at J1 and J2 (pad 0-3 mm above each hub face, integral O7 pins up through the bearings)

NOTES
1. Both joint axes pass through GH (datum A); view A is the plane they span, so every length and angle in it is true.
2. Hub faces are measured from GH along each axis; the hub cylinder (O20 bearing stack) occupies face .. face + 12.25.
3. Phantom rectangles = hub cylinder envelopes; dashed = hidden edges; chain lines = joint axes.
4. Unless noted: edges broken R0.5, pocket 1.0 deep on the outer face with a 1.5 rim (as built).

VIEW B - EDGE VIEW OF THE LINK PLANE (the plane is the horizontal centre line) SCALE 1:1

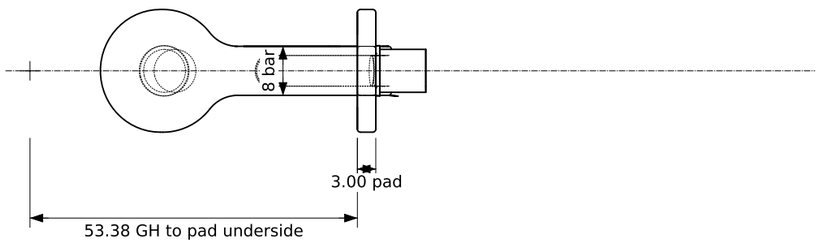

LINK 1 (J1 - J2) D6-02

MATERIAL Ti-6Al-4V, bead blasted	SCALE 1:1 on A3 UNITS mm, deg
exo-shoulder user-style 3R (r20 s1414 #4)	THIRD ANGLE DATE 2026-10-15 REV A