
VIEW A - TRUE VIEW OF THE LINK PLANE (through GH and both joint axes) 1:1

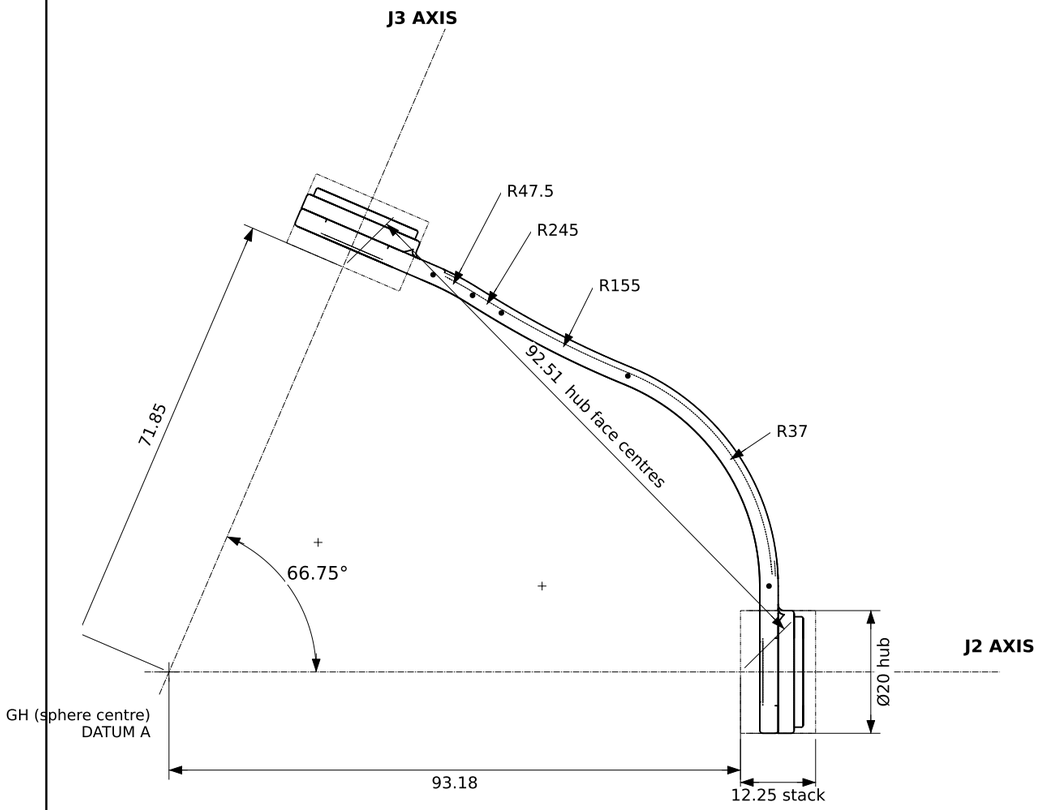

BAR CENTRE-LINE PATH IN VIEW A (from axis J2 to axis J3)
start: on the J2 seat, x = 97.83 (radial), y = 14.0, heading +y

#	type	radius	length	end point (x, y)
1	arc	R 37.0 L	43.78	(74.81, 48.25)
2	arc	R 155.0 R	23.06	(54.19, 58.52)
3	arc	R 245.0 R	5.50	(49.49, 61.39)
4	arc	R 47.5 L	7.27	(43.06, 64.76)

end: on the J3 seat, 14 from axis J3, at 76.50 radial along J3
(L / R = turning left / right walking from J2 to J3)


KEY DIMENSIONS

angle between axes J2 and J3	66.75 deg
GH to J2 hub skin-side face (along J2)	93.18
GH to J3 hub skin-side face (along J3)	71.85
J2 face centre to J3 face centre	92.51
J2 face centre in view A (x, y)	(93.18, 0.00)
J3 face centre in view A (x, y)	(28.36, 66.01)
hub cylinder (both joints)	Ø20 x 12.25 from the face
bar section	3 (in plane) x 8 (normal to plane)
seat: flat pad, bar leaves it 14 mm from each axis	

THIS LINK IN THE JOINT STACK
upper member at J2 and J3 (bearing rings 3.15-12.25 mm above each hub face)

NOTES
1. Both joint axes pass through GH (datum A); view A is the plane they span, so every length and angle in it is true.
2. Hub faces are measured from GH along each axis; the hub cylinder (O20 bearing stack) occupies face .. face + 12.25.
3. Phantom rectangles = hub cylinder envelopes; dashed = hidden edges; chain lines = joint axes.
4. Unless noted: edges broken R0.5, pocket 1.0 deep on the outer face with a 1.5 rim (as built).

VIEW B - EDGE VIEW OF THE LINK PLANE (the plane is the horizontal centre line) SCALE 1:1

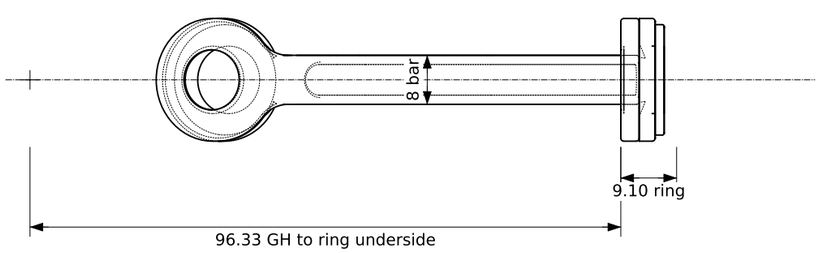

LINK 2 (J2 - J3) D6-03

MATERIAL Ti-6Al-4V, bead blasted	SCALE 1:1 on A3 UNITS mm, deg
exo-shoulder user-style 3R (r20 s1414 #4)	THIRD ANGLE DATE 2026-10-15 REV A