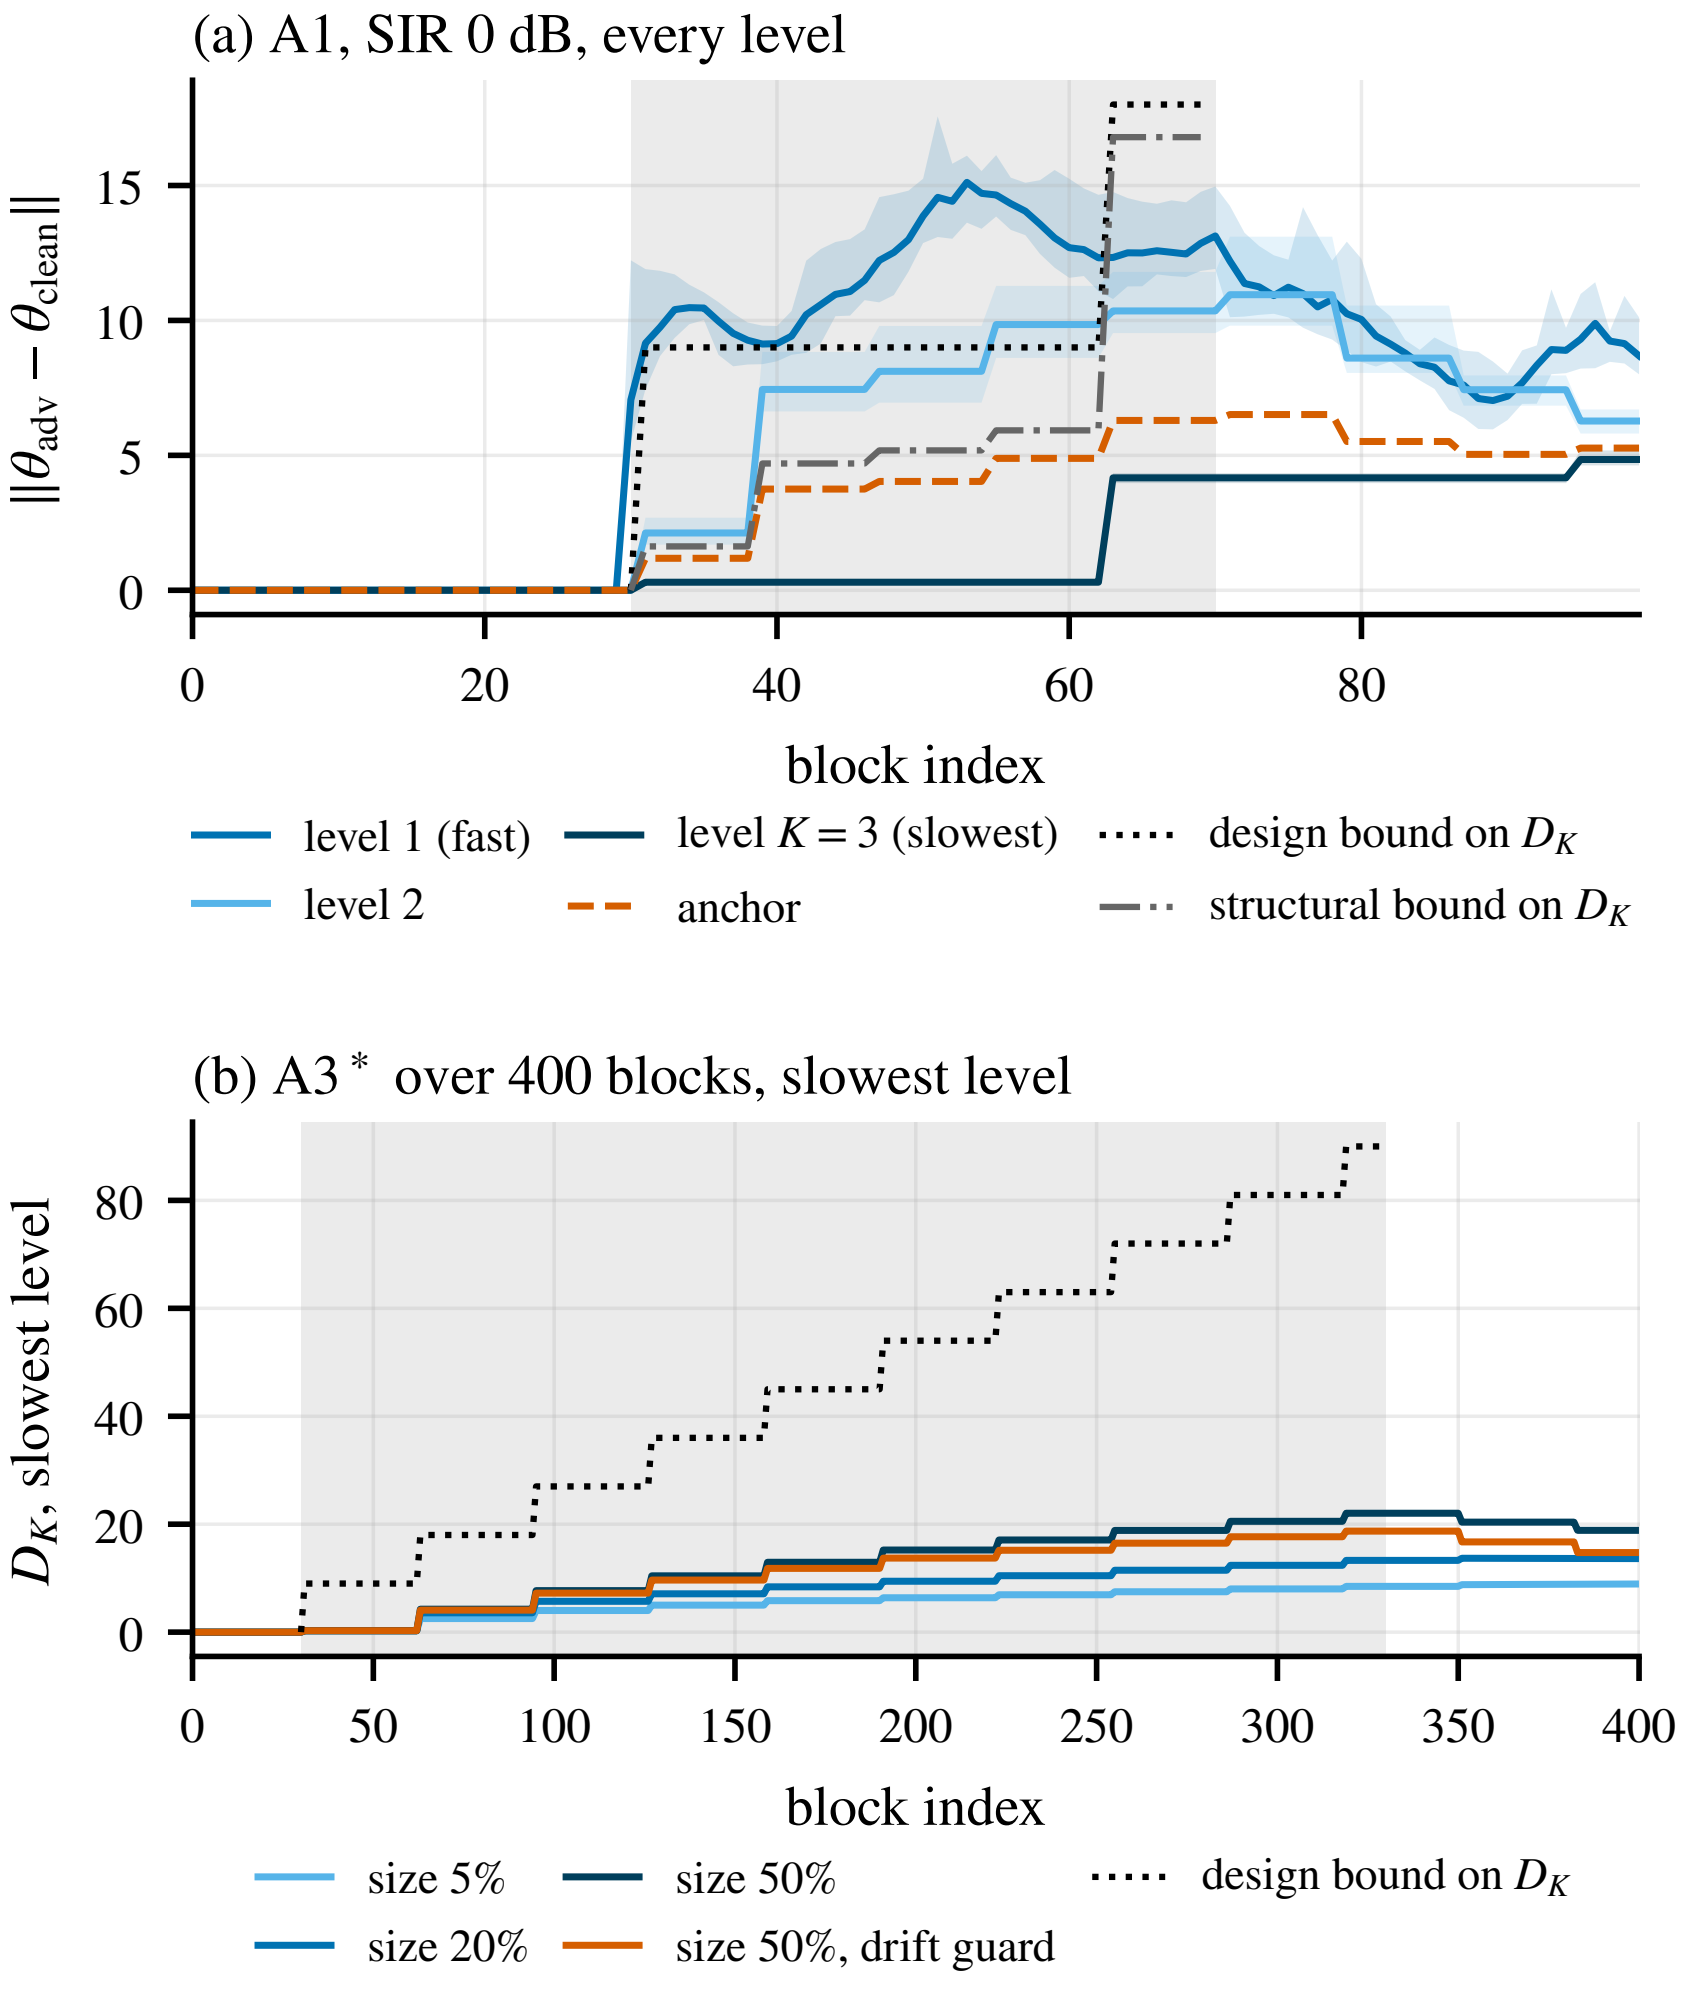
(a) A1, SIR 0 dB, every level
$\|\theta_{adv} - \theta_{clean}\|$
0
5
10
15
0
20
40
60
80
block index
level 1 (fast)
level 2
level $K = 3$ (slowest)
anchor
design bound on D_K
structural bound on D_K
(b) A3 * over 400 blocks, slowest level
D_K, slowest level
0
20
40
60
80
0
50
100
150
200
250
300
350
400
block index
size 5%
size 20%
size 50%
size 50%, drift guard
design bound on D_K