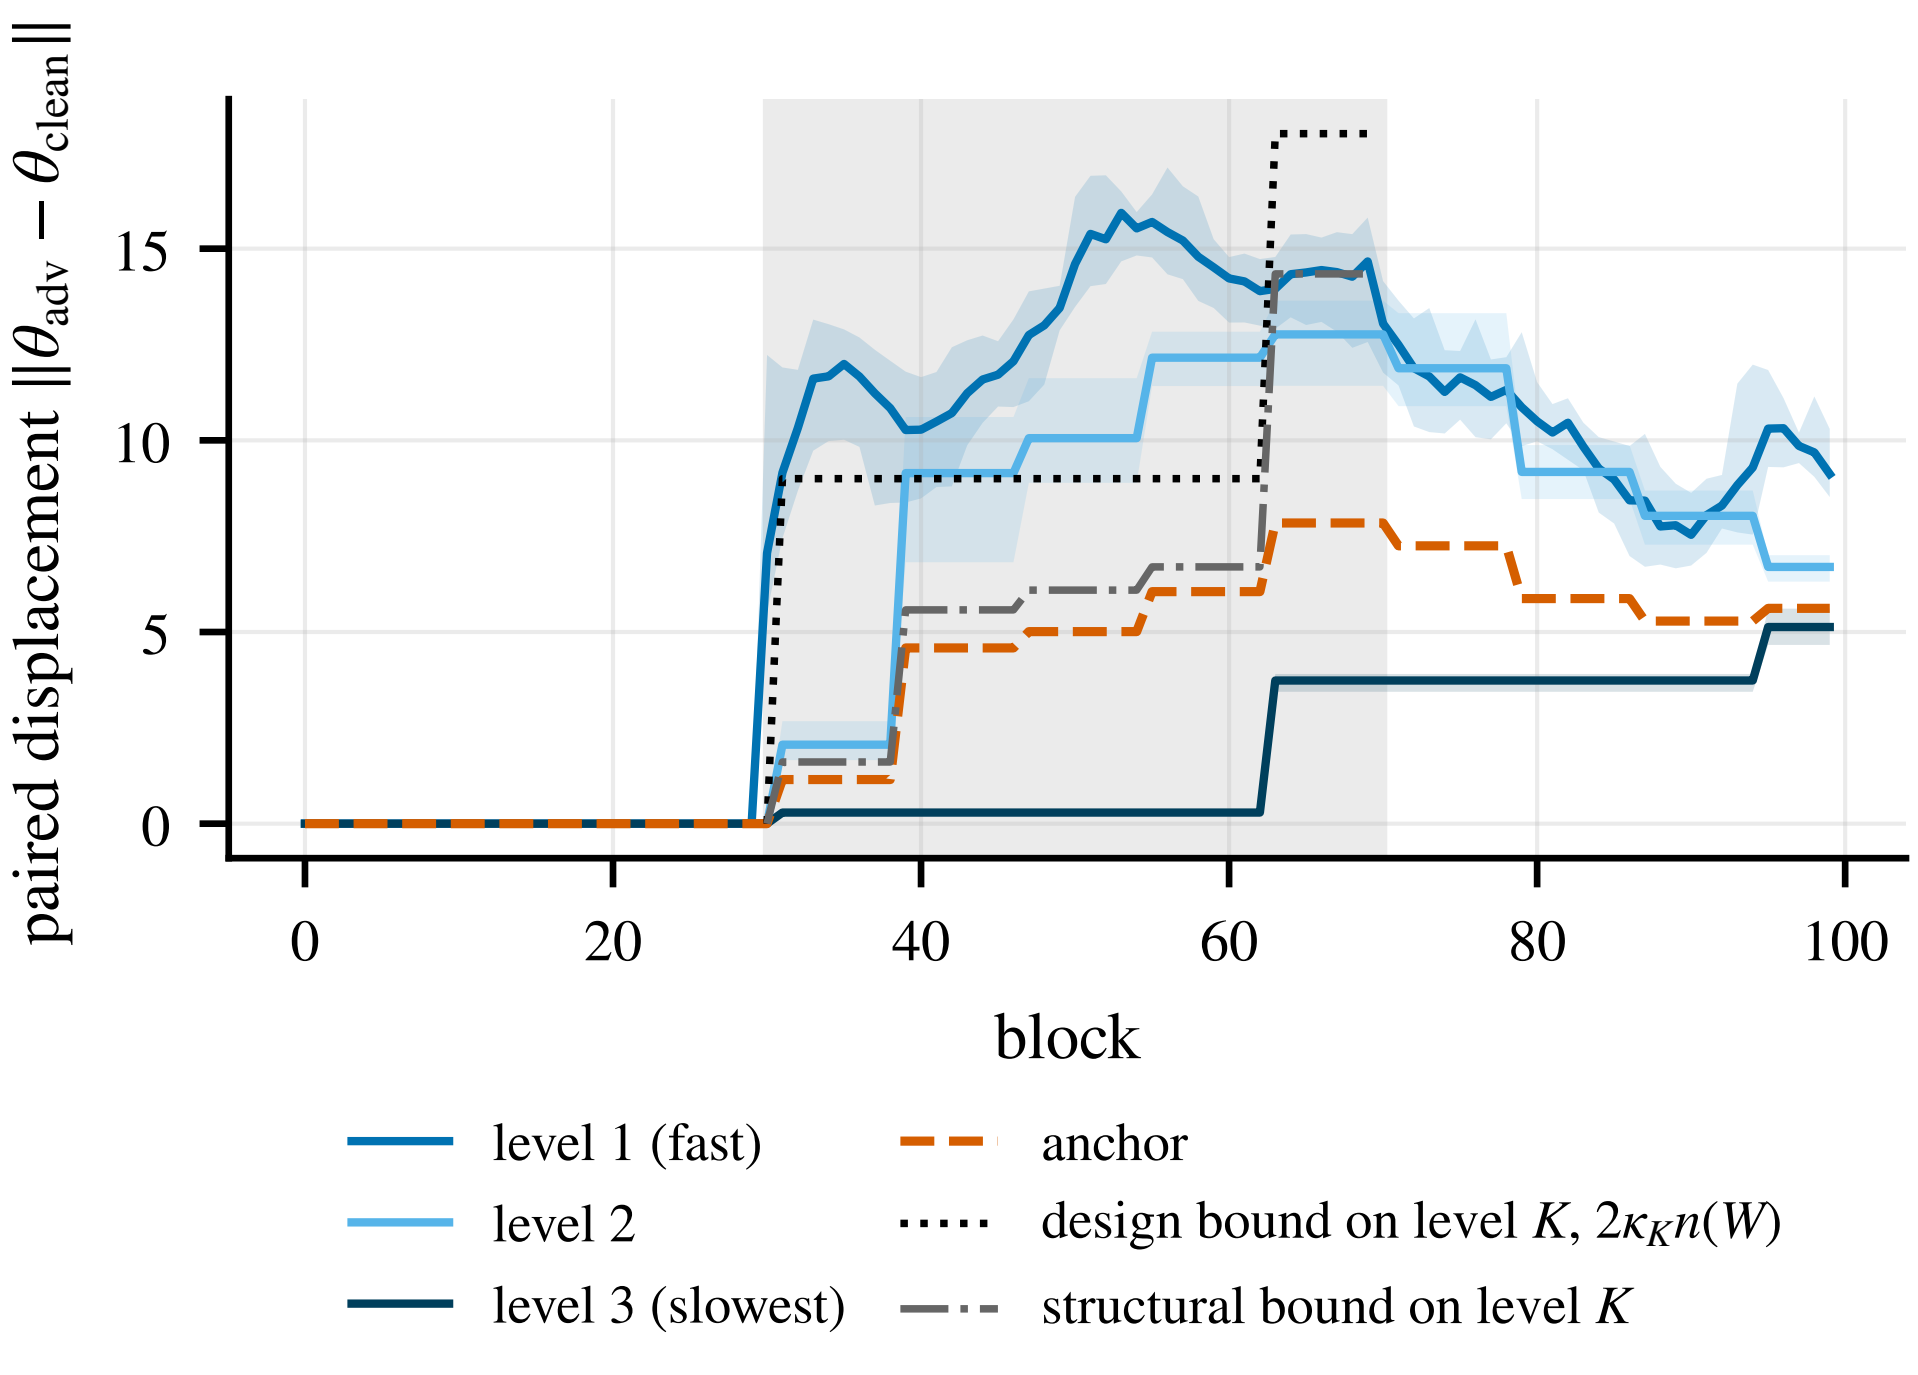
paired displacement $\|\theta_{adv} - \theta_{clean}\|$
0
5
10
15
0
20
40
60
80
100
block
level 1 (fast)
level 2
level 3 (slowest)
anchor
design bound on level K, $2\kappa_K n(W)$
structural bound on level K