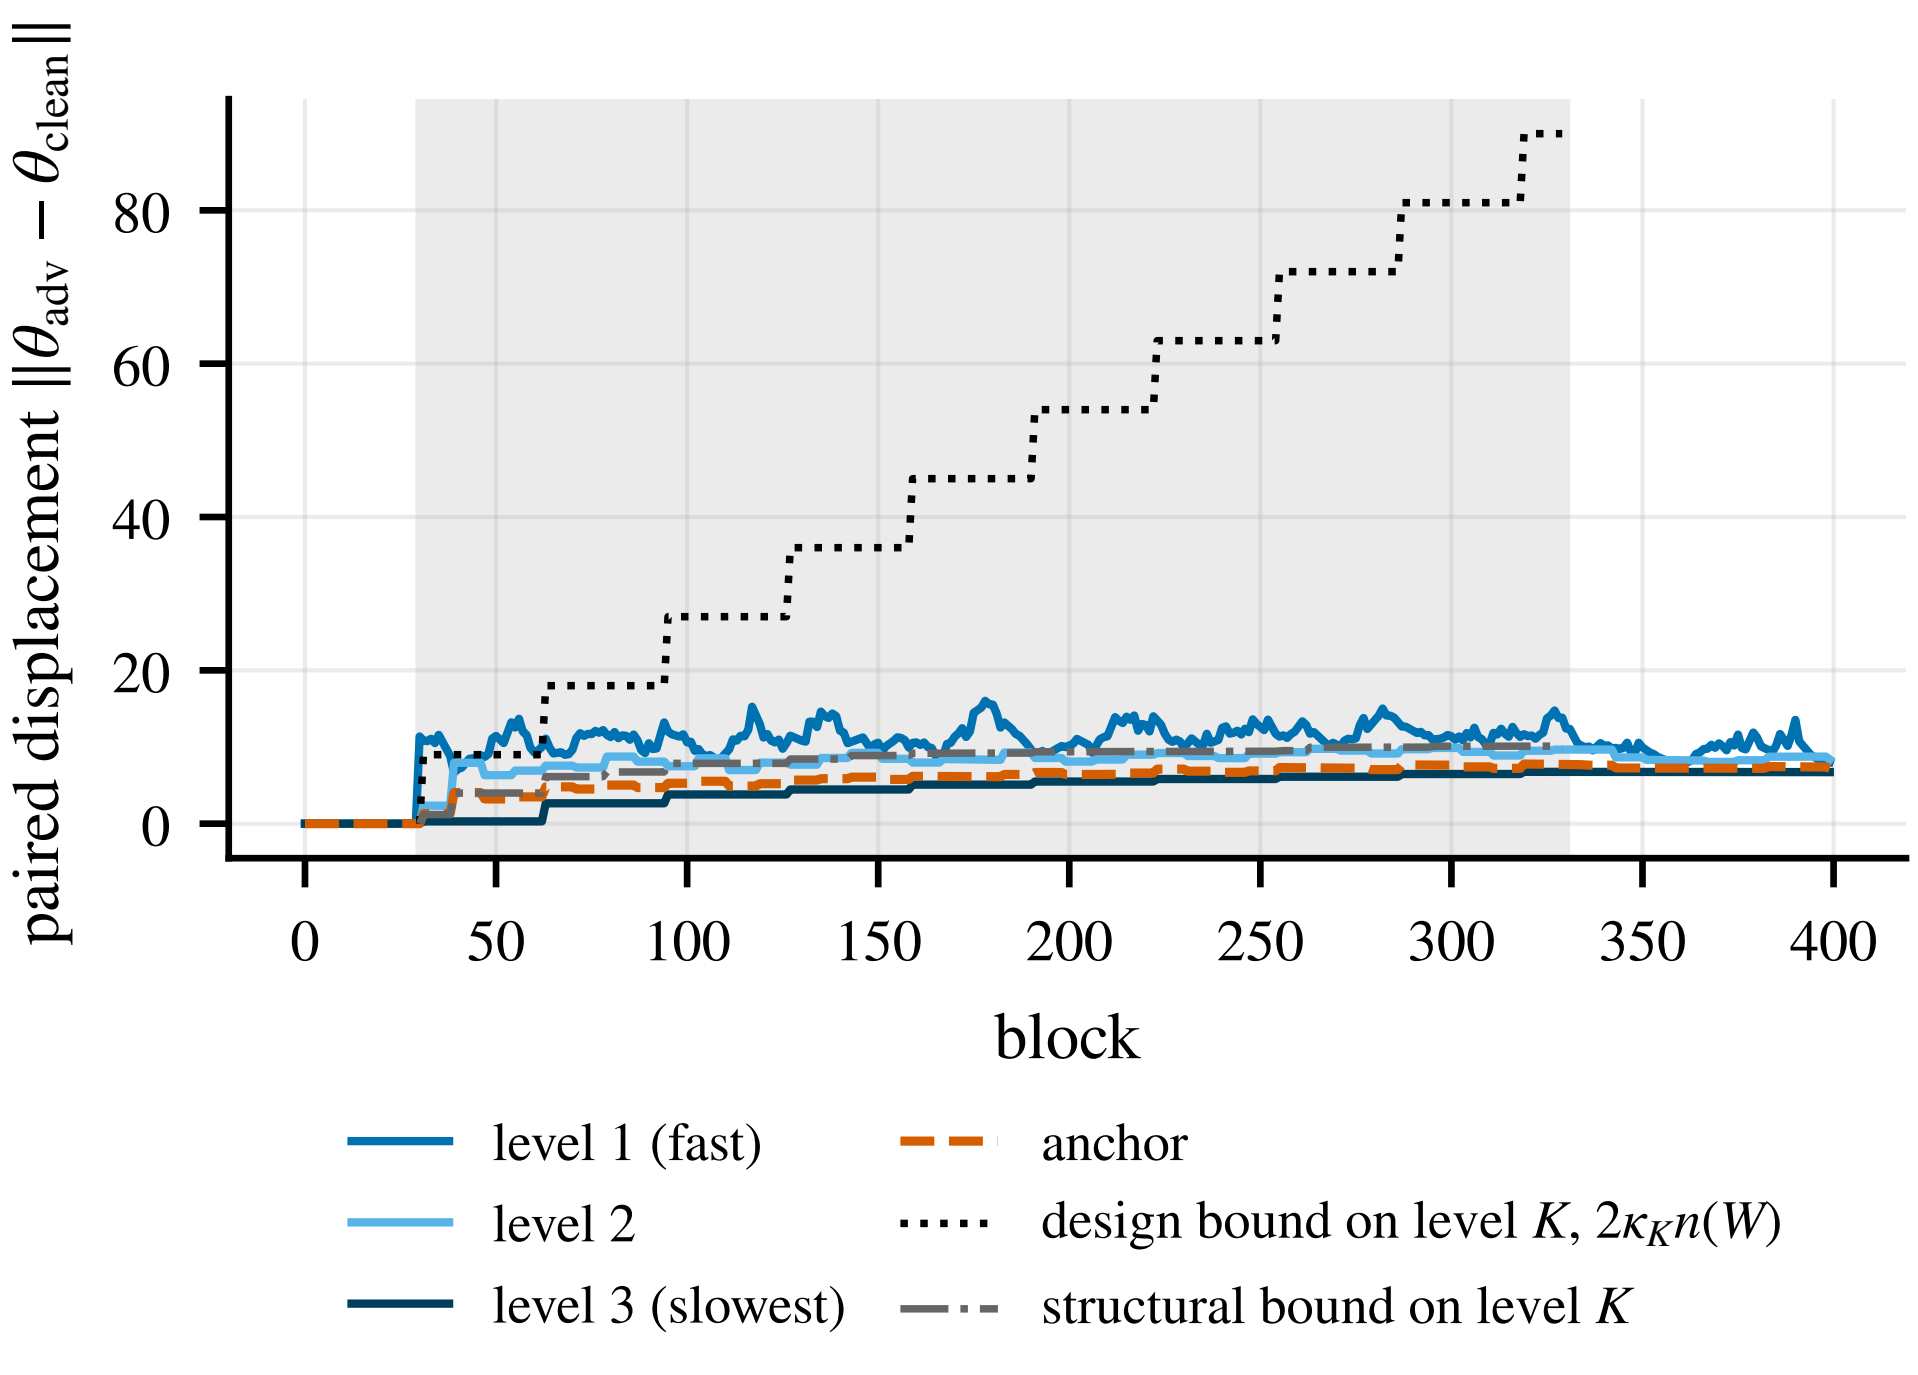
paired displacement $\|\theta_{\text{adv}} - \theta_{\text{clean}}\|$
0
20
40
60
80
0
50
100
150
200
250
300
350
400
block
level 1 (fast)
level 2
level 3 (slowest)
anchor
design bound on level $K$, $2\kappa_K n(W)$
structural bound on level $K$