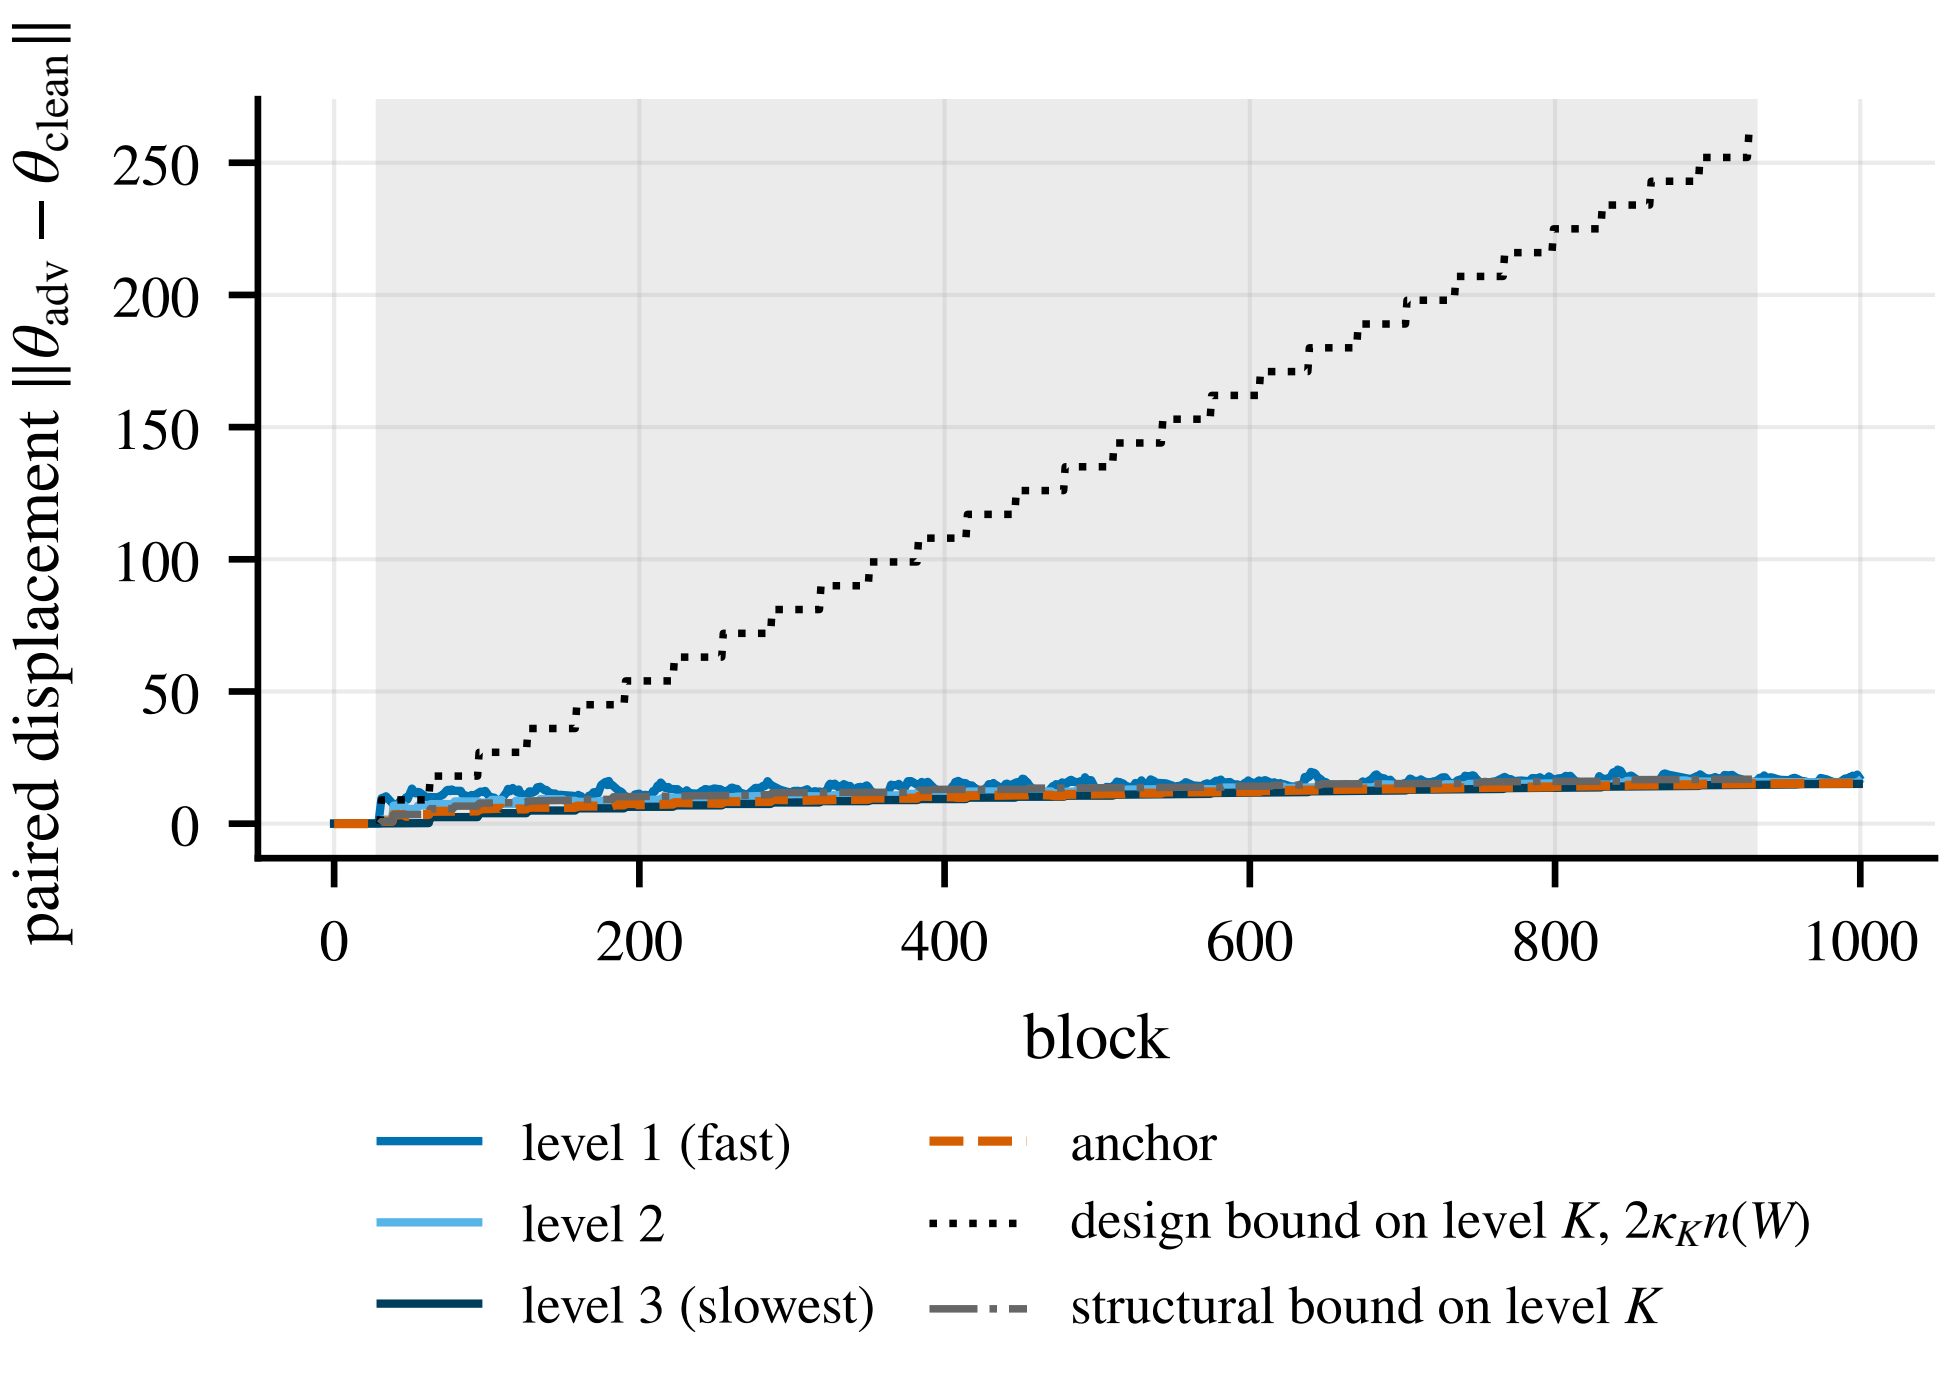

paired displacement $\|\theta_{\text{adv}} - \theta_{\text{clean}}\|$
250
200
150
100
50
0
0
200
400
600
800
1000
block
level 1 (fast)
level 2
level 3 (slowest)
anchor
design bound on level K, $2\kappa_K n(W)$
structural bound on level K