


Name : Abrham Abebe
Section: CS2
Email : abrehamabebe1921@gmail.com

From this assignment, I understood how to use a standard Access Control List (ACL) to control remote access to a Cisco router through VTY lines. I learned that VTY lines are used for remote management, such as Telnet, and that an ACL can restrict which devices are allowed to connect remotely. In this activity, I configured standard ACL number 99 to permit only the PC with the IP address 10.0.0.1. I then applied the ACL to VTY lines 0 through 4 using the `access-class 99 in` command. The laptop could still ping the router, but it was prevented from accessing the router through Telnet. I also learned how to verify the ACL using `show access-lists` and `show running-config`. This assignment helped me understand how ACLs can improve router management security.

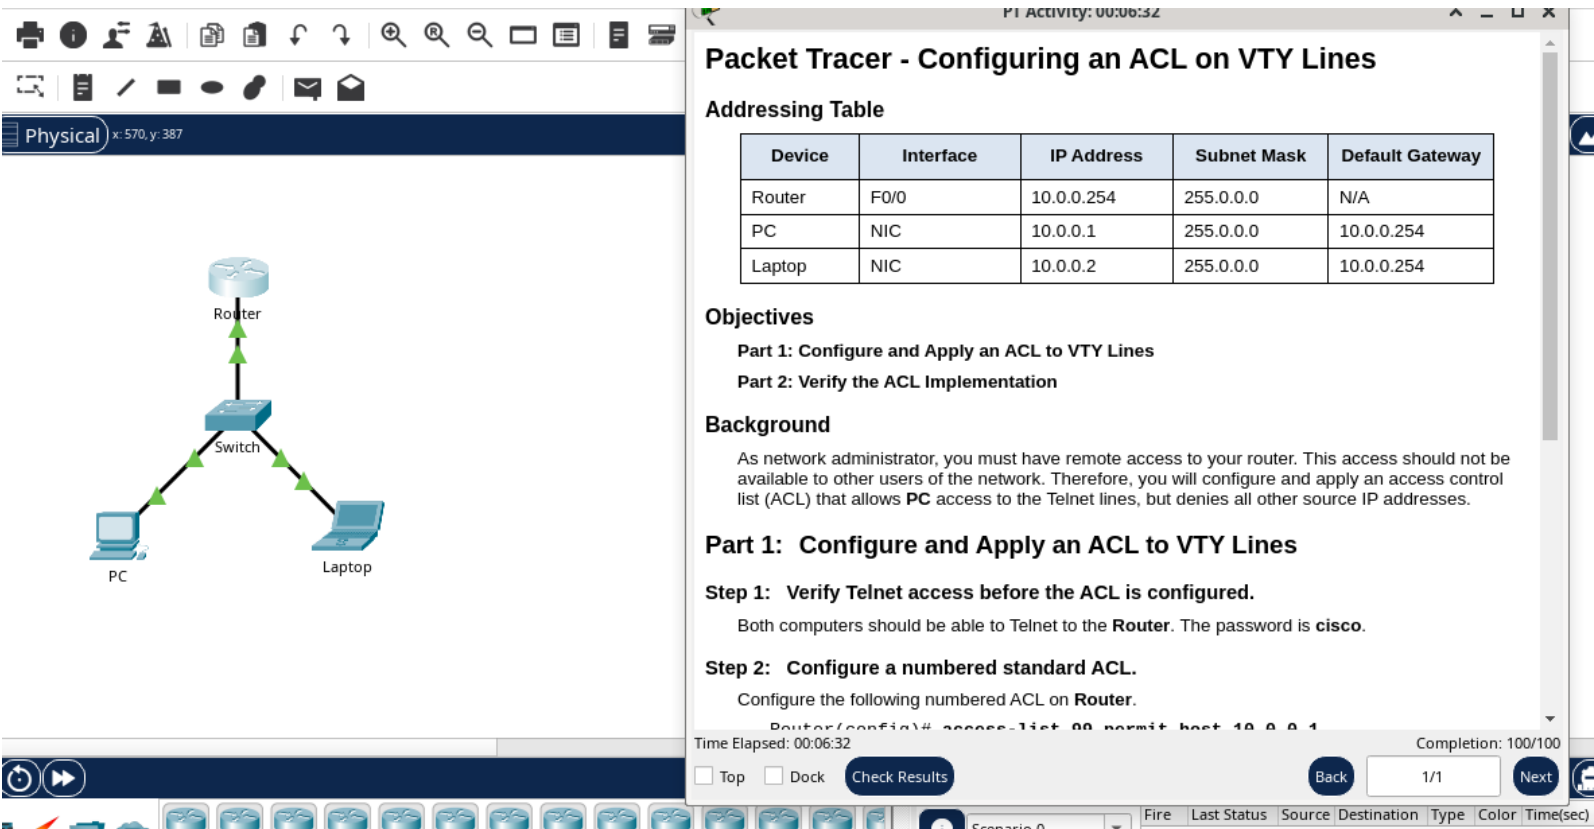

The image shows the Packet Tracer interface. On the left is a network diagram with a Router at the top, connected to a Switch below it. The Switch is connected to a PC on the left and a Laptop on the right. On the right is a configuration window titled "Packet Tracer - Configuring an ACL on VTY Lines".

Addressing Table

Device	Interface	IP Address	Subnet Mask	Default Gateway
Router	F0/0	10.0.0.254	255.0.0.0	N/A
PC	NIC	10.0.0.1	255.0.0.0	10.0.0.254
Laptop	NIC	10.0.0.2	255.0.0.0	10.0.0.254

Objectives

- Part 1: Configure and Apply an ACL to VTY Lines
- Part 2: Verify the ACL Implementation

Background

As network administrator, you must have remote access to your router. This access should not be available to other users of the network. Therefore, you will configure and apply an access control list (ACL) that allows PC access to the Telnet lines, but denies all other source IP addresses.

Part 1: Configure and Apply an ACL to VTY Lines

Step 1: Verify Telnet access before the ACL is configured.

Both computers should be able to Telnet to the Router. The password is **cisco**.

Step 2: Configure a numbered standard ACL.

Configure the following numbered ACL on Router.

```
Router(config)# access-list 99 permit host 10.0.0.1
```

Time Elapsed: 00:06:32

Completion: 100/100

Buttons: Top, Dock, Check Results, Back, 1/1, Next

Scenario 0

Fire, Last Status, Source, Destination, Type, Color, Time(sec)