
Peak live allocation bytes

Native instruction and allocation measurements · run-20261012T0543Z

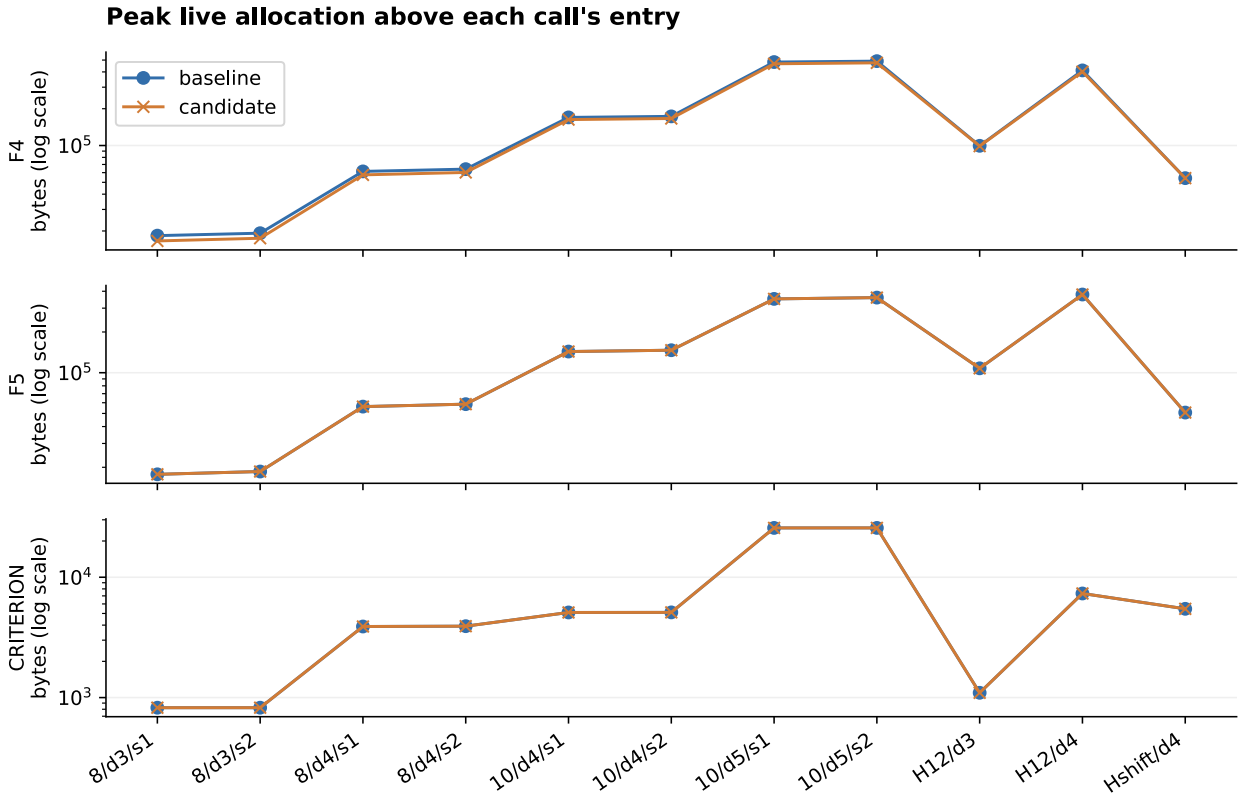

run-20261012T0543Z · Median of 3 native primary calls per system and variant.
H = frozen holdout; Hshift uses bits 52–63 and 6 multiplier variables.
Same-interval peak minus entry; not RSS or cumulative traffic. Source: records/attempt-2-fixed/comparison.json.

Native primary records retain three repetitions per variant, all eleven inputs, live bytes at entry and the absolute live-byte peak. The graph shows native medians of peak minus the entry value over that same allocation interval. Entry records separate retained inputs and warm outputs from the call’s additional peak. No allocation-request, requested-byte, absolute-peak or additional-live-byte regression occurred in primary or paired controls. The complete reduced outputs and retained warm inputs are identical, and the criterion allocation control is unchanged. Process RSS and elapsed runtime were not measured; the host lacks the pressure data needed for controlled timing.

Native sources: final comparison and raw-record hashes, frozen protocol, first rejection, bounded correction, gate scope, fixture repair, report and validation. Raw Callgrind dumps and Rust JSONL remain beside the data. Earlier segment: hashing study. Validation: 3,995 release-library tests passed, zero failed, 112 ignored; complete named coverage verified. The long ignored isogeny test passed separately. 46 Groebner/F4, 18 F5, 21 polynomial, 24 native coordinate and five comparison tests passed; Cargo examples and Clippy passed. Earlier failed/interrupted checks are retained. The inherited fixture-only repair preserves order rejection and strict parsing. Runtime and process RSS remain unmeasured.