

AT530 User Manual

1	AT530 Features	4
1.1	Appearance	4
1.2	Interface	4
1.3	Electricity characteristic	4
1.4	Software	4
1.5	Standard and Protocols	5
1.6	Compliant Standard	5
1.7	Operating requirement	5
1.8	Package	6
1.9	Installation	6
2	Web Configuration	6
2.1	Access Web setting page	6
2.2	Current state	7
2.3	Network	8
2.3.1	Wan Config	8
2.3.2	LAN Config	9
2.4	VoIP SIP Config	10
2.5	Advance	12
2.5.1	DHCP Server	12
2.5.2	NAT	13
2.5.3	Net Service	14
2.5.4	Firewall settings	15
2.5.5	QoS settings	16
2.5.6	Advance SIP settings	17
2.5.7	Digital Map	18
2.5.8	Call Service Settings	20
2.5.9	MMI Filter	22
2.5.10	Audio Settings	22
2.5.11	VPN	23
2.5.12	Memory Key	24
2.6	Dial-Peer	24
2.7	Config Manage	25
2.8	Update	25
2.8.1	Web Update:	25
2.8.2	TFTP/FTP Update:	25
2.8.3	Auto Provisioning:	25
2.9	System Manage	27
2.9.1	Account Manage	27
2.9.2	Phone Book:	27
2.9.3	Syslog Config:	27
2.9.4	Time Set:	28
2.9.5	Reboot:	28
3	Use keypad configure AT530 IP phone	29
3.1	Keypad function	29
3.2	Keypad Menu	30
4	Telnet Console	32
4.1	Introduce	32
4.2	Global Command	33
5	Tree Structure	34

6	Network Diagnosis	40
7	Restore to factory default.....	41
8	POST Mode(safe mode)	42
9	FAQ.....	43
	9.1.1 How many servers may AT530 register simultaneously?	43
	9.1.2 Why the settings vanish after reboot?	43
	9.1.3 How to use the dial rule?	43
	9.1.4 How to use speed dial function?	44
	9.1.5 How to configure digital map?	44
	9.1.6 How to use Call Forward, Call Transfer and 3-way Conference calls?	44
	9.1.7 How to use the record function?	45
	9.1.8 How to use set the IP type via keypad?	46
	9.1.9 VLAN implement	46
	9.1.10 How to connect RJ9 headset to AT-530	49

1 AT530 Features

1.1 Appearance



1.2 Interface



Power: Output Power:12VDC,500mA.

WAN: RJ45 port.

LAN: RJ45 port.

1.3 Electricity characteristic

- **Speciality of electric:** output the 12V 500mA DC
- **The network connects:**2 RJ45 connect, a WAN, a LAN

1.4 Software

- Support two sip accounts at the same time.
- Redundancies server support.
- NAT, Firewall.
- DHCP client and server.
- Support PPPoE, (used for ADSL, cable modem connecting).
- Support major G7.xxx CODEC.
- VAD,CNG.

- G.168 compliant 32ms echo cancellation
- Tone generation and Local DTMF re-generation according with ITU-T
- E.164 dial plan and customized dial rules
- Hotline.
- Speed Dial
- Call Forward, Call Transfer, 3-way conference calls
- Record
- Caller ID display
- DND(Do Not Disturb),Black List,Limit List
- Upgrade firmware through FTP, TFTP or HTTP,.
- Web management.
- Telnet remote management.
- adjustable user password and super password

1.5 Standard and Protocols

- IEEE 802.3 /802.3 u 10 Base T / 100Base TX
- PPPoE: PPP Protocol over Ethernet
- DHCP Client and Server: Dynamic Host Configuration Protocol
- G.711 u/a; G729, G7231 5.3/6.3 audio Codec
- SIP RFC3261, RFC 2543
- IAX2
- TCP/IP: Internet transfer and control protocol
- RTP: Real-time Transport Protocol
- RTCP: Real-time Control Protocol
- VAD/CNG save bandwidth
- Telnet: Internet's remote login protocol
- DNS: Domain Name Server
- TFTP: Trivial File Transfer Protocol
- HTTP: Hyper Text Transfer protocol
- FTP: File Transfer protocol

1.6 Compliant Standard

- CE: EN55024,EN55022
- FCC part15
- comply with ROHS in EU
- comply with ROHS in China



Explanation:

The letter “e” is the first letter of “environment: and “electronic”, The rim is a round with two arrow , stands for recycle. The number 20 stands for the years of environment protection. Please note the years of environment protection is not discarding year nor usage life

1.7 Operating requirement

- Operation temperature: 0 to 40° C (32° to 104° F)
- Storage temperature: -30° to 65° C (-22° to 149° F)
- Humidity: 10 to 90% no dew


1.8 Package

- Size: 338x220x85mm
- Packing List
 - ✓ AT530 IP phone
 - ✓ Power adaptor (out put 12v ,500mA)
 - ✓ Manual CD

1.9 Installation

Use ethernet cable to connect AT530's LAN port and your computer. Set your computer's ip to the network 192.168.10.x or using dynamic obtain IP. Open your web browser and key in 192.168.10.1. Then you will see the logon page of AT530, the default username and password is admin/admin for administrator and guest/guest for guest.

Set up page for VoIP use only:

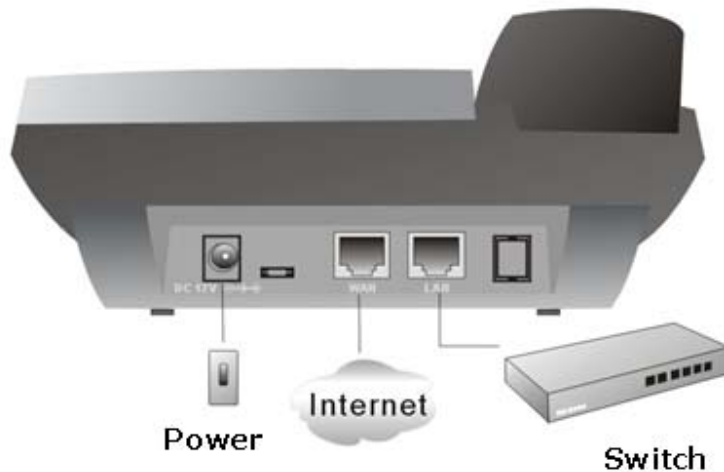

2 Web Configuration

2.1 Access Web setting page

Enter AT530 IP address in the web browser and press ENTER to go to the log on page, and key in the username and password to access AT530 setting page.

Default username and password is:

Administrator:	Username: admin	password: admin
User:	Username: guest	Username: guest

2.2 Current state

IP Phone

Running Status

Network

WAN	Connect Mode	Static	MAC Address	00:09:45:52:a1:c8
	IP Address	192.168.1.32	Gateway	192.168.1.254
LAN	IP Address	192.168.10.1	DHCP Server	ON

VoIP

Default Protocol: SIP

SIP	Register Server	59.188.21.238	Proxy Server	59.188.21.238
	Register	ON	State	Registered
	SIP Stun	OFF		
IAX2	IAX2 server		Register	OFF
	State	Unregistered		

Phone Number

Public SIP	111
Private SIP	
IAX2	

Version: VOIP PHONE v1.0 Nov 16 2006 17:26:52

This page shows AT530's running state.

Network shows the WAN and LAN port connecting state and current settings.

VoIP part show the working state of VoIP, you can see whether AT530 has registered the public sip server

Phone Number public sip and private sip phone numbers.

2.3 Network

2.3.1 Wan Config

WAN Configuration

Active IP	Current Netmask	MAC Address	Current Gateway
192.168.1.35	255.255.255.0	00:01:02:03:04:05	192.168.1.1

Mac Authenticating Code

☐ VLAN Enable

☐ Static
☒ DHCP
☐ PPPoE

Static	IP Address	<input style="width: 100px;" type="text" value="192.168.1.179"/>	Netmask	<input style="width: 100px;" type="text" value="255.255.255.0"/>
	Gateway	<input style="width: 100px;" type="text" value="192.168.1.1"/>		
DHCP	Primary DNS	<input style="width: 100px;" type="text" value="202.96.134.133"/>	Alternate DNS	<input style="width: 100px;" type="text" value="202.96.128.68"/>
	DNS Domain	<input style="width: 100px;" type="text"/>	Auto DNS	<input type="checkbox"/>

PPPoE Server	<input style="width: 150px;" type="text" value="ANY"/>
Username	<input style="width: 150px;" type="text" value="user123"/>
Password	<input style="width: 150px;" type="password" value="*****"/>
Fixed IP	<input style="width: 150px;" type="text"/>

WAN port network setting page.

Support static IP, dynamic obtain IP and PPPoE.

VLAN Enable: Enable Vlan

➤ **Configure Static IP:**

----Enable *Static*;

----Set AT530's IP address in the *IP Address*;

----Set netmask in the *Netmask* field;

----Set router IP address in the *Gateway*;

----DNS Domain:

----Set local DNS server in the *Preferred DNS* and the *Alternate DNS*

----Auto DNS: DNS select it to get the DNS address automatically

➤ **Configure to dynamic obtain IP**

----Enable *DHCP*;

If there is DHCP server in your local network, AT530 will automatically obtain WAN port network information from your DHCP server.

➤ **Configure PPPoE:**

----Enable *PPPoE*

----*PPPoE server*: Enter "ANY" if no specified from your ITSP.

----Enter PPPoE username and pin in the *username* and *password*.

----Fixed IP: use the fixed IP address

AT530 will automatically obtain WAN port network information from your ITSP if PPPoE

setting and the setup are correct.

Notice: If user accesses the IP phone through WAN port. He/She should use the new IP address to access the IP phone when the WAN port address was changed.

2.3.2 LAN Config

The screenshot shows the 'IP Phone' web interface with the 'LAN Configuration' tab selected. The interface includes a 'Bridge Mode' checkbox, an 'IP' address field (192.168.10.1), a 'Netmask' field (255.255.255.0), a 'DHCP Service' checkbox, and a 'NAT' checkbox. A note at the bottom states: 'If you modify Bridge Mode, Ip or Netmask, the device will auto save and reboot!'.

IP Phone	
LAN Configuration	
<input type="checkbox"/> Bridge Mode	
IP 192.168.10.1	Netmask 255.255.255.0
<input checked="" type="checkbox"/> DHCP Service	<input checked="" type="checkbox"/> NAT
If you modify Bridge Mode, Ip or Netmask, the device will auto save and reboot !	

Bridge Mode: Enable this option to switch to bridge mode. IP phone won't assign IP for its LAN port in bridge mode and its LAN and WAN port will be in the same network. (This setting won't take effect unless you save the config and reboot the device)

IP Netmask: Set the IP and Netmask for the LAN

DHCP Server: Enable DHCP service in LAN port

NAT: Enable NAT.

2.4 VoIP SIP Config

2.4.1 SIP config

IP Phone

SIP[Registered] Configuration

Register Server Addr	<input type="text" value="192.168.1.230"/>	Proxy Server Addr	<input type="text"/>
Register Server Port	<input type="text" value="5060"/>	Proxy Server Port	<input type="text"/>
Register Username	<input type="text" value="7888"/>	Proxy Username	<input type="text"/>
Register Password	<input type="password" value="****"/>	Proxy Password	<input type="password"/>
Domain Realm	<input type="text"/>	Local SIP Port	<input type="text" value="5060"/>
Phone Number	<input type="text" value="7888"/>	Register Expire Time	<input type="text" value="60"/> seconds
Display Name	<input type="text" value="7888"/>	User Agent	<input type="text" value="Voip Phone 1.0"/>
Encrypt Key	<input type="text"/>	Server Type	<input type="text" value="common"/>
DTMF Mode	<input type="text" value="DTMF_RELAY"/>	RFC Protocol Edition	<input type="text" value="RFC3261"/>
Detect Interval Time	<input type="text" value="60"/> seconds	Transport Protocol	<input type="text" value="UDP"/>
<input checked="" type="checkbox"/> Enable Register			

Setting page of public SIP server:

- Register Server Addr:** Register address of public SIP server
- Register Server Port:** Register port of public SIP server, default port is 5060
- Register Username:** Username of your SIP account (Always the same as the phone number)
- Register Password:** Password of your SIP account.
- Proxy Server Addr:** IP address of proxy SIP server (SIP provider always use the same IP for register server and proxy server, in this case you don't need to configure the proxy server information.)
- Proxy Server Port:** Signal port of SIP proxy
- Proxy Username:** proxy server username
- Proxy Password:** proxy server password
- Domain Realm:** SIP domain, enter the sip domain if any, otherwise AT530 will use the proxy server address as sip domain.
- Local SIP port:** Local SIP register port, default 5060
- Phone Number:** Phone number of your SIP account
- Display name:** config the display name , it can be displayed at the callee's side . only letter and number input is allowed here
- Register Expire Time:** register expire time, default is 600 seconds. AT530 will auto configure this expire time to the server recommended setting if it is different from the SIP server.
- Detect Interval Time:** Co-work with the *Auto Detect Server*, if *Auto Detect Server* is enable, AT530 will periodically detect if the SIP server is available according this setting.
- User Agent:**
- Encrypt Key:** The particular service system decrypts of the key , matching with the server Type usage, the key provide by the particular service system supplier, default is empty

Server Type: The particular service system supplier carries out the sign and speeches to encrypt, default is common

DTMF Mode: DTMF signal sending mode: support RFC2833, DTMF_RELAY (inband audio) and SIP info

RFC Protocol Edition: Current AT530 SIP version. Set to RFC 2543 if the gate need to communicate to devices (such as CISCO5300) using the SIP 1.0. Default is RFC 3261.

Enable Register: Enable/Disable SIP register. AT530 won't sent register info to SIP server if disable register.

Transport Protocol: config the transfer protocol, TCP or UDP.

2.4.2 Iax2 Config

IP Phone

IAX[Registered] Configuration

IAX Server Addr	<input type="text" value="59.188.21.238"/>
IAX Server Port	<input type="text" value="4569"/>
Account Name	<input type="text" value="222"/>
Account Password	<input type="password" value="..."/>
Phone Number	<input type="text" value="222"/>
Local Port	<input type="text" value="4569"/>
Voice mail number	<input type="text" value="0"/>
Voice mail text	<input type="text" value="mail"/>
Echo Test number	<input type="text" value="1"/>
Echo Test text	<input type="text" value="echo"/>
Refresh Time	<input type="text" value="60"/> Seconds
<input checked="" type="checkbox"/> Enable Register	<input type="checkbox"/> Enable G.729
<input checked="" type="checkbox"/> IAX(Default Protocol)	

Setting page of public IAX server:

IAX Server Addr: Register address of public IAX server

IAX Server Port: Register port of public IAX server, default port is 4569

Account Name: Username of your SIP account (Always the same as the phone number)

Account Password: Password of your IAX account.

Local port: Signal port of local, default port is 4569

Phone Number: Phone number of your IAX account

Voice mail number: If the IAX support voice mail, but your username of the voice mail is letters which you can not input with the ATA, then you use the number to stand for your username

Voice mail text: if IAX support voice mail, config the domain name of your mail box here.

Echo test number: If the platform support echo test, and the number is test form, the config the test number to replace the text format The echo test is to test the working status of terminals and platform

Echo test text: echo test number in text format

Refresh time: IAX refresh time

Enable Register: enable or disable register

IAX(Default Protocol): Set IAX 2 as the default protocol , if not the system will choose SIP as default

Enable G.729: Using G.729 speech coding mandatory consultations

2.5 Advance

2.5.1 DHCP Server

DHCP Service

☒ DNS Relay

Name	Start IP	End IP	Lease Time	Netmask	Gateway	DNS
lan2005	192.168.10.2	192.168.10.50	1440	255.255.255.0	192.168.10.1	192.168.10.1

Lease Table Name	<input type="text"/>	Lease Time	<input type="text"/> minute	<input type="button" value="Add"/> <input type="button" value="Delete"/>
Start IP	<input type="text"/>	End IP	<input type="text"/>	
Netmask	<input type="text"/>	Gateway	<input type="text"/>	
DNS	<input type="text"/>			
Lease Table Name	lan2005 ▼			

DHCP server manage page.

User may trace and modify DHCP server information in this page.

DNS Relay: enable DNS relay function.

User may use below setting to add a new lease table.

Lease Table Name: Lease table name.

Lease Time: DHCP server lease time.

Start IP: Start IP of lease table.

End IP: End IP of lease table. Network device connecting to the AT530 LAN port can dynamic obtain the IP in the range between start IP and end IP.

Netmask: Netmask of lease table.

Gateway: Default gateway of lease table

DNS: default DNS server of lease table.

Notice: This setting won't take effect unless you save the config and reboot the device

2.5.2 NAT

IP Phone

NAT Configuration

<input checked="" type="checkbox"/> IPsec ALG	<input checked="" type="checkbox"/> FTP ALG
<input checked="" type="checkbox"/> PPTP ALG	

Inside IP	Inside TCP Port	Outside TCP Port
Inside IP	Inside UDP Port	Outside UDP Port

Transfer Type	TCP ▼	Outside Port	<input style="width: 90%;" type="text"/>
Inside Ip	<input style="width: 90%;" type="text"/>	Inside Port	<input style="width: 90%;" type="text"/>

DMZ Table

Outside IP		Inside IP	
Outside IP	<input style="width: 90%;" type="text"/>	Inside IP	<input style="width: 90%;" type="text"/> <input type="button" value="Add"/>
Outside IP	▼		<input type="button" value="Delete"/>

Advance NAT setting. Maximum 10 items for TCP and UDP port mapping.

IPsec ALG: Enable/Disable IPsec ALG;

FTP ALG: Enable/Disable FTP ALG;

PPTP ALG: Enable/Disable PPTP ALG;

Transfer Type: Transfer type using port mapping.

Inside IP: LAN device IP for port mapping.

Inside Port: LAN device port for port mapping.

Outside Port: WAN port for port mapping.

Click **Add** to add new port mapping item and **Delete** to delete current port mapping item.

2.5.3 Net Service

Net Service

HTTP Port	<input type="text" value="80"/>	Telnet Port	<input type="text" value="23"/>
RTP Initial Port	<input type="text" value="10000"/>	RTP Port Quantity	<input type="text" value="200"/>

If modify HTTP or Telnet port,you'd better set it more than 1024,then save and restart.

DHCP Lease Table

Leased IP Address	Client Hardware Address
192.168.10.4	00-09-45-52-06-3f
192.168.10.3	00-09-45-63-75-98
192.168.10.2	00-0f-1f-a0-26-87

HTTP Port: configure HTTP transfer port, default is 80.User may change this port to enhance system's security. When this port is changed, please use <http://xxx.xxx.xxx.xxx:xxxx/> to reconnect.

Telnet Port: configure telnet transfer port, default is 23.

RTP Initial Port: RTP initial port.

RTP Port Quantity: Maximum RTP port quantity, default is 200

Notice:

Settings in this page won't take effect unless save and reboot the device.

If you need to change telnet port or HTTP port, please use the port greater than 1024, because ports under 1024 is system remain ports.

HTTP service if HTTP is set to 0.

2.5.4 Firewall settings

Firewall Configuration

☐ in_access enable
 ☐ out_access enable

Firewall Input Rule Table

Index	Deny/Permit	Protocol	Src Addr	Src Mask	Des Addr	Des Mask	Range	Port

Firewall Output Rule Table

Index	Deny/Permit	Protocol	Src Addr	Src Mask	Des Addr	Des Mask	Range	Port

Input/Output:

Deny/Permit:

Protocol Type:

Port Range:

Src Addr:

Des Addr:

Src Mask:

Des Mask:

Input/Output:

Index to be deleted:

Firewall setting page. User may set up firewall to prevent unauthorized Internet users from accessing private networks connected to the Internet (input rule), or prevent unauthorized private network devices to access the internet.

Access list support two type limits: input_access limit or output_access limit. Each type support 10 items maximum.

AT530 firewall filter is base WAN port. So the source address or input destination address should be WAN port IP address.

Configuration:

in_access enable enable in_access rule

out_access enable enable out_access rule

Input/Output: specify current adding rule is input rule or output rule.

Deny/Permit: specify current adding rule is deny rule or permit rule.

Protocol Type: protocol using in this rule: TCP/IP/ICMP/UDP.

Port Range: port range if this rule

Src Addr: source address. Can be single IP address or network address.

Dest Addr: destination address. Can be IP address or network address.

Src Mask: source address mask. Indicate the source is dedicate IP if set to 255.255.255.255. Otherwise is network ID

Des Mask: Destination address mask. Indicate the source is dedicate IP if set to 255.255.255.255. Otherwise is network ID

2.5.5 QoS settings

QoS Configuration

<

<input type="checkbox"/> VLAN Enable			
<input checked="" type="checkbox"/> VLAN ID Check Enable		Voice/Data VLAN differentiated	Undifferentiated
<input type="checkbox"/> DiffServ Enable		DiffServ Value	0x b8
Voice VLAN ID	256 (0 - 4095)	Data VLAN ID	254 (0 - 4095)
Voice 802.1P Priority	0 (0 - 7)	Data 802.1P Priority	0 (0 - 7)

AT530 IP phone implement QoS based on 802.1p, The QoS is used to mark the network communication priority in the data link/MAC sub-layer. AT530 will sorted the packets using the QoS and sends it to the destination.

1. Voice 802.1p Priority --- Configure the priority of the voice packets in 802.1p protocol.

2. VLAN Enable --- Disable/Enable VLAN function

3. Voice VLAN ID --- configure the Voice/signaling VLAN ID

4. DiffServ Enable --- Disable/Enable Diffserv service

5. DiffServ Value --- Configure Diffserv parameter. The value range : value range:

0x28,0x30,0x38,0x48,0x50,0x58,0x68,0x70,0x78,0x88,0x90,0x98,0xb8.default is 0xb8 ,0xb8 stands for best fast transmission; 28-30 is guarantee for the transmission priority for the 1st rank , 48-58 is guarantee for the transmission priority for the 2nd rank, 68-78 is guarantee for the transmission priority for the 3rd rank, 88-98 is guarantee for the transmission priority for the 4th rank.

6. Data VLAN ID--- Assign VLAN id for data stream.

7. Data 802.1P Priority --- Configure the priority of the data packets (non-voice/signaling data) in 802.1p protocol.

8. Data/Voice DiffServ differentiated --- undifferentiated for Date and voice VLAN is not distinction VLAN tag, Tag differentiated for Date and Voice VLAN is distinction VLAN tag, Date untagged for Date VLAN is distinction VLAN tag

Please refer to [VLAN implement](#) for detail

2.5.6 Advance SIP settings

Advance SIP Configuration
 Private[Unregistered]
 STUN NAT Transverse[FALSE]

STUN Server Addr	<input type="text"/>	STUN Server Port	<input type="text" value="3478"/>
Private Register	<input type="text"/>	Private Proxy	<input type="text"/>
Register Port	<input type="text" value="5060"/>	Proxy Port	<input type="text"/>
Register Username	<input type="text"/>	Proxy Username	<input type="text"/>
Register Password	<input type="text"/>	Proxy Password	<input type="text"/>
Private Domain	<input type="text"/>	Expire Time	<input type="text" value="60"/> (seconds)
Private Number	<input type="text"/>	STUN Effect Time	<input type="text" value="50"/> (seconds)
Private User Agent	<input type="text" value="Voip Phone 1.0"/>	Private Server Type	<input type="text" value="common"/>
Private Display Name	<input type="text"/>	RFC Privacy Edition	<input type="text" value="NONE"/>
Transport Protocol	<input type="text" value="UDP"/>	<input type="checkbox"/> Enable Session Timer	
<input checked="" type="checkbox"/> Enable Via rport	<input type="checkbox"/> Answer With Single Codec		
<input type="checkbox"/> Signal Encode	<input type="checkbox"/> Rtp Encode		
<input type="checkbox"/> Enable PRACK	<input type="checkbox"/> Enable SIP Stun		
<input checked="" type="checkbox"/> Enable Subscribe	<input type="checkbox"/> Enable Keep Authentication		
<input checked="" type="checkbox"/> Enable URI Convert	<input type="checkbox"/> Enable Private Register		
<input type="checkbox"/> Enable Strict Proxy	<input checked="" type="checkbox"/> Enable Quote Name		
<input type="checkbox"/> Auto Detect Server			

This page is used to set the private sip server, stun server, and back up sip server information.

STUN Server setting:

STUN Server Addr: configure stun server address;

STUN Server Port: configure stun server port default 3478

STUN Effect Time: stun detect NAT type circle, unit: minute.

Enable SIP STUN: enable/disable stun.

Enable PRACK: Whether to make gateway or IP phone support Prack function in SIP , we suggest you keeping default setting

Enable Keep Authentication: registering signal together with the authentication information. If enable it, the server will confirm the registering and send back the confirmation message directly instead of requesting the terminals to send authentication information if needed.

Auto Detect Server: Whether to enable the function of auto detecting the server. With this function your ATA and IP phone will send information to auto detect the server at every period of time. If find the server is not available it will try to register the server again.

Enable Session Timer: Whether to enable te RFC4028

Signal Encode: Whether to enable the signal encrypt

Rtp Encode: Whether to enable the voice encrypt

Enable Private Register: Whether to enable the second SIP Server to register

Please refer to **SIP_Config** for the setting for how to set the public alter server.

User can register two sip servers: public sip server and private sip server.these two sip servers are independent from each other and running in the same time.

For how to configure private sip server. Please refer to **SIP_Config**

Enable URI Convert: transfer the # into %23 when sending URI

Enable Strict Proxy: compatible with special server (when the message is returned , they use original address but not the address in via field)

Enable Quote Name: To work with the server , config here to use quotation mark to include the displayname

Enable Subscribe: subscribe the message such as other side's status or the voice mail after successful registration

2.5.7 Digital Map

Digital Map Configuration

☒ End with "#"

☐ Fixed Length

☒ Time out (3--30)

Digital Map Table

Rules:
8[3-8]xxxxx
89xxx
6567
78xxxT2
5[3,7,9]xxxxx

<input style="width: 95%;" type="text"/>	<input type="button" value="Add"/>
<input style="width: 95%;" type="text" value="8[3-8]xxxx"/> ▼	<input type="button" value="Delete"/>

Digital map is a set of rules to determine when the user has finished dialing.

AT530 support below digital map:

Digital Map is based on some rules to judge when user end their dialing and send the number to the server. AT530 support following digital map:

----End With "#": Use # as the end of dialing.

----Fixed Length: When the length of the dialing match, the call will be sent.

----Timeout: Specify the timeout of the last dial digit. The call will be sent after timeout

----Prefix: User define digital map:

[] represents the range of digit, can be a range such as [1-4], or use comma such as [1,3,5], or use a list such as [234]

x represents any one digit between 0~9

Tn represents the last digit timeout. n represents the time from 0~9 second, it is necessary. Tn must be the last two digit in the entry. If Tn is not included in the entry, we use T0 as default, it means system will sent the number immediately if the number matches the entry.

Example:

[1-8]xxx	All number from 1000 to 89999 will be sent immediately.
9xxxxxxx	8 digits numbers begin with 9 will be sent immediately.
911	Number 911 will be sent will be immediately

99xT4 3 digits numbers begin with 99 with be sent after four seconds.

2.5.8 Call Service Settings

Call Service

Hotline	<input style="width: 95%;" type="text"/>		
Call Forward	<div>Off ▼</div>		
	Phone Number <input style="width: 150px;" type="text"/>	Addr <input style="width: 100px;" type="text"/>	Port <input style="width: 50px;" type="text" value="5060"/>
<input type="checkbox"/> No Disturb	<input type="checkbox"/> Ban Outgoing		
<input checked="" type="checkbox"/> Enable Call Transfer	<input checked="" type="checkbox"/> Enable Call Waiting		
<input checked="" type="checkbox"/> Enable Three Way Call	<input checked="" type="checkbox"/> Accept Any Call		
<input type="checkbox"/> Auto Answer	<input type="checkbox"/> Enable Voice Record		
<input type="checkbox"/> User-Defined Voice	<input checked="" type="checkbox"/> Incoming Record Playing		
<input type="text" value="20"/> No Answer Time(seconds)	P2P IP Prefix <input style="width: 100px;" type="text"/>		
<input type="checkbox"/> Use Record Server	Remote Record No <input style="width: 150px;" type="text"/>		

APPLY

Black List

<input style="width: 95%;" type="text"/>	Add	▼	Delete
--	--	--	---

Limit List

<input style="width: 95%;" type="text"/>	Add	▼	Delete
--	--	--	---

User configure the value add service such as hotline, call forward, call transfer, 3-way conference call .etc in this page

Hotline: configure hotline number. AT530 immediately dials this number after hook-off if it is set.

Call Forward: Please refer to Value add service for detail.

No Disturb: DND, do not disturb, enable this option to refuse any calls.

Ban Outgoing: Enable this to ban outgoing calls.

Enable Call Transfer: Please refer to Value add service for detail.

Enable Three Way Call: Please refer to Value add service for detail.

Enable Call Waiting: Enable/disable Call Waiting

Accept Any Call: If this option is disable, AT530 refuse the incoming call when the called number is different from AT530's phone number.

No Answer Time: no answer call forward time setting.

Auto Answer: Enable/disable auto answer function.

Enable Voice Record: Enable/disable answering machine function. Please refer to **Record Function** for detail.

User-defined Voice: Use customized greeting message.

Incoming Record Playing: simultaneously play the message when recording.

P2P IP Prefix: Config the point to point calling. For example , if you want to call IP 192.168.1.119 Just defin 192.168.1. here and you can dial #119 to make the point to point call with the IP phone of 192.168.1.119

Use Record Server: Config the supporting of server recording , transfer all the recording to

server.

Remote Record No: Config the recording number , if you upload your recording to this account , you can login this account to get your voice recording

Black List: incoming call in these phone numbers will be refused.

Limit List: outgoing calls with these phone numbers will be refused

2.5.9 MMI Filter

MMI Filter

☐ MMI Filter

Start IP

End IP

Start IP	<input type="text"/>	End IP	<input type="text"/>	<input type="button" value="Add"/>
Start IP to be deleted	<input type="text"/>			<input type="button" value="Delete"/>

MMI filter is used to make access limit to AT530 IP phone.

When MMI filter is enable. Only IP address within the *start IP* and *end IP* can access AT530 IP phone.

2.5.10 Audio Settings

IP Phone

Audio Settings

Coding Rule	<input type="text" value="g711Alaw64k"/>	G729 Payload Length	<input type="text" value="20ms"/>
Signal Standard	<input type="text" value="China"/>	Ring Type	<input type="text" value="Type 1"/>
Input Volume	<input type="text" value="9"/> (1-9)	Output Volume	<input type="text" value="9"/> (1-9)
Handfree Volume	<input type="text" value="4"/> (1-9)	Ring Volume	<input type="text" value="5"/> (1-9)
Dtmf Payload Type	<input type="text" value="101"/> (96-127)	Handdown Time	<input type="text" value="200"/> ms
<input type="checkbox"/> VAD		<input type="checkbox"/> Disable Handfree	

CODEC: select the prefer CODEC; support ulaw, alaw,G729 and G7231 5.3/6.3

Signal Standard: Signal standard for different area.

Input Volume: Handset in volume.

Output Volume: Handset out volume.

Handfree Volume: Hand free volume

Handdown Time: hand down detect time.

G729 Payload Length: G729 payload length

VAD: Enable/disable Voice Activity Detection, but G.711 not supports VAD

Handdown Time: The minimum response time of the flash hook , default is 200ms. if you press the hook for a shorter time than this setting, there will be no effect for your pressing

Disable Handfree: Disable the handsfree function , mainly used in call center where the telephonist use the RJ-9 headset and press the handsfree to hang up and pick up the phone

2.5.11 VPN

IP Phone

VPN Tunnel

VPN IP	0.0.0.0		
UDP Tunnel			
VPN Server Addr	0.0.0.0	VPN Server Port	80
Server Group ID	VPN	Server Area Code	12345
L2TP			
VPN Server Addr		VPN User Name	
VPN Password			

☒ UDP Tunnel ☐ L2TP
 ☐ Enable VPN

this page is VPN setting page , the IP phone support the VPN with UDP and L2TP protocol .The parameters is as below

VPN IP: After VPN registered successfully, VPN server will give an IP address to the terminal . If there is a IP address shown on terminal (except for 0.0.0.0) ,it means your VPN has registered

UDP Tunnel

VPN Server Addr: register to the address of VPN server .

VPN Server Port: Register to the port of VPN server

Server Group ID: the group ID of UDP VPN

Server Area Code: the area code of VPN server

L2TP

VPN Server Addr: register to the address of VPN server

VPN User Name: L2TP VPN username

VPN Password: L2TP VPN password

☒ UDP Tunnel ☐ L2TP
 ☐ Enable VPN

UDPTunnel: use the UDP to visit VPN

L2TP: use the L2TP to visit VPN

Enable VPN: Enable the VPN server, you must choose UDP or L2TP type in advance

2.5.12 Memory Key

IP Phone

Memory Key Setting

Memory 1	<input type="text" value="123"/>	Memory 2	<input type="text"/>
Memory 3	<input type="text"/>	Memory 4	<input type="text"/>
Memory 5	<input type="text"/>	Memory 6	<input type="text"/>
Memory 7	<input type="text"/>	Memory 8	<input type="text"/>
Memory 9	<input type="text"/>		

the configuration of 9 speed call buttons

2.6 Dial-Peer

Dial-Peer

Number	Call Mode	Destination	Port	Alias	Suffix	Del length
2T	sip	255.255.255.255	5060	del	no suffix	1
3T	sip	0.0.0.0	5060	del	no suffix	1
123	sip	0.0.0.0	5060	all:8675583018049	no suffix	0
0T	sip	0.0.0.0	5060	rep:86	no suffix	1
179	sip	192.168.1.179	5060	no alias	no suffix	0

Please refer to [How to use dial rule](#) for detail.

2.7 Config Manage

Save Config: save current settings.

Clear Config: restore to default settings.

Backup Config: Backup the config file, via point the right key of mouse-> save target as....->will pop a save window, then type the config file name in the File name(the file type is text file)

Notice: clear config in admin mode, all settings restores to factory default; clear config in guest modem, all settings except sip, advance sip restore to factory default.

2.8 Update

2.8.1 Web Update:

Update IP phone's settings or firmware. Firmware file is .z extension when configure file is .cfg extension, AT530 will auto select configure update or firmware update according the extension.

2.8.2 TFTP/FTP Update:

upload/download the configure file with FTP or TFTP server. or download firmware from FTP or TFTP server

Back up configure file to your FTP/TFTP server.

FTP/TFTP Download	
Server	<input type="text" value="192.168.1.53"/>
Username	<input type="text" value="edwin"/>
Password	<input type="password" value="....."/>
File name	<input type="text" value="ATAconfigure.cfg"/>
Type	<input type="text" value="Config file export"/>
Porotocol	<input type="text" value="FTP"/>
<input type="button" value="apply"/>	

configure use .cfg extension.

The Type includes two parts of config file export and config file import

Config file export:export the config file

Config file import:import the config file

2.8.3 Auto Provisioning:

AT530 IP phone support FTP and TFTP auto update. The gateway will auto obtain the configure file from your update server if configured. To obtain the original configure file, you can use the FTP/TFTP back up as describe above. Configure file using module structure, user may remain the concerned modules and remove other modules. Put the configure file in the root directory of update serve when finish editing.

IP Phone

Auto Provisioning

Current Version	2.0002
Server Address	<input type="text" value="0.0.0.0"/>
Username	<input type="text" value="user"/>
Password	<input type="password" value="...."/>
Config File Name	<input type="text"/>
Config Encrypt Key	<input type="text"/>
Protocol Type	FTP <input type="button" value="v"/>
Update Interval Time	<input type="text" value="1"/> Hour
Update Mode	Disable <input type="button" value="v"/>

Current Version: the system will display the current version number .

Server Address: FTP/TFTP server address

Username: FTP server user name

Password: FTP server password

Config File Name: The name of configuration file

Config Encrypt Key: The encrypt key of confirmation file

Protocol Type: The protocol type that used for upgrading

Update Interval Time: The interval time that the terminals search for new configuration file.

Update Mode: auto provision mode; Disable: not auto update, Update after reboot:auto update after reboot, Update at time interval:auto update after a certain time

Configure file version was in the <<VOIP CONFIG FILE>> and <GLOBLE CONFIG MODULE> ConfFile Version

For instance:

Gateway original version is:

<<VOIP CONFIG FILE>>Version:1.0000

<GLOBLE CONFIG MODULE> ConfFile Version: 6

User may edit the configure file version to:

<<VOIP CONFIG FILE>>Version:1.0007

<GLOBLE CONFIG MODULE> ConfFile Version: 7

2.9 System Manage

2.9.1 Account Manage

Account Configuration

Keypad password

...

User Name	User Level
admin	Root
guest	General

Set web access account or keypad password of AT530.

2.9.2 Phone Book:

User may set contacts in this page, and the contacts will be saved in the memory. Then using the Pbook, Vol+,Vol-,Menu/OK and Exit keys to choose your friend in the contacts and then press # to call out.

2.9.3 Syslog Config:

IP Phone

Syslog Configuration

Server Address	0.0.0.0
Server Port	514
MGR Log Level	None ▼
SIP Log Level	None ▼
IAX2 Log Level	None ▼
<input type="checkbox"/> Enable Syslog	

Server IP: set the syslog server address

Server Port: set the syslog server port

MGR Log Level: set the MGR log level

SIP Log Level: set the SIP log level

IAX2 Log Level: set the IAX2 log level

Please click “apply” after setting

2.9.4 Time Set:

IP Phone

Time Configuration

SNTP Timeset	
server	<input type="text" value="207.46.130.100"/>
timezone	(GMT+08:00)Beijing,Hong Kong,Urumqi ▼
timeout	<input type="text" value="60"/> (seconds)
<input checked="" type="checkbox"/> select sntp	<input type="checkbox"/> Daylight

Manual Timeset	
year	<input type="text"/>
months	<input type="text"/>
day	<input type="text"/>
hour	<input type="text"/>
minute	<input type="text"/>

Server:type the ip address of time server

Timezone:select correct time zone in list box

Timeout: longest response time for SNTP

Manual Timeset:The time setting

Daylight:Daylight saving time

2.9.5 Reboot:

Reboot IP phone, some setting needs to reboot to make it works. Please always save config before reboot, otherwise the setting will return to previous setting.

3 Use keypad configure AT530 IP phone

3.1 Keypad function

User can configure AT530 through its keypad. List below is the keypad function

Keypad	Mode	Function/Display
Idle mode	----	show current time
Sysinfo	Idle mode	circularly show phone number, wan ip, gateway info
Menu/OK	Idle mode	enter config mode, default password 123
	config mode	confirm or enter sub-menu
Exit	config mode	exit
Up	Calling mode	volume up (Max:9)
	config mode	Page up
Down	Calling mode	volume down (Min:1)
	config mode	Page down
Del	Calling mode	Delete digits
	config mode	Delete digits
Mute	Calling mode	Mute
Out call	Idle mode	Outgoing call menu
In call	Idle mode	Incoming call menu
Record	Idle mode	Enter record menu, usage refer FAQ
Pbook	Idle mode	Enter Phone book set up
Handfree	Calling mode	Handfree
0 – 9	Calling mode	Digits 0~9
	config mode	Hit quickly to switch between numeric or alphabetic
*	Calling mode	Use in <u>3-way conference call</u> .
	config mode	Use as “.” In the ip address setting
#	Calling mode	Use as end key of dialing or the dial number
Hold	Calling mode	Hold, detail refer <u>value add service</u>
FWD	Calling mode	Transfer, detail refer <u>value add service</u>
Redial	Calling mode	Redial key
Send	Calling mode	call key
No.1~No.9	Idle mode	Speed dial key

3.2 Keypad Menu

User may use **SET**, **Menu/ok**, **Exit**, **Vol+**, **Vol-** to config AT530 detail setting. Press **Menu/ok** to enter config mode, and the default password is 123.

Below list the keypad menu of AT530

AT530 Keypad Menu				
Level 1	Level 2	Level 3	Level 4	
Network	LAN	Bridge Mode		
		IP		
		Netmask		
		DHCP Server		
		NAT	Switch	
			FTPalg	
			IPSec alg	
			PPTPalg	
	WAN	Status		
		Static Net	1. IP	
			2. NetMask	
			3. Gateway	
			4. DNS	
			5. DNS2	
		PPPoE	User name	
			Password	
	QoS			
	VLAN	Enable		
		Date Vlan ID		
		Voice Vlan ID		
Call Feature	Phone-number			
		Public SIP		
		Private SIP		
	Limit-List	Current		
		ADD		
		DEL		
	Black-List	Current		
		ADD		
		DEL		
	FastCall			
Three Call				

	Call-Transfer		
	Call-Waiting		
	Call-Forward	Condition	
		SIP	Transfer Num
			Transfer IP
			Port
	Dial-Rule	End With #	
		Fixed Length	Switch
Length			
SIP	Reg Status	Public Reg	
		Private Reg	
	Detect-server		
	Dtmf-mode		
	Interval-time		
	Swap-server		
	RFC-version		
	Signal-Port		
	Stun	Switch	
		Addr	
		Port	
		Expire Time	
DSP	Codec		
	Handdown-time		
	Dtmf-Volume		
	Input-volume		
	Output-Volume		
Other Setting	Syslog	Switch	
		Server-IP	
		Server-Port	
4. System	1. Save		
	2. Reboot		
	3. Set Default		

4 Telnet Console

4.1 Introduce

4.1.1 Basic structure

User may use telnet command to access and manage IP phone.

AT530 adopts tree structure for telnet. Every node contains its sub-nodes or local command. User can type "help" or "?" whenever to see sub-nodes and all local command under current node.

Besides local command, there are some global commands can be used in each node.

4.1.2 Basic command

Logout: exit telnet mode.

Write: save current settings.

Type sub-nodes name in current node to switch to sub-node.

Type "!" or "exit" in current node to return to parent-node.

Type "help" or "?" can see all sub-nodes and all local command under current node, every help item has comments such as <command> or <node> to distinguish sub-nodes and local command. Type "help" or "?" in command can see all parameters using in this command.

When typing node name or command, user no need to key the full name, use TAB button will make it more efficient.

There are two types in command parameters: optional and required. "required" parameter use "-" as prefix and "optional" use "_" as prefix. User may type "-" or "_" then press TAB button for complementarily.

4.2 Global Command

Global command is available under all nodes, AT530 support following commands:

Command	Function	Example
chinese	Set to Chinese UI	#chinese
clear	Clear telnet screen	#clear
english	Set to English UI	#english
exit	Return to parent-node	#exit
help	Show help info Show sub-nodes and local command	1. #help ping 2. #help
history	Show command history	#history
logout	Exit	#logout
ping	Ping command, use to check network,	#ping www.google.com
tree	Print tree structure of current command	#tree
who	Show current user	#who
write	Save setting to flash	#write

5 Tree Structure

5.1.1 account

path: <account>#
[stop]start Syslog ---syslog [no] start
Configure Syslog server address and port ---syslog server -ip x.x.x.x _port xxx
Example: #<config-account-syslog>#server -ip 202.112.20.10
Show syslog settings ---syslog show
Show all account settings ---show

5.1.2 config

➤ accesslist firewall config

path: <config-accesslist>#
add firewall rule ---entry -I/O xxx -P/D xxx -proto xxx -srcaddr x.x.x.x
-srcmask x.x.x.x -desaddr x.x.x.x -desmask x.x.x.x -portrange xxx -portnum xxx
Example: <config-accesslist>#entry -I/O input -P/D deny -proto udp -straddr 202.112.10.1
-srcmask 255.255.255.0 -desaddr 210.25.132.1 -desmask 255.255.255.0 -portrange neq
-portnum 5060
delete firewall rule ---no entry -I/O xxx -index xxx
Example : <config-accesslist>#no entry -I/O input -index 1
Show firewall settings ---show
[disable] enable input filter ---[no]in-access
[disable] enable output filter ---[no]out-access

➤ DHCP

path: <config-dhcp>#
add DHCP rule ---entry -name xxx -startip x.x.x.x -endip x.x.x.x
-netmask x.x.x.x -gateway x.x.x.x -dnsserver x.x.x.x _time xxx
Example: <config-dhcp>#entry -name lan2004 -startip 192.168.1.2 -endip 192.168.1.254
-netmask 255.255.255.0 -gateway 192.168.1.1 -dnsserver 192.168.10.18
delete DHCP rule ---no entry -name xxx
Example: <config-dhcp>#no entry -name lan2004
Show DHCP settings ---show
[disable]enable DNS-relay ---[no]dns-relay

➤ dialrule

path: <config-dialrule>#
[disable] enable End with # ---[no]endchar
Set end with fix length ---fixlen xxx
Disable end with fix length ---no fixlen
Set timeout to send ---timeout-send xxx
Disable timeout to send ---no timeout-send
Add digital map ---entry -prefix xxx -length xxx
Example: <config-dialrule>#entry -prefix 010 -length 11
Delete digital map rule ---no entry -prefix xxx
Example: <config-dialrule>#no entry -prefix 010
Show current digital map ---show

➤ LAN interface settings

path: <config-interface-fastethernet-lan>#
[disable]enable bridge mode ---[no]bridgemode
[disable]enable DHCP service ---[no]dhcp-server
[disable]enable NAT ---[no]nat

Show current DHCP rules ---dhcpshow
Show LAN port IP address ---ipshow
Show NAT info ---natshow
Change LAN port IP address ---ip -addr x.x.x.x -mask x.x.x.x
Example:<config-interface-fastethernet-lan>#ip -addr 192.168.1.10 -mask 255.255.255.0
➤ WAN interface settings
path: <config-interface-fastethernet-wan>#
[disable]enable dhcp client ---[no]dhcp
[disable]enable pppoe ---[no]pppoe
[disable]enable QOS ---[no]qos
Set default gateway IP ---gateway x.x.x.x
Clear default gateway IP ---no gateway
Set WAN port IP address ---ip -address x.x.x.x -mask x.x.x.x
Example:<config-interface-fastethernet-wan>#ip -addr 202.112.241.100 -mask 255.255.255.0
You need to reconnect if the WAN port has been changed.
Show WAN port settings ---show
➤ MMI Filter
path: <config-mmifilter>#
add filter rule ---entry -start x.x.x.x -end x.x.x.x
Example:<config-mmifilter>#entry -start 202.112.20.1 -end 202.112.20.255
Delete filter rule ---no entry -start x.x.x.x
Example:<config-mmifilter>#no entry -start 202.112.20.1
Show filter rule ---show
[disable]enable MMI filter ---[no]start-filter
➤ NAT settings
path: <config-nat>#
[disable]enable ftp alg ---[no]ftpalg
[disable]enable ipsec alg ---[no]ipsecalg
[disable]enable pptp alg ---[no]pptpalg
Add TCP mapping rule ---tcp-entry -ip x.x.x.x -lanport xxx -wanport xxx
Example:<config-nat>#tcp-entry -ip 192.168.1.5 -lanport 1720 -wanport 1000
Delete TCP mapping rule ---no entry -ip x.x.x.x -lanport xxx -wanport xxx
Example:<config-nat>#no tcp-entry -ip 192.168.1.5 -lanport 5060 -wanport 1000
Add UDP mapping rule ---udp-entry -ip x.x.x.x -lanport xxx -wanport xxx
Delete UDP mapping rule ---no udp-entry -ip x.x.x.x -lanport xxx -wanport xxx
Show NAT info ---show
➤ Netservice
path: <config-netservice>#
Set DNS address ---dns -ip x.x.x.x _domain xxx
Example:<config-netservice>#dns -ip 202.112.10.36 _domain voip.com
Set alternate DNS address ---alterdns -ip x.x.x.x _domain xxx
Set hostname ---hostname xxx
Set http access port ---http-port xxx
Show http access setting ---http-port
Set telnet access port ---telnet-port xxx
Show telnet access port ---telnet-port
Set RTP initial port and quantity ---media-port -startport xxx -number xxxx
Example:<config-netservice>#media-port -startport 10000 -number 200
Add route rule ---route -gateway x.x.x.x -addr x.x.x.x -mask x.x.x.x
Example:Arcihfone<config-netservice>#route -gateway 202.112.10.1 -addr 202.112.210.1 -mask 255.255.255.0
Delete route rule ---no route -gateway x.x.x.x -addr x.x.x.x -mask x.x.x.x

Show route info ---route
Show net service info ---show

➤ Dial-peer settings
path: <config-pbook>#
[disable]enable calling through GK and proxy ---[no]enableGKandProxy
Add number-IP bond entry ---entry -number xxx -ip x.x.x.x -protocol xxx
Example:<config-pbook>#entry -number 100 -ip 202.112.20.100 -protocol sip
Add number-IP bond and add prefix to the dial number
---entry -number xxx -ip x.x.x.x -protocol xxx _add xxx
Example:<config-pbook>#entry -number 100 -ip 202.112.20.100 -protocol sip _add 123(dial 100 and will send 123100 according this rule)
Add number-IP bond and replace the destination with another number
---entry -number xxx -ip x.x.x.x -protocol xxx _all xxx
Example:<config-pbook>#entry -number 100 -ip 202.112.20.100 -protocol sip _all 123(user dial 100 and gateway will sent 100 instead)
Add number-IP bond and delete the prefix of the destination number
---entry -number xxx -ip x.x.x.x -protocol xxx _del xxx
Example:<config-pbook>#entry -number 1234 -ip 202.112.20.100 -protocol sip _del 2 (dial 1234 will send 34 instead)
Add number-IP bond and replace the prefix with another number
---entry -number xxx -ip x.x.x.x -protocol xxx _rep xxx _length xxx
Example:<config-pbook>#entry -number 1234 -ip 202.112.20.100 -protocol sip _rep 567 _length 2(dial 1234 will send 56734)
Delete dial-peer entry ---no entry -number xxx
Show current dial-peer rules ---show
Set default voip protocol ---default-protocol xxx

➤ Port settings
path: <config-port># 或<config-port X>#
set accecp relay mode ---accept-relay xxx
set callerid mode ---callerid xxx
disable callerid ---no callerid
config call forward ---callforward -conditon xxx -number xxx -ip xxx -port xxx -protocol xxx
Example:<config-port 0>#callforward -condition busy -number 100 -ip 202.112.10.100 -port 5060 -protocol sip
Disable call forward ---no callforward
[disable]enable call transfer ---[no]calltransfer
[disable]enable call waiting ---[no]callwaiting
Set prefer codec ---codec xxx
Set DTMF gain ---dtmfvolume xxx
Set black list ---in-limit xxx
Show black list ---in-limit
Set input volume ---input xxx
Set outgoing limit list ---out-limit xxx
Show outgoing limit list ---out-limit
Set output volume ---output xxx
[disable]enable outgoing limit ---[no]shutdown out
[disable]enable black list ---[no]shutdown in
[disable]enable outgoing limit and black list ---[no]shutdown
[disable]enable 3-way conference ---[no]threetalk
Show port settings ---show

➤ PPPoE settings

path: <config-pppoe>#

PPPoE account settings ---auth -user xxx -password xxx

Example:<config-pppoe>#auth -user aaa -password 123456

[disable]enable service settings ---[no]service xxx

Show pppoe settings ---show

➤ QoS settings

path: <config-qos>#

[delete]add QoS table entry --- [no]entry -addr x.x.x.x -mask x.x.x.x

Example:<config-qos>#entry -addr 202.112.10.1 -mask 255.255.255.0

[disable]enable include QoS table ---[no]include

Show QoS settings ---show

➤ SIP settings

path: <config-sip>#

[disable]enable registration ---[no] register

[disable]enable auto detect server ---[no] detect-server

Set sip domain ---default-domain xxx

Set DTMF mode ---dtmf-mode xxx

Set auto detect interval time ---interval-time xxx

Set RFC edition ---rfc-version xxx

[disable]enable auto swap server --- [no]swap-server

Set sip account ---number-password -number xxx -password xxx

Set local SIP signal port --- signalport xxx

Set proxy server ---server proxy -ip x.x.x.x _port xxx _user xxx
_password xxx

Example:<config-sip-server># proxy ip 210.25.23.22 _port 5060 _user aaa _password
123456

Set register server info ---server register -ip x.x.x.x _port xxx -user xxx
_password xxx

Set alter proxy info ---alter-server proxy -ip x.x.x.x _port xxx _user xxx
_password xxx

Set alter server info ---alter-server register -ip x.x.x.x _port xxx _user xxx
_password xxx

[disable]enable stun server ---stun [no]enable

Set stun detecting interval time ---stun interval-time xxx

Set stun server ip and port ---stun -ip x.x.x.x -port xxx

Show current sip info ---show

➤ User management

path: <config-user>#

Change user right. ---access -user xxx -access xxx

Example:<config-user>#access -user aaa -access 7

Change user password ---password -user xxx

Add new user ---entry -user xxx -access xxx

Example:<config-user>#entry -user abc -access 7

Delete user entry ---no entry -user xxx

Show current sip info ---show

5.1.3 Debug (Level 0~7)

path: <debug>#
show debug setting ---show
[disable]enable debug all modules ---[no] all xxx
[disable]enable debug app module ---[no] app xxx
[disable]enable debug cdr module ---[no] cdr xxx
[disable]enable debug sip module ---[no] sip xxx
[disable]enable debug tel module ---[no] tel xxx
[disable]enable debug dsp module ---[no] dsp xxx

5.1.4 download configure to flash

usage: #download tftp -ip x.x.x.x -file xxx
#download ftp -user xxx -password xxx -ip x.x.x.x -file xxx
Example: #download ftp -user abc -password 123 -ip 202.112.20.15 -file AT530.cfg

5.1.5 password

usage: #password
Enter new password:xxx
Confirm new password:xxx

5.1.6 reload

usage: #reload
Reboot system

5.1.7 show system running info

➤ accesslist
path: <show>#
show: accesslist (firewall) settings
Example: #<show>#accesslist
➤ basic
path: <show>#
show network status
Example: #<show>#basic
➤ call
path: <show>#
show current call info
Example: #<show>#call active
➤ capability
path: <show>#
show CODEC capability
Example: #<show>#capability
➤ debugging
path: <show>#
show debug info
Example: #<show>#debugging
➤ dhcp-server
path: <show>#
show LAN status and DHCP server info
Example: #<show># dhcp-server
➤ dial-rule
path: <show>#
show digital-map info
Example: #<show># dial-rule
➤ interface
path: <show>#
show LAN info

Example:#<show>#interface fastethernet lan
show WAN info

Example:#<show>#interface fastethernet wan

➤ ip

path: <show>#

show arp table info

Example:#<show>#ip arp

Show DNS server info

Example:#<show>#ip dns

Show netstate info

Example:#<show>#ip netstat

Show route info

Example:#<show>#ip route

Show icmp packets Stat.

Example:#<show>#ip icmp

Show igmp packets Stat.

Example:#<show>#ip igmp

Show ip packets Stat.

Example:#<show>#ip ip

Show RTP packets Stat.

Example:#<show>#ip rtp

Show TCP packets Stat.

Example:#<show>#ip tcp

Show UDP packets Stat.

Example:#<show>#ip udp

➤ memory

path: <show>#

show IP phone memory

Example:#<show>#memory

➤ nat

path: <show>#

show NAT information

Example:#<show>#nat

➤ port

path: <show>#

show caller-ID info

Example:#<show>#port callerID

show dsp info

Example:#<show>#port dsp

show hotline info

Example:#<show>#port hotline

show black list info

Example:#<show>#port in-limit

show outgoing limit info

Example:#<show>#port out-limit

show current phone number

Example:#<show>#port number

show current port status

Example:#<show>#port status

➤ PPPoE

path: <show>#

show PPPoE info

Example:#<show>#pppoe

➤ qos

path: <show>#

show QoS table info

Example:#<show>#qos

➤ sip

path: <show>#

show sip info

Example:#<show>#sip

➤ udptunnel

path: <show>#

show UDP tunnel info

Example:#<show># udptunnel

➤ uptime

path: <show>#

show running time

Example:#<show># uptime

➤ version

path: <show>#

show IP phone version

Example:#<show># version

5.1.8 telnet and logout

Usage: #telnet -target -port

Login:xxx

Password:xxx

#

#logout

5.1.9 timesettings

path: <time>#

---manualset -year xxx -month xxx -day xxx -hour xxx -minute xxx -second xxx

Example:<time>#manulset -year 2004 -month 10 -day 1 -hour 8 -minitute 30 -second 0

[disable]enable SNTP server

---sntp [no] start

Set SNTP IP address

---sntp server x.x.x.x

Set SNTP server timeout

---sntp timeout xxx

Set timezone (-12~+12)

---sntp zone xxx

Show SNTP info

---sntp show

Show current time

---print

5.1.10 tracert trace network path info

usage: #tracert -host

Example:#tracert !! [HYPERLINK "http://www.google.com"](http://www.google.com) ¶ www.google.com[⊥]

5.1.11 update IP phone

usage: # update ftp -user xxx -password xxx -ip x.x.x.x -file xxx

update tftp -ip x.x.x.x -file xxx

Example:# update ftp -user abc -password 123 -ip 202.112.20.15 -file AT530.dlf

5.1.12 upload configure file

usage: # upload ftp -user xxx -password xxx -ip x.x.x.x -file xxx

upload tftp -ip x.x.x.x -file xxx

6 Network Diagnosis

There are some telnet commands for checking your network. Now Listing below for your information


Command	Function	Example
ping	Check if the destination is accessible	#ping www.google.com
tracert	Show network path info	#tracert <u>www.google.com</u>
show basic	Show network settings	#show basic
show ip route	Show route table	#show ip route
show ip arp	Show arp table	#show ip arp
show ip netstat	Netstat programe	#show ip netstat
telnet	Telnet to another device	#telnet 192.168.1.2

7 Restore to factory default

#setdefault clear IP phone settings expect network part

#setdefault all clear all settings.

8 POST Mode(safe mode)

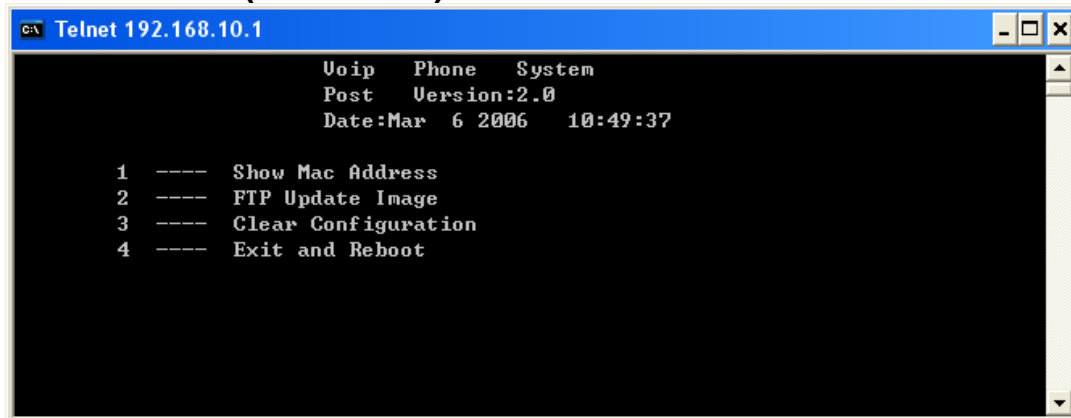

AT530 provide safe mode. When there is booting problem because of setting problem or firmware problem. User can restore the factory setting or upgrade to a new firmware to solve this problem.

How to enter safe mode?

There will be a schedule bar in the AT530 booting procedure, press # key within the first 5 seconds, then the phone will go to POST mode. It has a default ip 192.168.10.1 in POST mode. User may change the PC's IP address to 192.168.10.xx and telnet to 192.168.10.1 to access the IP phone in POST mode.

User can accord the guide in post mode to clear the settings or upgrade the firmware.

9 FAQ

9.1.1 How many servers may AT530 register simultaneously?

AT530 is able to register two SIP servers simultaneously, and redundancy servers. User can configure the dial peer to route calls between these servers. Please refer [“How to use the dial rule?”](#) for detail.

9.1.2 Why the settings vanish after reboot?

Please go to Config Manage→Save Config to save your setting always.

9.1.3 How to use the dial rule?

AT530 provide flexible dial rule, with different dial-rule configure, user can easily implement the following function:

----Replace, delete or add prefix of the dial number.

----Make direct IP to IP call

----Place the call to different servers according the prefix.

You can click “Add” to add a new dial rule. Below is the detail setting of the dial-rule:

Phone Number: The Number suit for this dial rule, can be set as full match or prefix match. Full match means that if the number user dialed is completely the same as this number, the call will use this dial-rule. Prefix match means that if prefix of the number that the user dials is the same as the prefix, the call will use this dial-rule, to distinguish from the full match case, you need to add “T” after the prefix number in the phone number setting.

Call Mode: support SIP..

Destination (optional): call destination, can be IP or domain. Default is 0.0.0.0, in this case the call will be routed to the Public SIP server. If you set the destination to 255.255.255.255, then the call will be routed to the private SIP server. Also you can key other address here to make direct IP calls

Port (optional): Configure the port of the destination, default is 5060 in SIP

Alias (optional): Set up the Alias. We support four Alias as below. Alias need to co-work with the *Del Length*:

- add:xxx, add prefix to the phone number, can set to reduce the dial length.
- all: xxx, replace the phone number with the xxx, can use as speed dial function.
- del, delete the first N numbers. N is set in the *Del Length*
- rep:xxx, replace the first N numbers. N is set in the *Del Length*. For Example: Use wants to place a call 8610-62281493, then you can set the *phone number* in the dial rule as 010T, and set the *Alias* as rep:8610, and set the *Del Length* to 3. Then all calls begin with 010 will be changed to 8610 xxxxxxxx.

Suffix (optional): Configure suffix, show no suffix if not set

Instance:

Dial-Peer

Number	Call Mode	Destination	Port	Alias	Suffix	Del length
2T	sip	255.255.255.255	5060	del	no suffix	1
3T	sip	0.0.0.0	5060	del	no suffix	1
123	sip	0.0.0.0	5060	all:8675583018049	no suffix	0
0T	sip	0.0.0.0	5060	rep:86	no suffix	1
179	sip	192.168.1.179	5060	no alias	no suffix	0

2T rule: If the call starts with 2, the first 2 will be deleted, and the rest number will be sent to private SIP server.

3T rule: If the call starts with 3, the first 3 will be deleted, and the rest number will be sent to public SIP server.

123 rule: Dial 123 and will send 8675583018049 to your server. Used as speed dial function.

0T rule: If the call begins with 0, the first 0 will be replaced by 86. Means that if you dial 075583018049 and AT530 will send 8675583018049 to your server.

179 rule: When you dial 179, the call will send to 192.168.1.179, suit for LAN application without setting up a SIP server.

9.1.4 How to use speed dial function?

There are 9 speed dial keys in the AT530 panel, Usage:

Set speed dial number: press the speed key and enter the speed dial number and then press Menu/OK key to save the setting.

Pick up the handset and press the speed dial key to dial the pre-defined number.

9.1.5 How to configure digital map?

Please refer the [digit map](#).

9.1.6 How to use Call Forward, Call Transfer and 3-way Conference calls?

User may set up the configuration in the *Call Service* page to use these value add services.

Call Service	
Hotline	<input type="text"/>
Call Forward	<input checked="" type="radio"/> Off <input type="radio"/> Busy <input type="radio"/> No Answer <input type="radio"/> Always
	Phone Number <input type="text"/> Addr <input type="text"/> Port <input type="text" value="5060"/>
<input type="checkbox"/> No Disturb	<input type="checkbox"/> Ban Outgoing
<input checked="" type="checkbox"/> Enable Call Transfer	<input checked="" type="checkbox"/> Enable Call Waiting
<input checked="" type="checkbox"/> Enable Three Way Call	<input checked="" type="checkbox"/> Accept Any Call
<input type="checkbox"/> Auto Answer	<input type="checkbox"/> Enable Voice Record
<input type="checkbox"/> User-Defined Voice	<input checked="" type="checkbox"/> Incoming Record Playing
<input type="text" value="20"/> No Answer Time(seconds)	
<input type="button" value="Apply"/>	

➤ Call Forward:

----Forward when busy: select *Busy* in the *Call Forward* Field, and Key in the destination phone number in the *Forward Number*. If someone calls you when you have a call, the caller will be forwarded to the destination number.

----Forward no answer: Select *No Answer* in the *Call Forward* Field, and Key in the destination phone number in the *Forward Number*, fill the time in the *No Answer Time*. If someone calls you and no one

answer the caller during the No Answer Time, the call will be forward to the destination number.

----Forward Always: Select *Always* in the *Call Forward* Field, and Key in the destination phone number in the *Forward Number*, then any one call this gateway will be forward to the destination number.

➤ Call Transfer:

Check the *Enable Call Transfer*.

Unattended transfer:

If A is the AT530 user, and B calls and talking with A through VoIP. A can **press FWD button** to hold the call with B, and then **enter C's number**. B will be transferred to C and can talk with C.

Attended transfer:

Only SIP protocol support this function .If A is the AT530 user, and B calls and talking with A through VoIP. A can **press Hold button** to hold the call with B, and then **enter C's number** to talk will C. and press **Hold** to switch back to A, and then press **FWD** key , B will be transferred to C and can talk with C.

➤ 3-Way Conference Calls

Check Enable Three Way Call

Assume A is the AT530 user, and B calls and talking with A through VoIP. A can **press hold button** to hold the call with B, then **enter C's number** to talk with C, and then **press * button** again to make 3-way conference calls.

9.1.7 How to use the record function?

Call Service

Hotline	<input style="width: 100%;" type="text"/>		
Call Forward	<input checked="" type="radio"/> Off <input type="radio"/> Busy <input type="radio"/> No Answer <input type="radio"/> Always		
	Phone Number <input style="width: 150px;" type="text"/>	Addr <input style="width: 150px;" type="text"/>	Port <input style="width: 100px;" type="text" value="5060"/>
<input type="checkbox"/> No Disturb	<input type="checkbox"/> Ban Outgoing		
<input checked="" type="checkbox"/> Enable Call Transfer	<input checked="" type="checkbox"/> Enable Call Waiting		
<input checked="" type="checkbox"/> Enable Three Way Call	<input checked="" type="checkbox"/> Accept Any Call		
<input type="checkbox"/> Auto Answer	<input type="checkbox"/> Enable Voice Record		
<input type="checkbox"/> User-Defined Voice	<input checked="" type="checkbox"/> Incoming Record Playing		
<input style="width: 50px;" type="text" value="20"/> No Answer Time(seconds)			

AT530 provides record function. With this function, user may record three VoIP message and one local message.

Active answering machine:

Select “**Enable Voice Record**” to active answering machine, and config **No Answer Time**. If there is an incoming call and no one answer the call. After timeout, AT530 will auto answer this call and ask the caller to leave message.

Incoming Record Playing: play the message when recording.

User-Defined Voice: Use customizes greeting voice for answering machine.

Notice: AT530 supports three message maximum, each message can be 90 seconds. Answering will be deactivated if the message numbers is 3.

Record local message:

User may use local message to leave message to other local users.

Please refer the **Record** button function as below:

Record Function		
Level1	Level2	Description
Received	New	New message info
	Old	Old message info
	Record	Enable/disable answering machine
	Playing	Enable/disable Incoming Record Playing
Local	Play	Play local message
	Rec	Record local message
User define	Switch	Enable/disable customize greeting message
	Play	Play customize greeting message
	Rec	Record customize greeting message

9.1.8 How to use set the IP type via keypad?

In the idle mode, user may use the keypad to set the IP type as the below procedure:

Keep pressing the button 1 for changing to static mode.

Keep pressing the button 2 for changing to DHCP mode.

Keep pressing the button 3 for changing to PPPoE mode.

9.1.9 VLAN implement

AT530 support rich 802.1Q/P protocol and Diffserv configuration. Through its flexible VLAN function, you can set the voice/signaling and data packets in different VLAN via different VLAN id.

Different implement of VLAN function:

1: if “Data/Voice VLAN differentiated” is undifferentiated. Device will set the same vlan ID for voice and data. As show below

QoS Configuration

<

<input type="checkbox"/> VLAN Enable			
<input checked="" type="checkbox"/> VLAN ID Check Enable		Voice/Data VLAN differentiated	Undifferentiated ▼
<input checked="" type="checkbox"/> DiffServ Enable		DiffServ Value	0x b8
Voice VLAN ID	256 (0 - 4095)	Data VLAN ID	254 (0 - 4095)
Voice 802.1P Priority	0 (0 - 7)	Data 802.1P Priority	0 (0 - 7)

Or

QoS Configuration

<

<input checked="" type="checkbox"/> VLAN Enable			
<input type="checkbox"/> VLAN ID Check Enable		Voice/Data VLAN differentiated	Undifferentiated ▼
<input checked="" type="checkbox"/> DiffServ Enable		DiffServ Value	0x b8
Voice VLAN ID	256 (0 - 4095)	Data VLAN ID	254 (0 - 4095)
Voice 802.1P Priority	0 (0 - 7)	Data 802.1P Priority	0 (0 - 7)

2. if “Data/Voice VLAN differentiated” is Tag differentiated but the DiffServ is disable. Device won’t distinguish the voice, signaling and data stream. It will add the same data vlan id to them. As below:

QoS Configuration

<

<input checked="" type="checkbox"/> VLAN Enable			
<input type="checkbox"/> VLAN ID Check Enable		Voice/Data VLAN differentiated	Tag differentiated ▼
<input type="checkbox"/> DiffServ Enable		DiffServ Value	0x b8
Voice VLAN ID	256 (0 - 4095)	Data VLAN ID	254 (0 - 4095)
Voice 802.1P Priority	0 (0 - 7)	Data 802.1P Priority	0 (0 - 7)

Or

QoS Configuration

<

<input checked="" type="checkbox"/> VLAN Enable			
<input checked="" type="checkbox"/> VLAN ID Check Enable	Voice/Data VLAN differentiated	Tag differentiated ▼	
<input type="checkbox"/> DiffServ Enable	DiffServ Value	0x b8	
Voice VLAN ID	256 (0 - 4095)	Data VLAN ID	254 (0 - 4095)
Voice 802.1P Priority	0 (0 - 7)	Data 802.1P Priority	0 (0 - 7)

3. if “Data/Voice VLAN differentiated” is Tag differentiated and diffServ are both enable. Then device will distinguish the voice, signaling and data stream to VLAN ID setting. As below:

QoS Configuration

<

<input checked="" type="checkbox"/> VLAN Enable			
<input checked="" type="checkbox"/> VLAN ID Check Enable	Voice/Data VLAN differentiated	Tag differentiated ▼	
<input checked="" type="checkbox"/> DiffServ Enable	DiffServ Value	0x b8	
Voice VLAN ID	256 (0 - 4095)	Data VLAN ID	254 (0 - 4095)
Voice 802.1P Priority	0 (0 - 7)	Data 802.1P Priority	0 (0 - 7)

Or

QoS Configuration

<

<input checked="" type="checkbox"/> VLAN Enable			
<input type="checkbox"/> VLAN ID Check Enable	Voice/Data VLAN differentiated	Tag differentiated ▼	
<input checked="" type="checkbox"/> DiffServ Enable	DiffServ Value	0x b8	
Voice VLAN ID	256 (0 - 4095)	Data VLAN ID	254 (0 - 4095)
Voice 802.1P Priority	0 (0 - 7)	Data 802.1P Priority	0 (0 - 7)

4. if “Data/Voice VLAN differentiated” is Data untagged and diffServ are both enable. Then device will undistinguish the data to VLAN ID setting. As below:

QoS Configuration

<


<input checked="" type="checkbox"/> VLAN Enable			
<input type="checkbox"/> VLAN ID Check Enable		Voice/Data VLAN differentiated	data Untaged
<input checked="" type="checkbox"/> DiffServ Enable		DiffServ Value	0x b8
Voice VLAN ID	256 (0 - 4095)	Data VLAN ID	254 (0 - 4095)
Voice 802.1P Priority	0 (0 - 7)	Data 802.1P Priority	0 (0 - 7)

5. if VLAN is disable. Device won't add any vlan ID to the stream. In this case, if the Diffserv is enable, the DiffServ value response to the voice/signaling stream.

6. When VLAN function is enable. If "VLAN ID check" is enable, AT530 will have strict requirement on the VLAN, it won't handle any packets with different VLAN ID. If "VLAN ID check" is disable, AT530 will handle the packets even from different vlan ID. Please notice that VLAN ID check is enable in default.

9.1.10 How to connect RJ9 headset to AT-530

The AT-530 slot is compatible with the normal RJ9 headset. To connect a RJ9 headset, you have to remove pull out the original handset and connect the RJ9 headset to the same slot. Pin order for RJ9 headset.

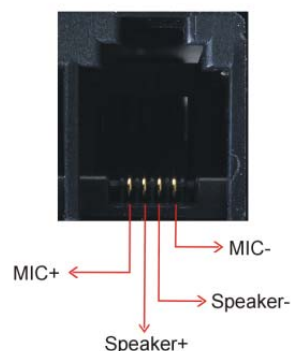

To make sure you can use the "Speaker" button to answer and hungup call in the headset mode. You need to go to "Audio Setting Page" and select "disable the hands free".