Graf cut®

GUILLOTINES

making cut easy

www.grafcutters.com

Graf cut®

We are proud to present latest models of GRAFCUT paper cutters and share with you our over 30 years manufacturing experience. Most of our production processes are done in house and allow us to keep high quality and trouble-free operation that you expect.

We follow the market trends and offer compact, automated and durable products which serve our customers for years. The development of product range is our constant job and we do offer customized solutions, exactly as needed by our partners. We take care about safety of operators and our machines meet all UE safety requirements which is confirmed by CE certificate.
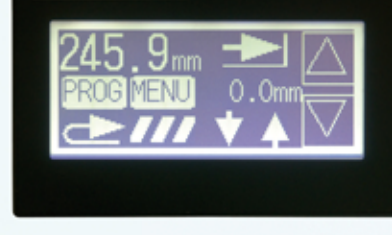
Designed to meet digital printers requirements.

TYPE: 53

- user-friendly, fully programmable touch screen with 100 jobs memory
- high cutting accuracy 0,1 mm of max paper stack 60mm
- 25 mm smallest cut (40mm false clamp- standard equipment)
- photocell curtain protection
- stainless steel tables are standard. Side tables working area extension as option.

PROGRAMMABLE TOUCH SCREEN

Sturdy and cost-effective solution for professional users.   Graf cut®

TYPE: 73

TYPE: 73H

- 2 options: mechanical drive for knife and clamp (type 73) or fully hydraulic (type 73H)
- programmable touch screens with customized software and 100 jobs memory
- High cutting accuracy 0,1 mm of max paper stack 80 mm (100mm type 73H)
- 30 mm smallest cut (60 mm false clamp- standard equipment)
- photocell safety curtain protection
- stainless steel tables and side tables are standard (optional air tables, activated via screen)

PROGRAMMABLE TOUCH SCREENS

5,7" (G73 only)

8,4" (G73 or G73H)

www.grafcutters.com

TECHNICAL DATA	GRAFCUT 53	GRAFCUT 73	GRAFCUT 73H
Cutting width	530 mm	730 mm	730 mm
Cutting depth	520 mm	720 mm	720 mm
Cutting height	60 mm	80 mm	100 mm
Blade drive	Mechanical	Mechanical	Hydraulic
Clamp drive	Mechanical (electronically adjustable)	Mechanical	Hydraulic (variable 300-2000kg)
Backgauge	fully programmable via touch screen with accuracy 0,1 mm		
Foot clamp	No	Yes, mechanical	Yes, hydraulic low pressure
Program module	100 programs/100 steps in each, touch screen mm or inch, paper EJECT function, programming via cutting, business card cutting mode		
Smallest cut/false clamp	25/40mm	30/60 mm	30/60 mm
Air table with blower	No	Optional	Optional
Side tables	Optional each (350 x 400 mm)	Standard each (376 x 568 mm)	Standard each (376 x 658 mm)
Safety	IR safety curtain on the front table, transparent safety cover on the rear table, main switch, electronically controlled true two-hand operation, automatic blade and clamp return from every position		
Net weight	250 kg	510 kg	590 kg
Power supply*:	230V/50 Hz, 20A, 2 kW	400V/50 Hz, 3kW	400V/50 Hz, 3kW
Dimensions without side tables (length x depth x height)	825 x 1130 x 1260 mm	1045 x1590 x 1390 mm	1105 x 1690 x 1440 mm
Dimensions with side tables (length x depth x height)	1525 x 1170 x 1260 mm	1797 x 1666 x 1390 mm	1855 x 1760 x 1440 mm

*other voltages available   Specifications subject to change without notice.

OTHERS:
- manual backgauge positioning by crank
- cutting line indicator
- solid stainless steel tables
- high quality steel (HSS) blades
- tools, operation manuals, CE certificate

SALES OFFICE:
GRAFMASZ
Lopuszanska 53 ,02232 Warsaw, POLAND
PHONE: 0048 223983834

sales@grafcutters.com
www.grafcutters.com

LOCAL DEALER: