
Straddle Dart rev 7 — 12 V control and signal wiring (18 AWG)

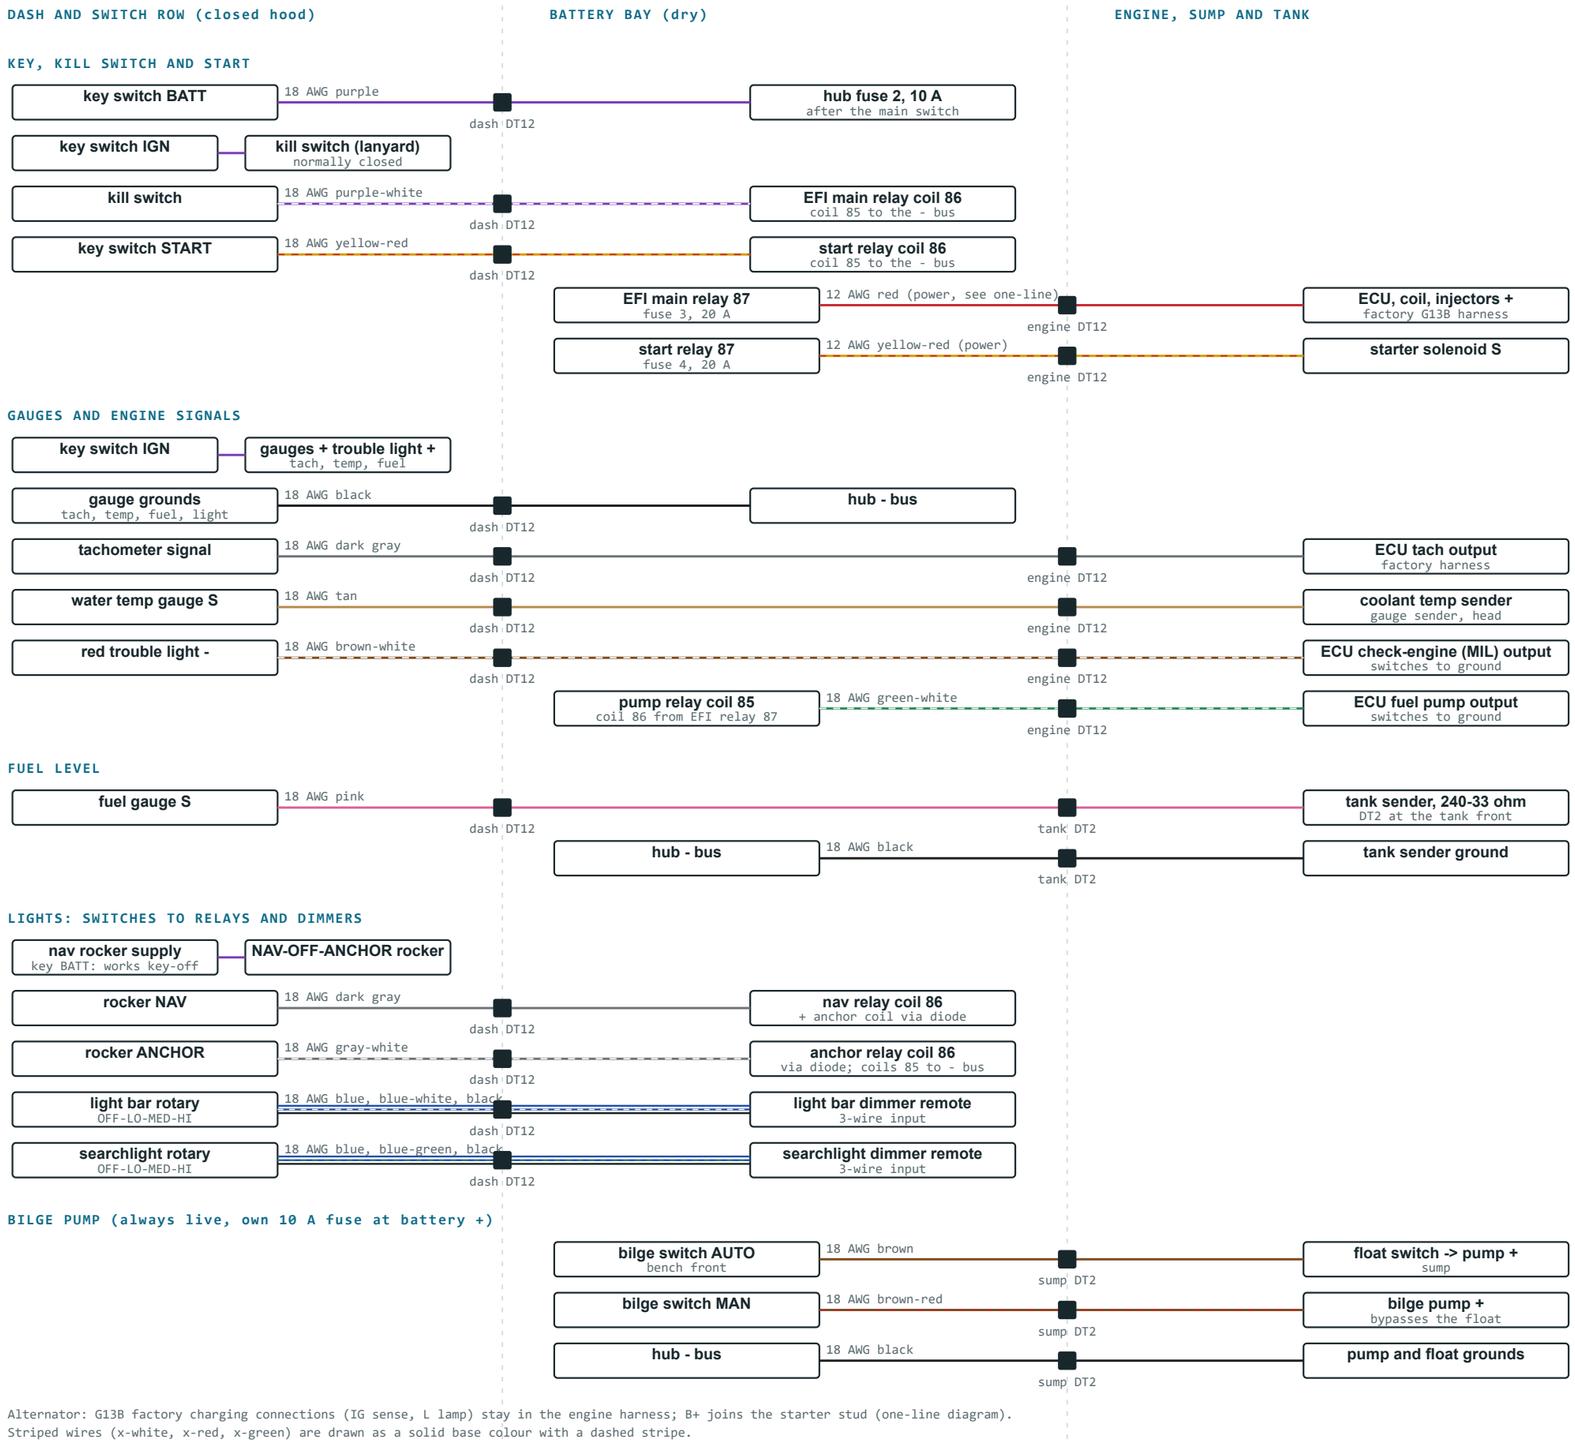

Alternator: G13B factory charging connections (IG sense, L lamp) stay in the engine harness; B+ joins the starter stud (one-line diagram).
Striped wires (x-white, x-red, x-green) are drawn as a solid base colour with a dashed stripe.