

APPLICATIONS / MARKETS













SPECIFICATIONS

Electrical Rating: 2A, 36VDC Mechanical Life: 1,000,000 Cycles Electrical Life: 200,000 Cycles Contact Resistance: 50mΩ Max. Insulation Resistance: 1000 M Ω Min. Dielectric Strength: 2,000VAC

Operating/Storage Temperature: -25°C to 55°C

Travel: 2.50mm

Moisture Protection: IP65

Contact Arrangement: SPST Off-(On)

Actuation Force: 5 N Panel Thickness: 1-5mm Mounting Nut Torque: 0.3Nm

FEATURES & BENEFITS

- Multiple actuator finish options
- Solder or screw termination options
- Raised or domed actuator options
- IP65 rated

PART NUMBER CONFIGURATOR

Series









Function





Body Finish Options



N - Nickel S - Polished Stainless 1 - Black Anodized

Actuator **Finish Options**



1 - Black

2 - White 6 - Yellow

7 - Blue

8 - Green 9 - Red N - Nickel

S - Polished Stainless

Material **Options**

Contact


NONE - Silver G - Gold


*(ON) Denotes function is momentary


Specifications subject to change without notice


BODY DIMENSIONS - FLATS


SOLDER TERMINATION















SCREW TERMINATION









10.60 [.417 in]










BODY DIMENSIONS - NICKEL, BLACK ANODIZED OR STAINLESS


SOLDER TERMINATION







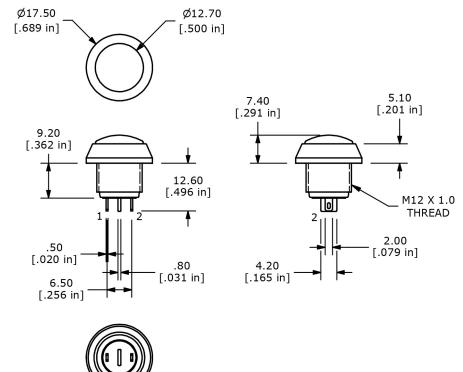

SCREW TERMINATION





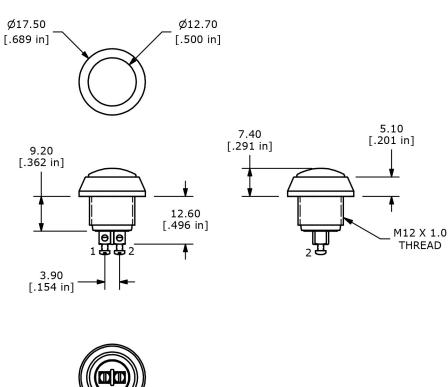





www.e-switch.com


ACTUATOR OPTIONS


NICKEL OR STAINLESS






DOMED ACTUATOR







Raised Actuator


BLACK, WHITE, YELLOW, BLUE, GREEN OR RED





DOMED ACTUATOR





RAISED ACTUATOR