



◆ Installation

1、Name of installation parts

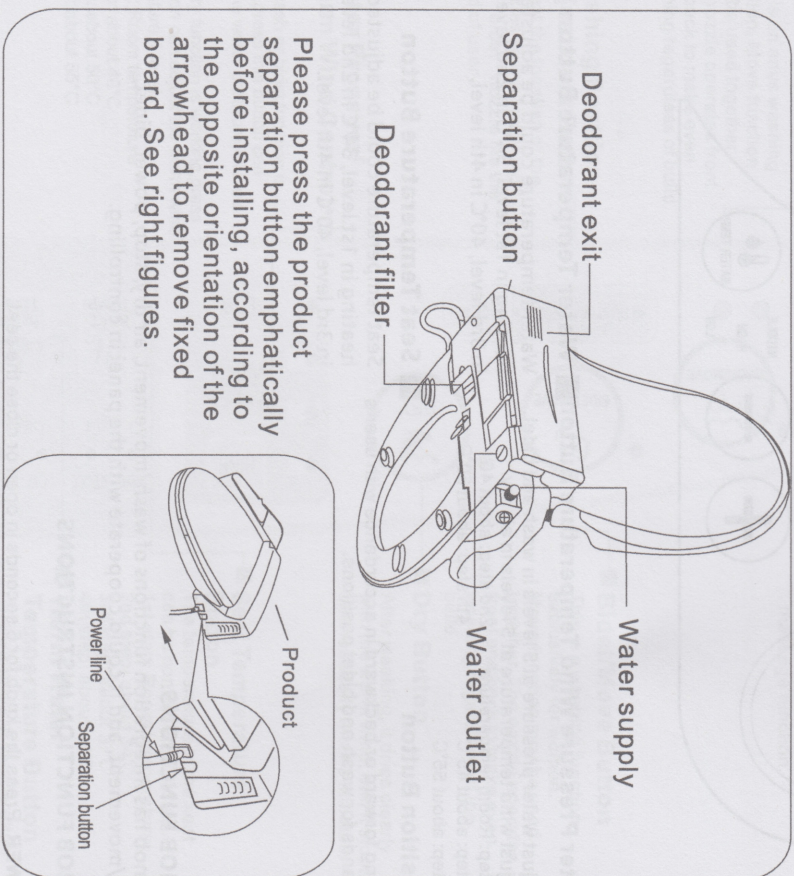

2、Check the toilet bowl size.




The model should be selected according to the following table.

Model(fig.2)	A	B	C	D	E
Elongated	≥ 25	525~545	100~180	≥ 300	≥ 220
Standard	≥ 25	495~515	100~180	≥ 300	≥ 220

3、Remove the existing toilet seat and lid.

Unfasten the nuts and remove the toilet seat and lid with proper tools.(if necessary).
(See below figures..)

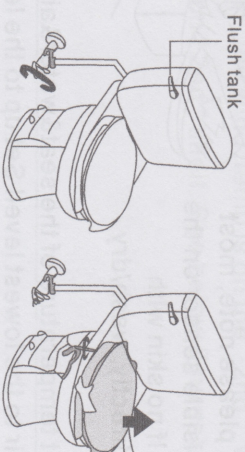

4、Connecting the water supply. Turn off the the valve,connecting the T-valve / Bidet hose/Toilet hose. (See below figures.)

