


10-Port Gigabit Ethernet Switch

2x1000M SFP ports + 8x10/100/1000M RJ45 ports



S200-10GPM-S2-AC

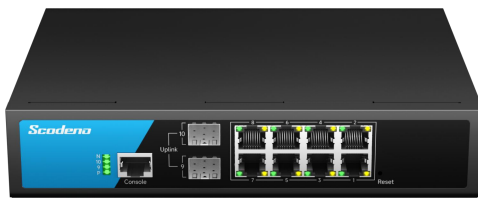

Multiple management methods



Non-blocking, low delay design



Rich in L2/L3 features



Strong security policy and strategy



Eco-friendly and energy-saving



| Product Overview

The S200 series of management switches adopts low power consumption design, which meets the requirements of green environmental protection and energy saving; Rich L2/L3 functional features to meet different business requirements; Powerful security policies and rich security features ensure network security; The management platform is simple and easy to use, greatly facilitating the operation and maintenance methods of management personnel.

| Key Features

- Supports IEEE 802.3 af/at, PoE management, and PoE Watchdog;
- 6kV port lightning protection;
- ESD: contact 8kV, air 15kV;
- -10~50°C wide operating temperature range;
- Support static routing function;
- Support L2 management functions such as VLAN, LLDP, LACP etc.;
- Support rich security features such as 802.1X, AAA, Port Security, DHCP Snooping, Port Isolation, DAI etc.;
- Support Telnet/SSH, SNMP, WEB UI, CLI.

| Hardware Features

Model	S200-10GPM-S2-AC
Interface	2*1000M SFP ports+8*10/100/1000M RJ45 ports
Switching Capacity	20Gbps
Packets Forwarding Rate	14.88Mpps
MAC	8K
Port Buffer	4.1M
Transfer Delay	<10us
Power Supply	AC 100-240V 50/60Hz
	Empty Load Power: <10W
LED Indicators	PWR, Link/ACTLED
PoE	1-8 ports support PoE
	IEEE 802.3 af/at standards
	PoE power:120W
	PIN Sequence: 1,2+/3,6-

Model	S200-10GPM-S2-AC
Environment	Working Temperature: -10°C ~ 50°C
	Storage Temperature: -40°C ~ 70°C
	Working Humidity: 10%~95% non-condensing
	Storage Humidity: 10%~95% non-condensing
Size(W*D*H)	220*161*44mm
Weight	0.97KG
EMC	Power Surge Protection: 6kV/2kV
	Ethernet Port Surge Protection: 4kV/2kV
	Anti-static Interference: 8kV/15kV
	Free Drop: 0.5M
Certificate Compliance	CE/FCC/RoHS

| Software Specifications

Model	S200-10GPM-S2-AC
VLAN	Support 4K IEEE 802.3Q VLAN
	Support protocol VLAN
	Support MAC VLAN
	Support voice VLAN
	Support video VLAN
	Support GARP
LACP	Support IEEE 802.3ad
	Support static LACP
	Support dynamic LACP

Model	S200-10GPM-S2-AC
STP	Support IEEE 802.1d STP
	Support IEEE 802.1w RSTP
	Support IEEE 802.1s MSTP
	Spanning Tree BPDU Filtering
	Spanning Tree BPDU Guard
	Spanning Tree Edge Port
LLDP	Support IEEE 802.1ab protocol
ERPS	Support ITUT G.8032 protocol
Port	Support Jumbo Frame
	Support IEEE802.3X Flow Control
	Support port statistics
	Support Auto-MDI/MDIX
Multicast	Support IGMP Snooping
	Support MLD Snooping
	Support MVR
ACL	Support MAC Standard/Extended ACL
	Support IPv4 Standard/Extended ACL
	Support IPv6 Standard/Extended ACL
QoS	Support QoS Re-marking
	Support Port Trust
	Support Port Rate Limiting
	Support Egress Queue Rate Limiting
	Support SP, WRR scheduling algorithms
	Support CoS, DSCP, IP Priority Mapping
DHCP	DHCP Interface Priority IP Binding
	Support DHCP Snooping
	Support DHCP Client
	Support DHCP Server

Model	S200-10GPM-S2-AC
L3 Route	IPv4 Management Address
	IPV6 Management Address
	Static IPv4 Route
	Static IPv6 Route
	ARP
	Loopback Interface
Security	SupportManagement Channel Configuration
	Support AAA
	Support IEEE802.1X
	Support MAC-Based IEEE802.1X
	Support WEB-Based IEEE802.1X
	Denial of Service Protection
	Dynamic ARP Inspection(DAI)
	IP Source Guard
	Port Security
	Port Isolation
DNS	Support DNS Client
	Support DNS Server
Diagnosis	Support Console Logs
	Support RAM logs
	Support Flash logs
	Support Port Mirroring(1:1,N:1)
	Support Ping
	Support Traceroute
	Support Cable Test
	Support UDLD protocol
	Support Optical Module Information

Model	S200-10GPM-S2-AC
Management	Support User Management
	Support System Log
	Support Firmware Upgrade
	Support File Upgrade
	Support SNMP
	Support WEB Management
	Support Console
	Support CLI
	Support Telnet/SSH
	Support Sntp Client
	Support RMON
EEE	Support IEEE802.3az

| Product Dimensions

