

S200-20GCPM-B2C4-ACR

Managed POE Switch

Input Voltage: AC 100~240V/50-60HZ

Operating Temperature: -10 °C ~ +50 °C

Cooling method: Fan cooling

Inspection report: CE/FCC/RoHS

Anti-static: 8KV-15KV

MTBF: 100000 hours




Product Description



S200-20GCM-B2C4-ACR three-layer managed switch (supports PoE function), equipped with 16 10/100/1000Mbps adaptive RJ45 ports and 4 optical-electrical multiplexing interfaces. Each RJ45 port supports automatic crossover and line-speed forwarding functions. Ports 1-16 can support PoE power supply, complying with IEEE802.3af/at standards, can act as a Power over Ethernet (PoE) device, automatically detecting and identifying compliant powered devices, and supplying power through the network cable. Utilizing a store-and-forward method combined with QoS technology, it ensures effective bandwidth allocation to each port, providing stable and reliable power and data transmission for high-power APs, network cameras, PTZ network dome cameras, PoE lighting, and other security monitoring devices.

Product dimensions

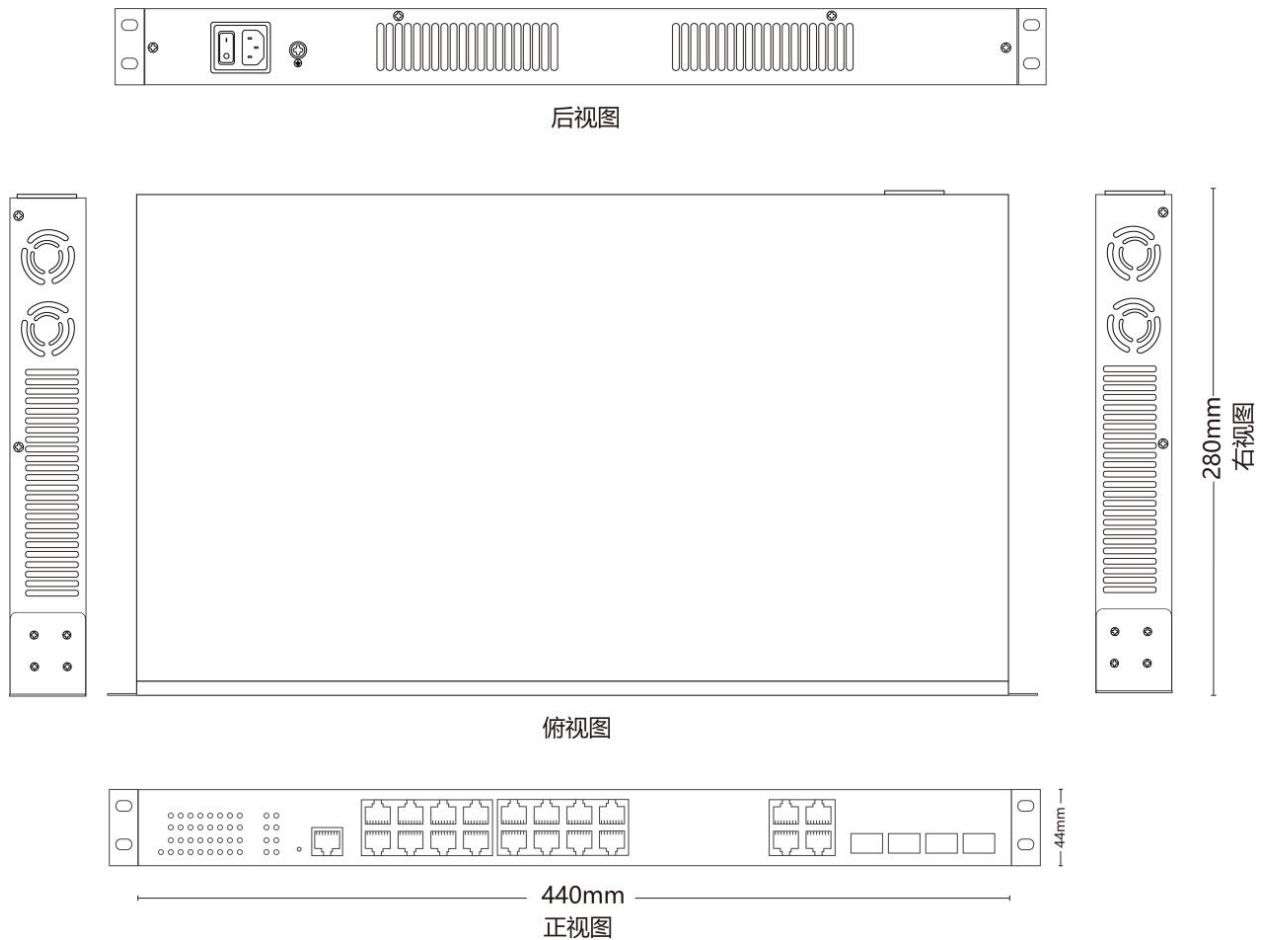

Product parameters

Interface (Provider Mode Ports)

Service interface (Fixed port)	4*1000 Combo+16*10/100/1000 Base - T
Management interface (Management Port)	Supports console
Power interface	AC interface
LED Lights (LED Indicators)	PWR, SYS, Link/ACT LED

Cable type & Transmission distance

Twisted-pair	0-100m (CAT5e, CAT6)
Monomode optical fiber	20/40/60/80/100KM
Multimode optical fibre	550m

Network Topology

Ring topology	Support
Star topology	Support
Bus topology	Support
Tree Topology	Support
Hybrid topology	Support

Electrical Specifications

Input voltage	AC 100-240V 50/60Hz
Total Power consumption	≤300W
Main board power	<20W

PoE Support (PoE Support) optional

PoE port (PoE port)	3-16
PoE Protocol (PoE Protocol)	802.3af, 802.3at
Pin Assignment (Pin Assignment)	1,2+;3,6-
PoE Management (PoE Management)	Support

PoE++ Support (PoE Support) optional

PoE port (PoE port)	1-2(90W)
PoE Protocol (PoE Protocol)	802.3af, 802.3at, 802.3BT
Pin Assignment (Pin Assignment)	1,2,4,5+;3,6,7,8-
PoE Management (PoE Management)	Support

Layer 2 Switching

Switching capacity	56Gbps
Packet forwarding rate	29.76Mpps
MAC address table	8K
Buffer	4.1M
Forwarding delay	<10us
Polarity reversal (MDI/MDIX)	Support
VLAN support and quantity (VLAN)	256
GARP VLAN Registration Protocol (GVRP)	Support
Protocol VLAN	Support
Voice VLAN	Support
Video VLAN (Surveillance VLAN)	Support
MAC VLAN	Support
Ethernet channel / Link Aggregation (Ethernet channel/	Support

802 .3ad)	
Link Aggregation Control Protocol (LACP)	Support
Interface Speed	Support
Duplex Mode	Support
Flow Control	Support
Jumbo frame	Support
DHCP Client	Support
SNTP Client	Support
Port Statistics	Support
Protected Ports	Support
Energy Efficient Ethernet (EEE)	Support
Ethernet Ring Protection Switching (ERPS)	Support
Link Layer Discovery Protocol (LLDP)	Support
LLDP 802.1 Type-Length-Value (LLDP 802.1 TLV)	Support
Multiple Spanning Tree / Rapid Spanning Tree / Spanning Tree (MSTP / RSTP / STP)	Support
Spanning Tree BPDU Filter	Support
Spanning Tree BPDU Guard	Support
Spanning Tree Port Fast	Support
IGMP Snooping	Support
MLD Snooping	Support
MVR	Support
DHCP Interface Priority IP Binding	Support
Device Scanning	Support

Layer 3 Function (Layer 3 Route)

IPv4 Management Address	Support
IPv6 Management Address	Support
Static IPv4 Routes	Supports 32 Entries
Static Routes IPv6	Supports 32 Entries
Address Resolution Protocol (ARP)	Support
Loopback Interface	Support
DHCP Server	Support
DNS Server	Support
DNS Client	Support

Convergence

Access Control List (ACL)	Supports MAC Standard/Extended ACL
----------------------------------	------------------------------------

Quality of Service (QoS)	Supports IPv4 Standard/Extended ACL
	Supports IPv6 Standard/Extended ACL
	Support for QoS re-tagging
	Support for port trust
	Support for port rate limiting
	Support for egress queue rate limiting
	Support for SP, WRR scheduling algorithms
	Support for COS mapping, DSCP mapping, IP priority mapping

Management Functions

User Management	Support
System Log	Support
Firmware Upgrade (UpgradeFirmware)	Support
File Upgrade (ConfigurationFileDownload/Upload)	Support
SNMP	Supports SNMP V1/V2/V3
WEB Management	Support
Manage Serial Port (Console)	Support
Command Line (CLI)	Support
Telnet/SSH	Support
RMON	Support

Security

Management Channel Configuration	Support
AAA Authentication	Support
802.1X Authentication	Support
MAC-Based Authentication	Support
WEB-Based Authentication	Support
DoS Attack Prevention	Support
Dynamic ARP Inspection	Support
DHCP Snooping	Support
IP Source Guard	Support
Port Security	Support
Protected Ports	Support
Storm Control	Support

Equipment diagnosis

Console log	Support
RAM log	Support

Flash log	Support
Port mirroring	Supports 1:1 or M:1
Ping	Support
Traceroute	Support
Electrical port test	Support
Optical module information	Support
UDLD protocol	Support

Environment

Operating temperature	-10°C ~ +50°C
Storage temperature	-40°C ~ +70°C
Relative humidity	10% to 90% RH
Thermal methods	Fan cooling
MTBF	100,000 hours

Mechanical Dimensions

Product size	440*280*44mm
Installation Method	Rack-mounted installation
Weight	3.4KG

EMC & INGRESS PROTECTION

Surge protection of Power	Common mode 4KV, differential mode 2KV
Surge protection of Ethernet port	Common mode 6KV, differential mode 2KV
Electrostatic discharge (ESD)	Contact 8K, air 15K
Free fall	0.5m

Authentication

Authentication	Ministry of Public Security, Ministry of Industry and Information Technology inspection report and network access license, CE/FCC/RoHS
-----------------------	--

Accessories

Accessories	Equipment, power cord, certificate of conformity, manual, dust plug
--------------------	---