

S200-26GTCP-GC-ACR Unmanaged POE Switch

Input Voltage: AC 100~240V/50-60HZ Operating Temperature: -10°C ~ +50

Cooling Method: Fanless design, natural cooling Inspection Report: CE/

FCC/RoHS

Electrostatic protection: 8KV-15KV

MTBF: 100000 hours




Product Description



S200-26GTCP-GC-ACR Unmanaged Gigabit Switch (supports PoE function), featuring 24 10/100Mbps adaptive RJ45 ports and 1 10/100/1000M uplink RJ45 port + 1 Gigabit optical-electrical multiplex uplink port. Each RJ45 port supports auto-negotiation and line-speed forwarding. Ports 1-24 support IEEE802.3AF/AT standard PoE power supply, can act as a Power over Ethernet (PoE) device, automatically detecting and identifying compliant powered devices, and supplying power through the network cable, providing stable and reliable data transmission.

Product dimensions

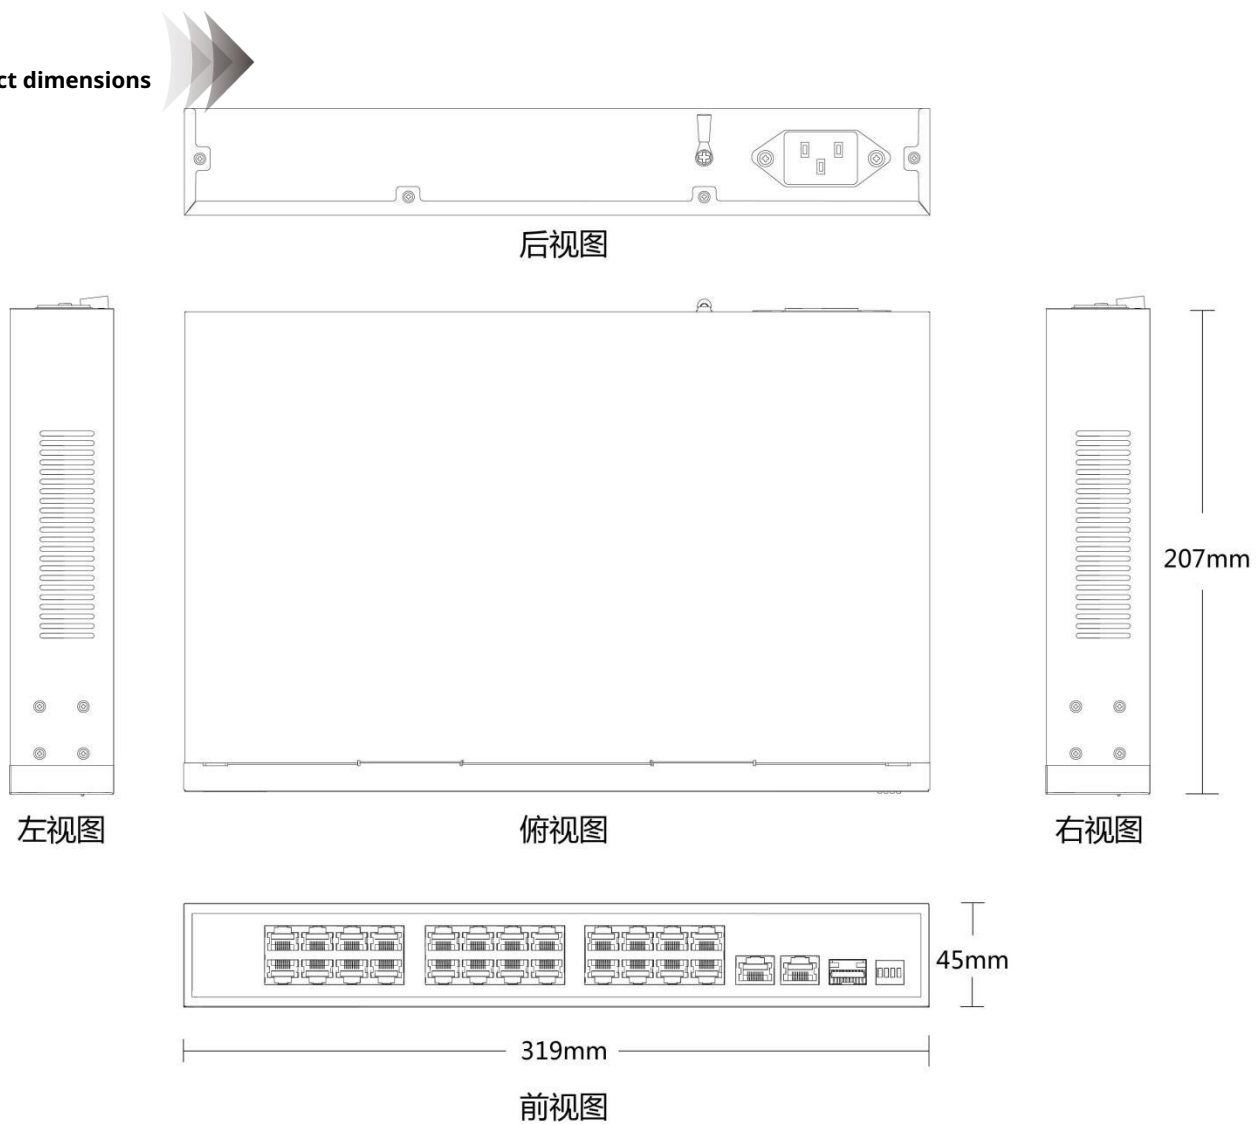

Product parameters

Interface (Provider Mode Ports)

Service interface (Fixed port)	1*1000Combo+1*10/100/1000Base - T + 24*10/100Base - TX
Power interface	
LED indicators	PWR
Optical fiber interface	SFP

Cable type&Transmission distance

Twisted-pair	0-100m (CAT5e, CAT6)
Monomode optical fiber	20/40/60/80/100KM
Multimode optical fibre	550M

Network Topology

Ring topology	
Star topology	Supported
Bus topology	Supported
Tree Topology	Supported

Electrical Specifications

Input voltage	AC 100-240V 50/60Hz
Total Power consumption	≤300W
Main board power	<10W

PoE Support

	802.3AF, 802.3AT
	1,2+/3,6-
	1-24

Dialing Function

1	
2	
3	Port Isolation
4	

Layer 2 Switching

Switching capacity	8.8G
Packet forwarding rate	6.547Mpps
MAC address table	8K
Buffer	4M
Forwarding delay	<10us
MDI/MDIX	Supported
Jumbo Frame	supports 9K bytes
StormControl	Supported

Environment

Operating temperature	-10°C~+50°C
Storage temperature	-40°C~+70°C
Relative humidity	5%~95% non-condensing
Thermal methods	Fanless design, natural cooling
MTBF	100,000 hours

Mechanical Dimensions

Product size	319*207*45mm
Installation Method	
Weight	1.75KG

EMC & INGRESS PROTECTION

Surge protection of Power	
Surge protection of Ethernet port	
Electrostatic discharge (ESD)	Contact 8K, air 15K
Free fall	0.5m

Accessories

Accessories	
-------------	--

Optional model

S200-26GTCP-GC-AC	1 Gigabit Combo port, 1 Gigabit electrical port, 24 POE electrical ports (150W power supply, narrow voltage AC220V)
S200-26GTCP-GC-AC	1 Gigabit Combo port, 1 Gigabit electrical port, 24 POE electrical ports (150W power supply, wide voltage AC100~240V)
S200-26GTCP-GC-AC	1 Gigabit Combo port, 1 Gigabit electrical port, 24 POE electrical ports (300W power supply, narrow voltage AC220V)
S200-26GTCP-GC-AC	1 Gigabit Combo port, 1 Gigabit electrical port, 24 POE electrical ports (300W power supply, wide voltage AC100~240V)
S200-26GTCP-GC-AC	1 Gigabit Combo port, 1 Gigabit electrical port, 24 POE electrical ports (400W power supply, wide voltage AC100~240V)