

S200-28GCPM-B2C4-ACR

Managed POE Switch

Input Voltage: AC 100~240V/50-60HZ

Operating Temperature: -10 °C ~ +50 °C

Cooling method: Fan cooling

Inspection report: CE/FCC/RoHS

Anti-static: 8KV-15KV

MTBF: 100,000 hours



Product Description




S200-28GCPM-B2C4-ACR three-layer managed switch, featuring 24 10/100/1000Mbps

adaptive RJ45 ports and 4 optical-electrical multiplexing interfaces, where ports 1-24 support POE, and ports 25-28 are uplink interfaces.

Each RJ45 port supports auto-flip and line-speed forwarding functions. It uses a store-and-forward method, combined with QoS technology, ensuring that bandwidth is effectively allocated to each port, providing stable and reliable power and data transmission.

Product Size

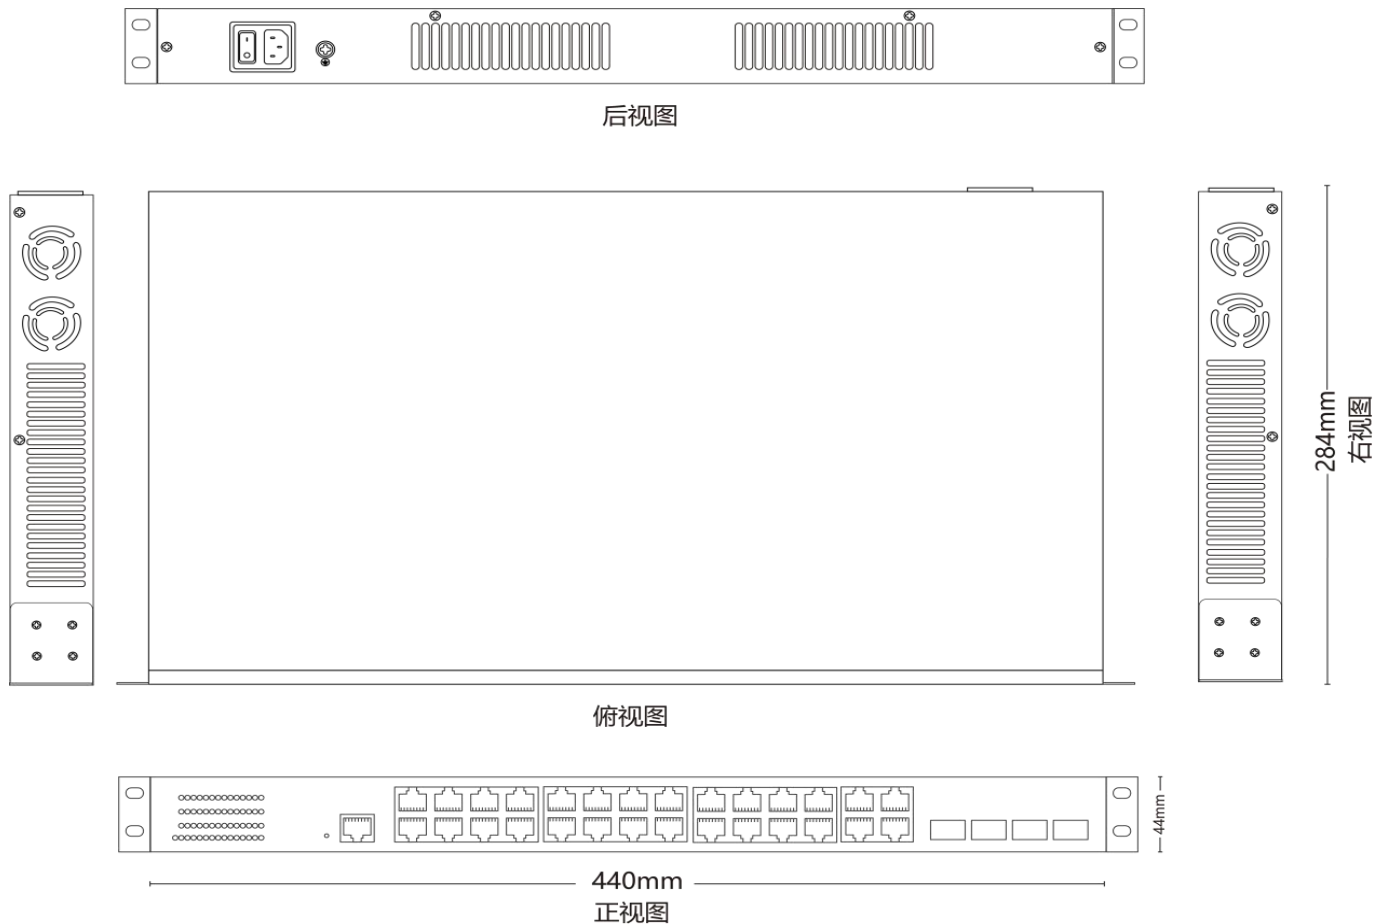

Product Parameters

Interface (Provider Mode Ports)

Service Interface (Fixed port)	4*1000 Combo+24*10/100/1000 Base-T
Management Interface (Management Port)	Supports console
Power Interface	
LED Indicators	PWR, SYS, Link/ACT LED

Cable type & Transmission distance

Twisted-pair	0-100m (CAT5e, CAT6)
Monomode optical fiber	20/40/60/80/100KM
Multimode optical fibre	550m

Network Topology

Ring topology	Supported
Star topology	Supported
Bus topology	Supported
Tree Topology	Supported
Hybrid topology	Supported

Electrical Specifications

input voltage	AC 100-240V 50/60Hz
Total Power consumption	≤400W
Main board power	<22W

PoE Support

PoE port	1-24
PoE Protocol	802.3af, 802.3at
Pin Assignment	1,2+;3,6-
PoE Management	Supported

PoE Support

PoE port	1-2(90W)
PoE Protocol	802.3af, 802.3at, 802.3BT
Pin Assignment	1,2,4,5+;3,6,7,8-
PoE Management	Supported

Layer 2 Switching

Switching capacity	56Gbps
Packet forwarding rate	41.616Mpps
MAC address table	8K
Buffer	4.1M
Forwarding delay	<10us
Polarity reversal (MDI/MDIX)	Supported
VLAN support and quantity (VLAN)	256
GARP VLAN Registration Protocol (GVRP)	Supported
Protocol VLAN	Supported
Voice VLAN	Supported
Video VLAN (Surveillance VLAN)	Supported
MAC VLAN	Supported
Ethernet channel / Link Aggregation (802.3ad)	Supported

Link Aggregation Control Protocol (LACP)	Supported
Interface Speed	Supported
Duplex Mode	Supported
Flow Control	Supported
Jumbo frame	Supported
DHCP Client	Supported
SNTP Client	Supported
Port Statistics	Supported
Protected Ports	Supported
Energy Efficient Ethernet (EEE)	Supported
Ethernet Ring Protection Switching (ERPS)	Supported
Link Layer Discovery Protocol (LLDP)	Supported
LLDP 802.1 Type-Length-Value (LLDP 802.1 TLV)	Supported
Multiple Spanning Tree / Rapid Spanning Tree / Spanning Tree (MSTP / RSTP / STP)	Supported
Spanning Tree BPDU Filter	Supported
Spanning Tree BPDU Guard	Supported
Spanning Tree Port Fast	Supported
IGMP Snooping	Supported
MLD Snooping	Supported
MVR	Supported
	Supported
	Supported

Layer 3 Function (Layer 3 Route)

	Supported
	Supported
Static Routes IPv4	
Static Routes IPv6	
Address Resolution Protocol (ARP)	Supported
Loopback Interface	Supported
DHCP Server	Supported
DNS Server	Supported
DNS Client	Supported

Convergence

Access Control List (ACL)	

Quality of Service (QoS)	
	Supports Port Trust
	Support COS mapping, DSCP mapping, and IP priority mapping

Management functions

User Management	Supported
System Log	Supported
Firmware Upgrade	Supported
File Upgrade (Configuration File Download/Upload)	Supported
SNMP	Support SNMP V1/V2/V3
	Supported
Manage Serial Port (Console)	Supported
Command Line (CLI)	Supported
Telnet/SSH	Supported
RMON	Supported

Security

	Supported
	Supported
	Supported
	Supported
	Supported
	Supported
	Supported
DHCP Snooping	Supported
IP Source Guard	Supported
Port Security	Supported
Protected Ports	Supported
Storm Control	Supported

Equipment Diagnosis

Console Log	Supported
RAM Log	Supported
Flash log	Supported

	Supports 1:1 or M:1
Ping	Supported
Traceroute	Supported
	Supported
	Supported
UDLD Protocol	Supported

Environment

Operating temperature	-10°C ~ +50°C
Storage temperature	-40°C ~ +70°C
Relative humidity	10% to 90% RH
Thermal methods	Fan cooling
MTBF	100,000 hours

Mechanical Structure (Mechanical Dimensions)

Dimensions (Product size)	440*284*44mm
Installation Method	
Weight	3.4KG

Protection (EMC & INGRESS PROTECTION)

Surge protection of Power	
Surge protection of Ethernet port	
Electrostatic discharge (ESD)	Contact 8K, Air 15K
Free fall	0.5m

Related authentication

Authentication	
-----------------------	--

Accessories

Accessories	
--------------------	--