

S200-28GCPM-C4-ACR

Managed POE Switch

Input Voltage: AC 100~240V/50-60HZ

Operating Temperature: -10 °C ~ +50 °C

Cooling Method: Fan Cooling

Inspection Report: CE/FCC/RoHS

ESD Protection: 8KV - 15KV

MTBF: 100,000 hours




Product Description



The S200-28GCPM-C4-ACR is a three-layer managed switch, featuring 24 10/100/1000Mbps adaptive RJ45 ports and 4 optical-electrical multiplexing interfaces, with ports 1-24 supporting POE and ports 25-28 serving as uplink interfaces. Each RJ45 port supports auto-negotiation and line-speed forwarding. Utilizing a store-and-forward method combined with QoS technology, it ensures effective bandwidth allocation to each port, providing stable and reliable power and data transmission.

Product Dimensions

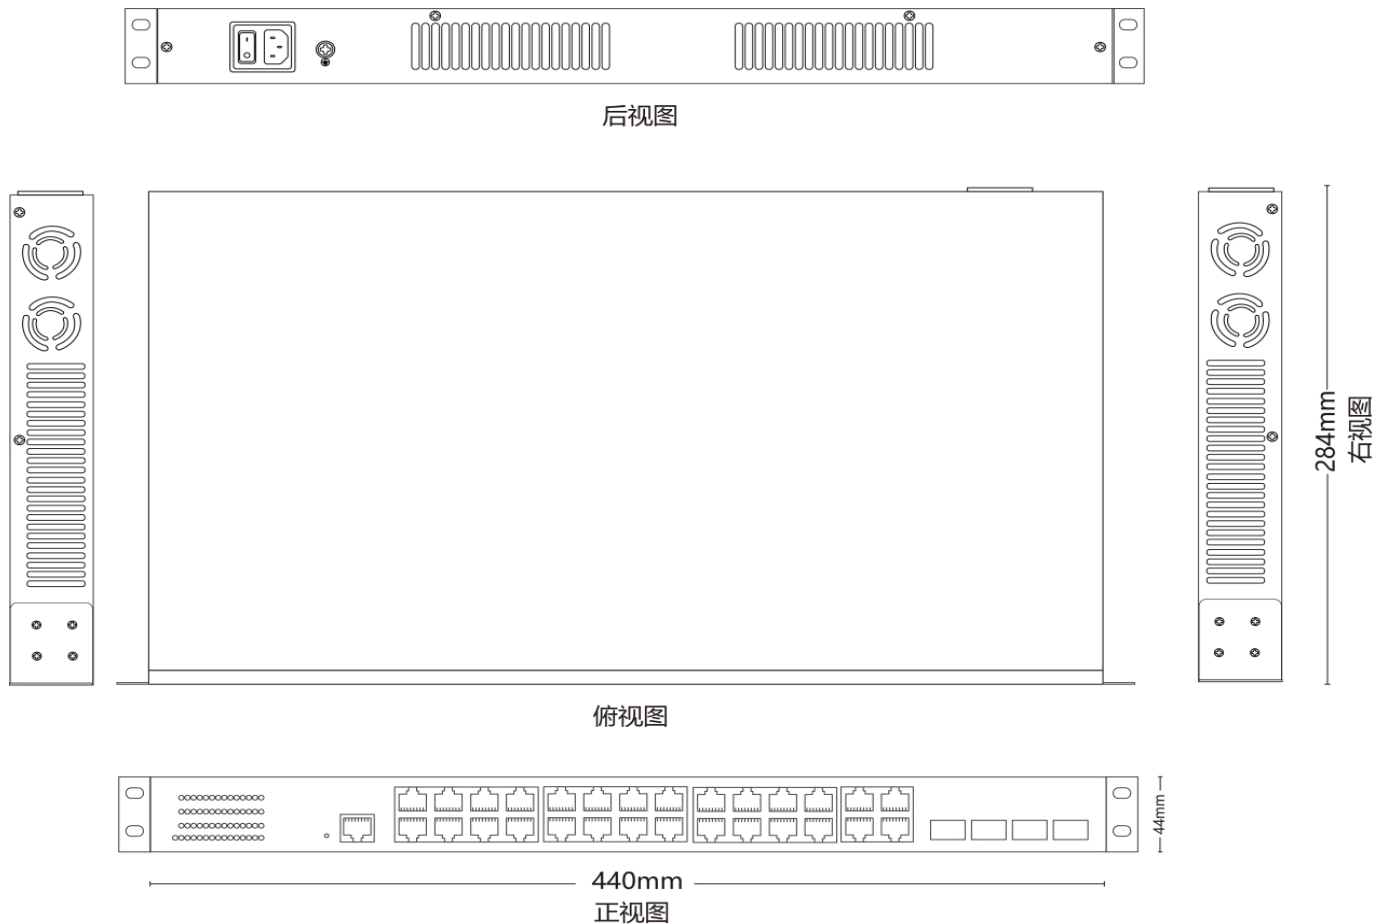

Product Parameters

Interface (Provider Mode Ports)

Service Interface (Fixed port)	4*1000 Combo+24*10/100/1000 Base - T
Management Interface (Management Port)	Supports console
Power Interface (Power interface)	
LED Indicators (LED Indicators)	PWR, SYS, Link/ACT LED

Cable type & Transmission distance

Twisted-pair	0-100m (CAT5e, CAT6)
Monomode optical fiber	20/40/60/80/100KM
Multimode optical fibre	550m

Network Topology

Ring topology	Support
Star topology	Support
Bus topology	Support
Tree Topology	Support
Hybrid topology	Support

Electrical Specifications

input voltage	AC 100-240V 50/60Hz
Total Power consumption	≤300W
Main board power	<20W

Optional PoE Support

PoE port	1-24
PoE Protocol	802.3af, 802.3at
Pin Assignment	1,2+;3,6-
PoE Management	Support

Layer 2 Switching

Switching capacity	56Gbps
Packet forwarding rate	41.616Mpps
MAC address table	8K
Buffer	4.1M
Forwarding delay	<10us
MDI/MDIX	Support
VLAN support and quantity	256
GARP VLAN Registration Protocol (GVRP)	Support
Protocol VLAN	Support
Voice VLAN	Support
Video VLAN (Surveillance VLAN)	Support
MAC VLAN	Support
Ethernet Channel / Link Aggregation (Ethernet channel/ 802.3ad)	Support
Link Aggregation Control Protocol (LACP)	Support
Interface Speed	Support
Duplex Mode	Support
Flow Control	Support
Jumbo frame	Support

DHCP Client	Support
SNTP Client	Support
Port Statistics	Support
Protected Ports	Support
Energy Efficient Ethernet (EEE)	Support
Ethernet Ring Protection Switching	Support
Link Layer Discovery Protocol (LLDP)	Support
LLDP 802.1 Type-Length-Value (LLDP 802.1 TLV)	Support
Multiple Spanning Tree / Rapid Spanning Tree / Spanning Tree (MSTP / RSTP / STP)	Support
Spanning Tree BPDU Filtering (STP BPDU Filter)	Support
Spanning Tree BPDU Protection (STP BPDU Guard)	Support
Spanning Tree Edge Port (STP Port Fast)	Support
IGMP Snooping	Support
MLD Snooping	Support
MVR	Support
	Support
	Support

Layer 3 Function (Layer 3 Route)

	Support
	Support
Static Routes IPv4	
Static Routes IPv6	
Address Resolution Protocol (ARP)	Support
Loopback Interface	Support
DHCP Server	Support
DNS Server	Support
DNS Client	Support

Convergence

Access Control List (ACL)	
Quality of Service (QoS)	

	Support for COS mapping, DSCP mapping, IP priority mapping

Management functions

User Management	Support
System Log	Support
Upgrade Firmware	Support
Configuration File Download/Upload	Support
SNMP	Support SNMP V1/V2/V3
	Support
Manage Console	Support
Command Line	Support
Telnet/SSH	Support
RMON	Support

Security

	Support
	Support
	Support
	Support
	Support
	Support
	Support
DHCP Snooping	Support
IP Source Guard	Support
Port Security	Support
Protected Ports	Support
Storm Control	Support

Equipment Diagnosis

Console Log	Support
RAM Log	Support
Flash Log	Support
	Supports 1:1 or M:1
Ping	Support
Traceroute	Support
	Support

	Support
UDLD Protocol	Support

Environmental Conditions

Operating temperature	-10°C ~ +50°C
Storage temperature	-40°C ~ +70°C
Relative humidity	10% to 90% RH
Thermal methods	Fan cooling
MTBF	100,000 hours

Mechanical Structure (Mechanical Dimensions)

Dimensions (Product Size)	440*284*44mm
Installation Method	Rack Mount
Weight	3.4KG

Protection (EMC & INGRESS PROTECTION)

Surge protection of Power	
Surge protection of Ethernet port	
	Contact 8K, air 15K
Free fall	0.5m

Authentication

Authentication	
----------------	--

Accessories

Accessories	
-------------	--