

S200-28XGM-X4-ACR

10 Gigabit Managed Switch

Input Voltage: AC 100~240V/50-60HZ

Operating Temperature: -10 °C ~ +50 °C

Cooling method: Fan cooling

Inspection report: CE/FCC/RoHS

Anti-static: 8KV-15KV

MTBF: 100,000 hours




Product Description



S200-28XGM-X4-ACR three-layer managed switch, featuring 24 10/100/1000Mbps adaptive RJ45 ports and 4 10Gb optical ports. Each RJ45 port supports auto-negotiation and line-speed forwarding. Utilizing a store-and-forward method combined with QoS technology, it ensures effective bandwidth allocation to each port, providing stable and reliable power and data transmission.

Product Size

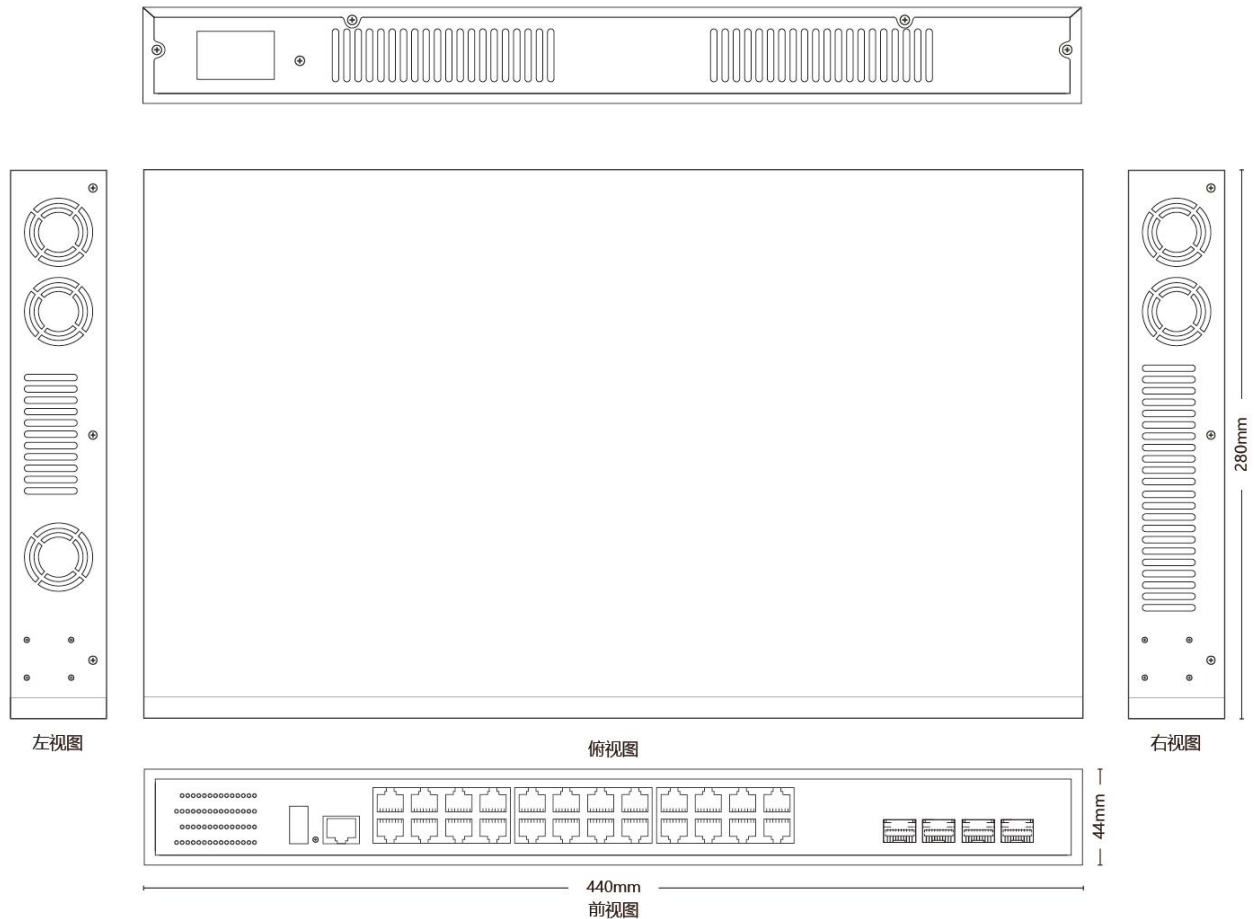

Product Parameters

Interface (Provider Mode Ports)

Service Interface (Fixed port)	4*10G Base-X + 24*10/100/1000 Base-T
Management Interface (Management Port)	Supports console
Power Interface (Power interface)	AC Interface
LED Indicators (LED灯)	PWR, SYS, Link/ACT LED

Cable type & Transmission distance

Twisted-pair	0-100m (CAT5e, CAT6)
Monomode optical fiber	20/40/60/80/100KM

Multimode optical fibre	550m
-------------------------	------

Network Topology

Ring topology	Support
Star topology	Support
Bus topology	Support
Tree Topology	Support
Hybrid topology	Support

Electrical Specifications

input voltage	AC 100-240V 50/60Hz
Total Power consumption	≤40W

Layer 2 Switching

Switching capacity	128G
Packet forwarding rate	95.23Mpps
MAC address table	16K
Buffer	12M bit
Forwarding delay	<10us
Polarity reversal (MDX/MIDX)	Support
VLAN support and quantity	4000
GARP VLAN Registration Protocol (GVRP)	Support
Protocol VLAN	Support
Voice VLAN	Support
Video VLAN (Surveillance VLAN)	Support
MAC VLAN	Support
Ethernet Channel / Link Aggregation (Ethernet channel/ 802 .3ad)	Support
Link Aggregation Control Protocol (LACP)	Support
Interface Speed	Support
Duplex Mode	Support
Flow Control	Support
Jumbo frame	Support
DHCP Server	Support
DNS Server	Support
DNS Client	Support
SNTP Client	Support
Port Statistics	Support

Protected Ports	Support
EEE (Energy Efficient Ethernet)	Support
Ethernet Ring Protection Switching (ERPS)	Support
Link Layer Discovery Protocol (LLDP)	Support
LLDP 802.1 Type-Length-Value (LLDP 802.1 TLV)	Support
Multiple Spanning Tree / Rapid Spanning Tree / Spanning Tree (MSTP / RSTP / STP)	Support
Spanning Tree BPDU Filter	Support
Spanning Tree BPDU Guard	Support
Spanning Tree Port Fast	Support
IGMP Snooping	Support
MLD Snooping	Support
MVR	Support
DHCP Interface Priority IP Binding	Support
Device Scanning	Support

Layer 3 Function

IPv4 Management Address	Support
IPv6 Management Address	Support
IPv4 Dynamic Routing	OSPF, RIP
Static Routes IPv6	Support
VRRP	Virtual Router Redundancy Protocol
Address Resolution Protocol (ARP)	Support
Loopback Interface	Support

Convergence

Access Control List (ACL)	Supports MAC Standard/Extended ACL
	Supports IPv4 Standard/Extended ACL
	Supports IPv6 Standard/Extended ACL
Quality of Service (QoS)	Supports QoS Re-marking
	Supports Port Trust
	Supports Port Rate Limiting
	Support export queue rate limiting
	Support SP, WRR scheduling algorithm
	Support COS mapping, DSCP mapping, IP priority mapping

Management Function

User Management	Support
------------------------	---------

System Log	Support
Upgrade Firmware	Support
Configuration File Download/Upload	Support
SNMP	Support SNMP V1/V2/V3
WEB Management	Support
Management Serial Port (Console)	Support
Command Line Interface (CLI)	Support
Telnet/SSH	Support
RMON	Support

Security

Management Channel Configuration	Support
AAA Authentication	Support
802.1X Authentication	Support
MAC-Based Authentication	Support
WEB-Based Authentication	Support
DoS Attack Prevention	Support
Dynamic ARP Inspection	Support
DHCP Snooping	Support
IP Source Guard	Support
Port Security	Support
Protected Ports	Support
Storm Control	Support

Equipment Diagnosis

Console Log	Support
RAM Log	Support
Flash Log	Support
Port Mirroring	Support 1:1 or 1:M
Ping	Support
Traceroute	Support
Electrical Port Test	Support
Optical Module Information	Support
UDLD Protocol	Support

Environmental Conditions (Environment)

Temperature (Temperature)	Operating Temperature: -10°C to 50°C Storage Temperature: -40°C to 75°C
----------------------------------	--

Relative humidity	Operating humidity: 10% to 90% RH Storage humidity: 5% to 90% RH
Thermal methods	Fan cooling
MTBF	100,000 hours

Mechanical Structure (Mechanical Dimensions)

Product size	440*280*44mm
Installation Method	Rack-mounted installation
Weight	3KG

Protection (EMC & INGRES PROTECTION)

Surge protection of Power	Common mode 4KV, differential mode 2KV
Surge protection of Ethernet port	Common mode 6KV, differential mode 2KV
Electrostatic discharge (ESD)	Contact 8K, air 15K
Free fall	0.5m

Accessories

Accessories	Equipment, power cord, ear hooks, ear hook screws, anti-static bag, certificate of conformity, instruction manual, dust plugs
-------------	---