



XPTN-9000-43-1FX1TX

Unmanaged Industrial Switch

Input Voltage:DC 12-58V

Operating Temperature:- 40 °C ~ + 75 °C

Enclosure:IP40 protection level, fanless design

Inspection Report:CE / FCC / RoHS

ESD Protection:8KV - 15KV


MTBF:100,000 hours

Product Description



This device is a 100M optical port & 1 10/100M self-adaptive Ethernet industrial fast switch, with optional POE. Through a fanless heat dissipation circuit design, wide operating temperature range, high protection level, and other technologies, it provides excellent industrial-grade quality such as high/low temperature resistance and lightning protection, enhancing the reliability and safety of industrial networks. It can better meet the deployment requirements in harsh environments such as rail transit, safe cities, intelligent transportation, outdoor monitoring, and more.

Product Dimensions

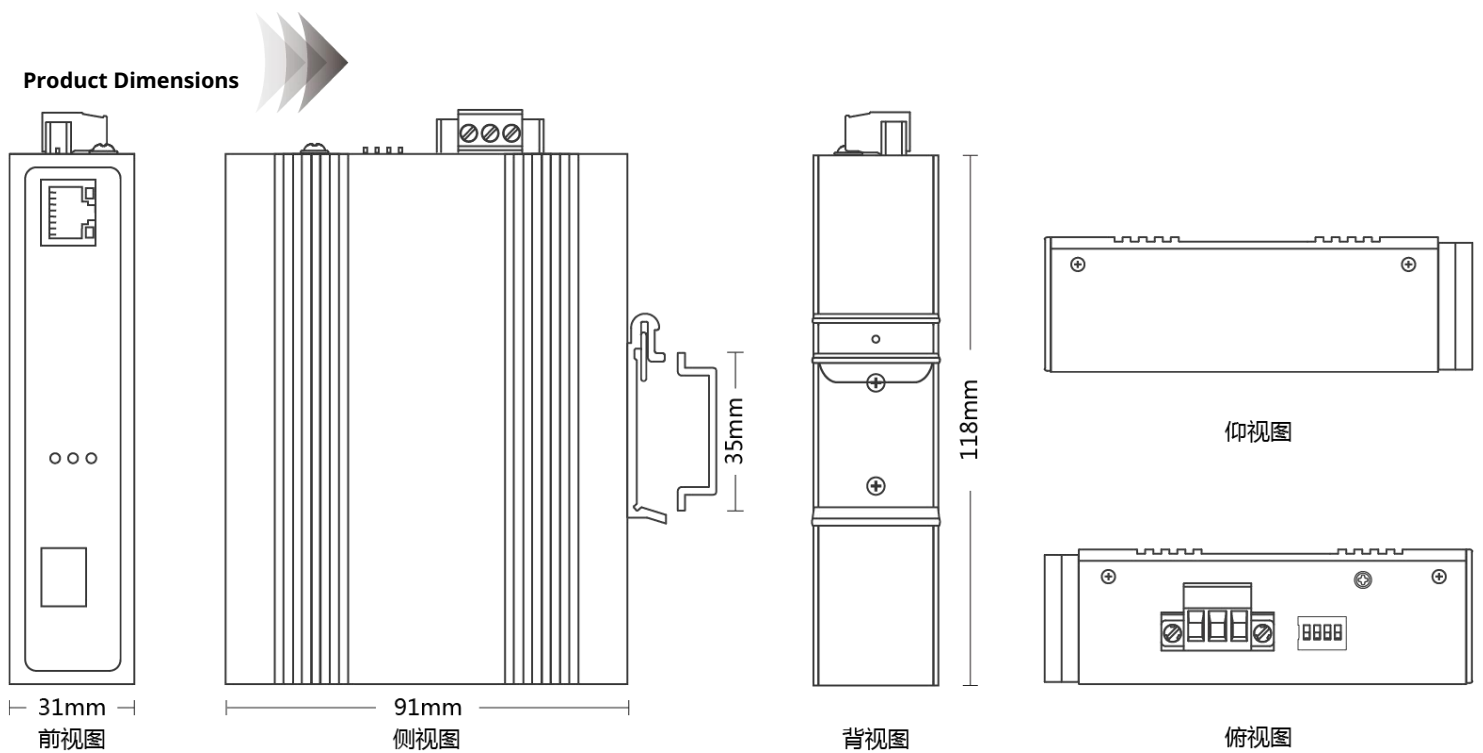

Product Parameters

Interface (Provider Mode Ports)

Service Interface (Fixed port)	1*100 Base-FX, 1*10/100 Base-TX
Power Interface	Phoenix terminal, dual power redundancy
LED Indicators	P1/P2,OPT

Dialing Instructions

1 LFP	LFP
2 LGY	Reserved
3 VLAN	Reserved
4 BSR	Reserved

Cable type & Transmission distance

Twisted-pair	0-100m (CAT5e, CAT6)
Single-mode optical fiber (Monomode optical fiber)	20/40/60/80/100KM
Multimode optical fibre (Multimode optical fiber)	550m

Network Topology

Ring topology	Not supported
Star topology	Supported
Bus topology	Supported
Tree Topology	Supported

Electrical Specifications

input voltage	DC12-58V ; PoE 48-58V
Total Power consumption	Non-PoE <5W ; PoE <35W

PoE Support optional

PoE port	1
PoE Protocol	802.3af, 802.3at
PoE Pin Assignment	1,2,3,6

Layer 2 Switching

Switching capacity	1G
Packet forwarding rate	0.297Mpps
MAC address table	2K
Buffer	768K
Forwarding delay	<5us
Polarity reversal (MDI/MDIX)	Supported
Jumbo Frame	Supports 2K bytes
Storm suppression (BSR)	Supported
Link failover (LFP)	Supported
Port-Isolation	Supported

Mechanical Dimensions

Product size	31*91*118mm
Installation Method	DIN Rail Mounting
Weight	Approximately 0.36KG

Environment

Operating temperature	-40°C~+75°C
Storage temperature	-40°C~+75°C
Relative humidity	10%~90% non-condensing
Thermal methods	Fanless design, natural cooling
MTBF	100,000 hours

Protection (EMC & INGRES PROTECTION)

IP Level	IP40
Surge protection of Power	IEC 61000-4-5 Level 3 (4KV/2KV) (8/20us)
Surge protection of Ethernet port	IEC 61000-4-5 Level 3 (4KV/2KV) (10/700us)
Electrostatic Discharge (ESD)	IEC 61000-4-2 Level 4 (8K/15K)

Related Certification (Authentication)

Certification (Authentication)	Ministry of Public Security, Ministry of Industry and Information Technology inspection report and network access license, CE/FCC/RoHS
--------------------------------	--

Accessories

Accessories	Equipment, terminals, certificate of conformity, manual, power adapter (optional)
-------------	---

Optional model

XPTN-9000-43-1FX1TX	1 100Mbps SFP optical interface (optical connector options: SC, ST, FC) 1 10/100M adaptive electrical port (PoE optional)
---------------------	--