



XPTN-9000-43-1GX1GT-

6110 Unmanaged Industrial Switch

Input Voltage:DC9-24V

Operating Temperature:-40 °C ~ +75 °C

Enclosure:IP40 protection level, fanless design

Inspection Report:CE/FCC/RoHS

Anti-Static:8KV-15KV


MTBF:100,000 hours

Product Description



This device is a 1000M optical port & 1 10/100/1000M adaptive Ethernet industrial fast switch. Through a fanless heat dissipation circuit design, wide operating temperature range, high protection level, and other technologies, it provides excellent industrial-grade quality with high/low temperature resistance and lightning protection, enhancing the reliability and security of industrial networks. It better meets the deployment requirements in harsh environments such as rail transportation, safe cities, intelligent transportation, outdoor monitoring, and more.

Product Size

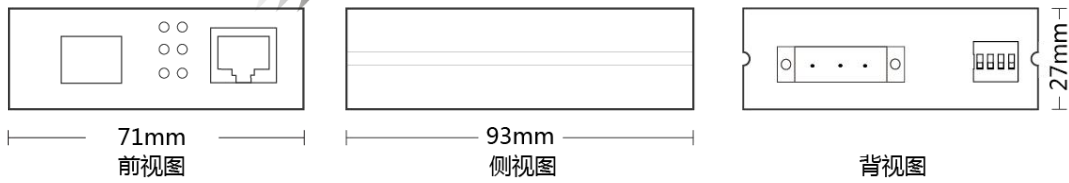

Product Parameters

Interface (Provider Mode Ports)

Service Interface (Fixed port)	1*1000 Base-FX, 1*10/100/1000 Base-T
Power Interface	Phoenix Terminal, Dual Power Redundancy
LED Indicators	PWR, copper (link/ACT), FDX, Fiber (link/ACT)

Dialing Instructions

1	LFP
2	Storm Suppression
3	100M Light
4	100M Power

Cable type & Transmission distance

Twisted-pair	0-100m (CAT5e, CAT6)
Single-mode optical fiber (Monomode optical fiber)	20/40/60/80/100KM
Multimode optical fiber (Multimode optical fibre)	550m

Network Topology

Ring topology	Not supported
Star topology	Supported
Bus topology	Supported
Tree Topology	Supported

Electrical Specifications

Input Voltage	DC 9-24 V
Total Power consumption	<5W

Layer 2 Switching

Switching capacity	14G
Packet forwarding rate	10.416Mpps
MAC address table	8K
Buffer	1M
Forwarding delay	<5us
MDI/MDIX	Supported
Jumbo Frame	Supports 10Kbytes

Mechanical Dimensions

Product size	71*93*27mm
Installation Method	Wall-mounted installation
Weight	Approximately 0.2KG

Environment

Operating temperature	-40°C~+75°C
Storage temperature	-40°C~+75°C
Relative humidity	10%~90% non-condensing
Thermal methods	Fanless design, natural cooling
MTBF	100,000 hours

Protection (EMC & INGRESS PROTECTION)

IP Level	IP40
----------	------

Surge protection of Power	IEC 61000-4-5 Level 3 (4KV/2KV) (8/20us)
Surge protection of Ethernet port	IEC 61000-4-5 Level 3 (4KV/2KV) (10/700us)
Electrostatic Discharge (ESD)	IEC 61000-4-2 Level 4 (8K/15K)

Related Certification (Authentication)

Certification (Authentication)	Inspection reports and network access licenses from the Ministry of Public Security and the Ministry of Industry and Information Technology, CE
--------------------------------	---

Accessories

Accessories	Equipment, terminals, certificate of conformity, manual, power adapter (optional)
-------------	---

Optional model

XPTN-9000-43-1GX1GT-6110	1 Gigabit SFP optical interface (optical port options: SC, ST, FC) 1 10/100/1000M adaptive electrical port
--------------------------	---