



XPTN-9000-45-1FX8TX

Unmanaged Industrial Switch

Input Voltage:DC 12-58V

Operating Temperature:- 40 °C ~ + 75 °C

Enclosure:IP40 protection level, fanless design

Inspection Report:CE/FCC/RoHS

Anti-static:8KV-15KV


MTBF:100,000 hours

Product Description



This device is a 100M optical port & 8 10/100M self-adaptive Ethernet industrial fast switch, with optional POE. Through a fanless heat dissipation circuit design, wide operating temperature range, high protection level, and other technologies, it provides excellent industrial-grade quality with high/low temperature resistance, lightning protection, etc., enhancing the reliability and safety of industrial networks. It can better meet the deployment requirements in harsh environments such as rail transit, safe cities, intelligent transportation, outdoor monitoring, and others.

Product Dimensions

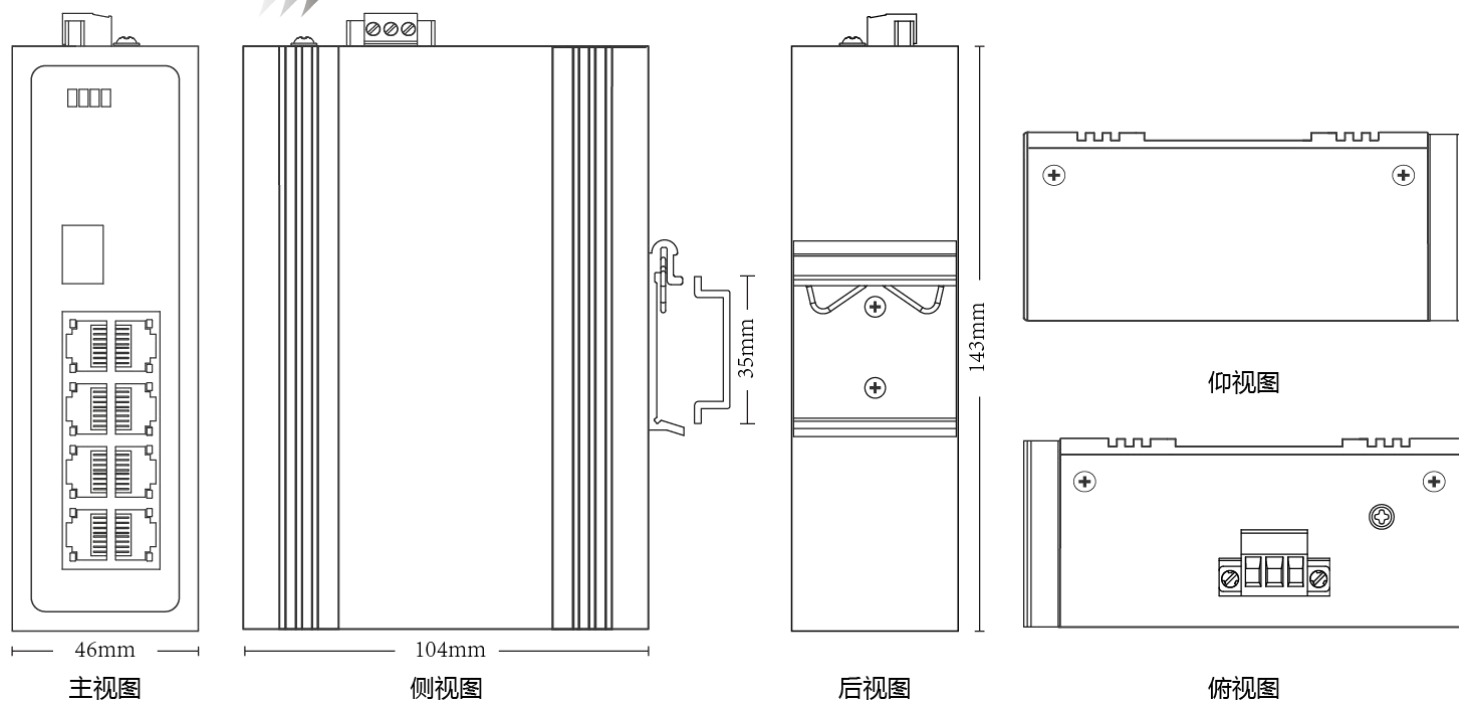

Product Parameters

Interface (Provider Mode Ports)

Service Interface (Fixed port)	1*100 Base-FX, 8*10/100 Base-TX
Power Interface	Phoenix terminal, dual power redundancy
LED Indicators	PWR, Link/ACT LED

Cable Type & Transmission Distance

Twisted-pair	0-100m (CAT5e, CAT6)
Single-mode optical fiber (Monomode optical fiber)	20/40/60/80/100KM
Multimode optical fiber (Multimode optical fibre)	550m

Network Topology

Ring topology	Not supported
Star topology	Supported
Bus topology	Supported
Tree Topology	Supported

Electrical Specifications

Input Voltage	DC12-58V
Total Power Consumption	Total Power <5W; PoE Total Power <245W

PoE Support Optional

PoE Port	1-8
PoE Protocol	802.3af, 802.3at
PoE Pin Assignment	1,2,3,6

Layer 2 Switching

Switching capacity	1.8G
Packet forwarding rate	1.33Mpps
MAC address table	2K
Buffer	512K
Forwarding delay	<4us
Polarity reversal (MDI/MDIX)	Supported
Jumbo Frame	Supports 2048 Byte

Mechanical Dimensions

Product size	46X104X143mm
Installation Method	Rail-mounted installation
Weight	0.55KG

Environment

Operating temperature	-40°C~+70°C
Storage temperature	-40°C~+70°C
Relative humidity	10%~90% non-condensing

Thermal methods	Fanless design, natural cooling
MTBF	100,000 hours

Protection (EMC & INGRESS PROTECTION)

IP Level	IP40
Surge protection of Power	IEC 61000-4-5 Level 3 (4KV/2KV) (8/20us)
Surge protection of Ethernet port	IEC 61000-4-5 Level 3 (4KV/2KV) (10/700us)
Electrostatic Discharge (ESD)	IEC 61000-4-2 Level 4 (8K/15K)

Related Certification (Authentication)

Authentication	Inspection reports and network access licenses from the Ministry of Public Security and the Ministry of Industry and Information Technology, CE
----------------	---

Accessories

Accessories	Equipment, terminals, certificates of conformity, manuals, power adapters (optional)
-------------	--

Optional Model

XPTN-9000-45-1FX8TX	1 100M SFP optical interface (optical port options: SC, ST, FC) 8 10/100M self-adaptive electrical ports (PoE optional)
---------------------	--