



XPTN-9000-45-1GX1GT4TPB Unmanaged Industrial Hi-PoE Switch

Input Voltage: DC48-58V

Working temperature: -40°C ~ +75°C

Shell: IP40, aluminium fanless design

Test report: CE/FCC/RoHS

Anti-static: 8KV-15KV


MTBF: 100000 hours

Product Description



This device unmanaged industrial switch with 4*10/100Mbps adaptive RJ45 ports and 1* 10/100/1000Mbps adaptive RJ45 ports, 1* Gigabit SFP ports, port 1-4 support PoE/PoE+ and 5-6 are uplink ports. Through the fanless cooling circuit and aluminum cases design, IP40 rated protection and wide range working temperature from -40 to 75 degree C, 8-15KV anti-static and 6KV/4KV surge protection, rugged DIN-rail installation. It can meet the deployment requirements of rail transit, safe city, intelligent transportation, outdoor monitoring and other harsh environments.

Product Size

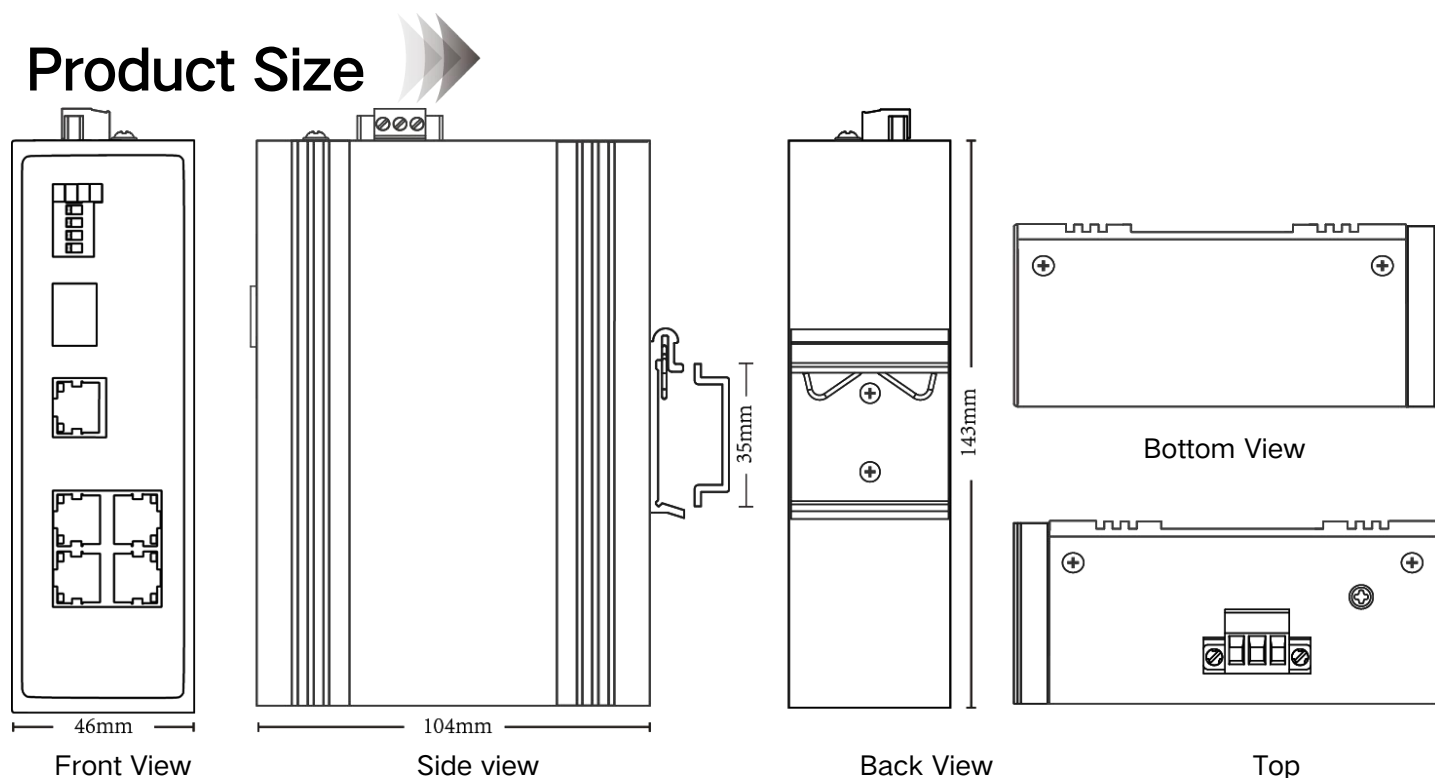

Product Parameter

Interfaces

Fixed port	1*1000 Base-X, 1*10/100/1000 Base - T, 4*10/100 Base - T
Power interface	Phoenix terminal, dual power back up
LED Indicators	P,6

Dialing Instructions

1	PoE WatchDog
2	250m long transmission distance (1-4 port)
3	Port Isolation
4	Storm control

Cable Type&Transmission Distance

Twisted-pair	0-100m (CAT5e,CAT6)
Monomode optical fiber	20/40/60/80/100KM
Multimode optical fibre	550m

Network Topology

Ring topology	Not support
---------------	-------------

Star topology	Support
Bus topology	Support
Tree Topology	Support
Electrical Specifications	
Input voltage	DC12~58V; PoE DC 48~58V
Total Power consumption	Non-PoE<3W; PoE<150W
PoE++ Support	
PoE Support	Port 1 (Max. 90W)
PoE Protocol	802.3af, 802.3at, 802.3bt
Pin assignment	1,2,4,5+/ 3,6,7,8-
PoE/PoE+ Support	
PoE Support	Port 1~4
PoE Protocol	802.3af, 802.3at
Pin assignment	1,2+/ 3,6-
Layer 2 Switching	
Switching capacity	4.8G
Packet forwarding rate	3.57Mpps
MAC address table	2K
Buffer	2Mbit
Forwarding delay	<5us
MDX/MIDX	Support
Jumbo Frame	Support 9K bytes
Environment	
Operating temperature	-40°C~+75°C
Storage temperature	-40°C~+75°C
Relative humidity	10%~90% non-condensing
Thermal methods	Fanless, natural cooling
MTBF	100,000 hours
Mechanical Dimensions	
Product size	46X104X143mm (W*D*H)
Installation Method	DIN rail
Weight	0.57KG around
EMC & Ingress Protection	
IP Level	IP40

Surge protection of Power	IEC 61000-4-5 Level 3 (4KV/4KV) (8/20us)
Surge protection of Ethernet port	IEC 61000-4-5 Level 3 (6KV/4KV) (10/700us)
ESD	IEC 61000-4-2 Level 4 (8K/15K)
Authentication	
Authentication	CCC/CE/FCC/RoHS
Accessories	
Accessories	Device, Terminals, Specification, Certificate Adapter(optional)
Order Information	
XPTN-9000-45-1GX1GT4TPB	1*1000 Base-X, 1*10/100/1000 Base - T, 4*10/100 Base - T Port 1-4 support PoE/PoE+, port 1 support PoE++