



XPTN-9000-45-1GX8GT

Unmanaged Industrial Switch

Input Voltage:DC 12-58V

Operating Temperature:- 40 °C ~ + 75 °C

Enclosure:IP40 protection level, fanless design

Inspection Report:CE/FCC/RoHS

ESD Protection:8KV-15KV

MTBF:100,000 hours


Product Description



This device is an industrial Ethernet fast switch with 1 Gigabit SFP port and 8 10/100/1000M adaptive Ethernet ports, with optional POE.

It features a fanless heat dissipation circuit design, wide operating temperature range, and high protection level, providing excellent industrial-grade quality such as high/low temperature resistance and lightning protection, enhancing the reliability and security of industrial networks. It can better meet the deployment requirements in harsh environments such as rail transit, safe cities, intelligent transportation, outdoor monitoring, and more.

Product Dimensions

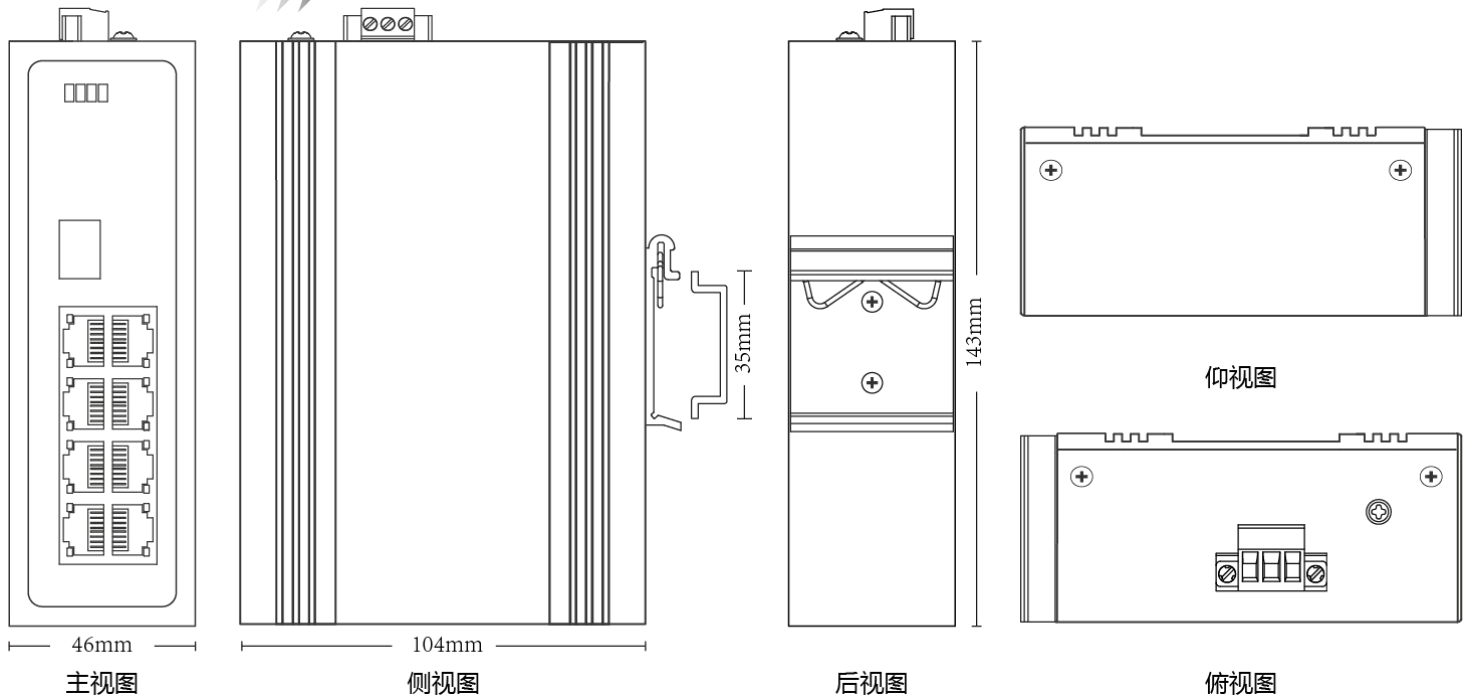

Product Parameters

Interface (Provider Mode Ports)

Service Interface (Fixed port)	1*1000 Base-X, 8*10/100/1000 Base-T
Power Interface	Phoenix terminal, dual power redundancy
LED Indicators	PWR, Link/ACT LED

Cable Type & Transmission Distance

Twisted-pair	0-100m (CAT5e, CAT6)
Single-mode optical fiber (Monomode optical fiber)	20/40/60/80/100KM
Multimode optical fiber (Multimode optical fibre)	550m

Network Topology

Ring topology	Not supported
Star topology	Supported
Bus topology	Supported
Tree Topology	Supported

Electrical Specifications

Input Voltage	DC12-58V PoE 48-58V
Total Power Consumption	Total Power <5W; PoE Total Power <245W

PoE Support Optional

PoE Port	1-8
PoE Protocol	802.3af, 802.3at
PoE Pin Assignment	1,2,3,6

Layer 2 Switching

Switching capacity	20G
Packet forwarding rate	14.88 Mpps
MAC address table	16K
Buffer	2M
Forwarding delay	<5us
Polarity reversal (MDI/MDIX)	Supported
Jumbo Frame	Supports 10KBytes

Mechanical Dimensions

Product size	46X104X143mm
Installation Method	Rail-mounted installation
Weight	0.55KG

Environment

Operating temperature	-40°C~+75°C
Storage temperature	-40°C~+75°C
Relative humidity	10%~90% non-condensing

Thermal methods	Fanless design, natural cooling
MTBF	100,000 hours

Protection (EMC & INGRES PROTECTION)

IP Level	IP40
Surge protection of Power	IEC 61000-4-5 Level 3 (4KV/2KV) (8/20us)
Surge protection of Ethernet port	IEC 61000-4-5 Level 3 (4KV/2KV) (10/700us)
Electrostatic Discharge (ESD) resistance	IEC 61000-4-2 Level 4 (8K/15K)

Related Certifications (Authentication)

Authentication	Inspection reports and network access licenses from the Ministry of Public Security and the Ministry of Industry and Information Technology, CE
----------------	---

Accessories

Accessories	Equipment, terminals, certificates of conformity, manuals, power adapters (optional)
-------------	--

Optional Model

XPTN-9000-45-1GX8GT	1 Gigabit SFP optical interface (optical port options: SC, ST, FC) 8 10/100/1000M adaptive Ethernet ports (PoE optional)
---------------------	---