


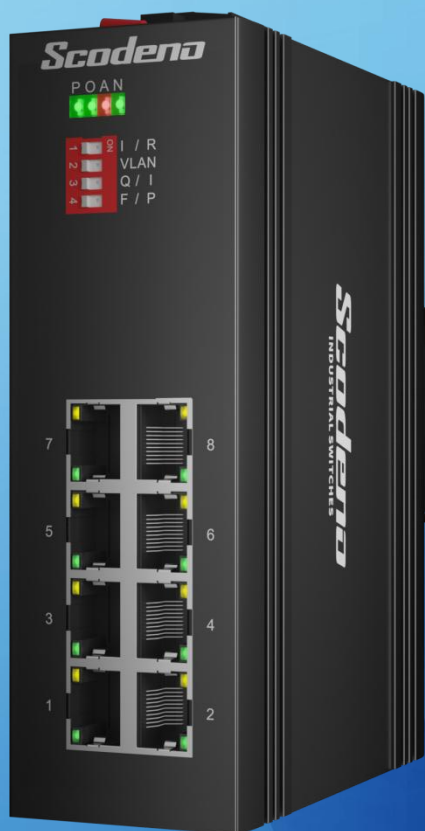

# XPTN-9000-65-8TX

## Unmanaged Industrial Switch

Input Voltage:DC 12-58V

Operating Temperature:- 40 °C ~ + 85 °C

Enclosure:IP40 protection level, fanless design

DIP Switch:4-position special DIP switch function

Inspection Report:CE/FCC/RoHS

ESD Protection:8KV - 15KV


MTBF:100,000 hours

### Product Description



**This device is an 8-port 10/100 Base-TX unmanaged industrial Ethernet switch that supports PoE. Through fanless heat dissipation circuit design, wide operating temperature range, high protection level, and other technologies, it provides excellent industrial-grade quality with high/low temperature resistance, lightning protection, and more. It enhances the reliability and security of industrial networks, meeting the deployment requirements in harsh environments such as rail transit, smart cities, intelligent transportation, outdoor monitoring, and others.**

### Product Dimensions

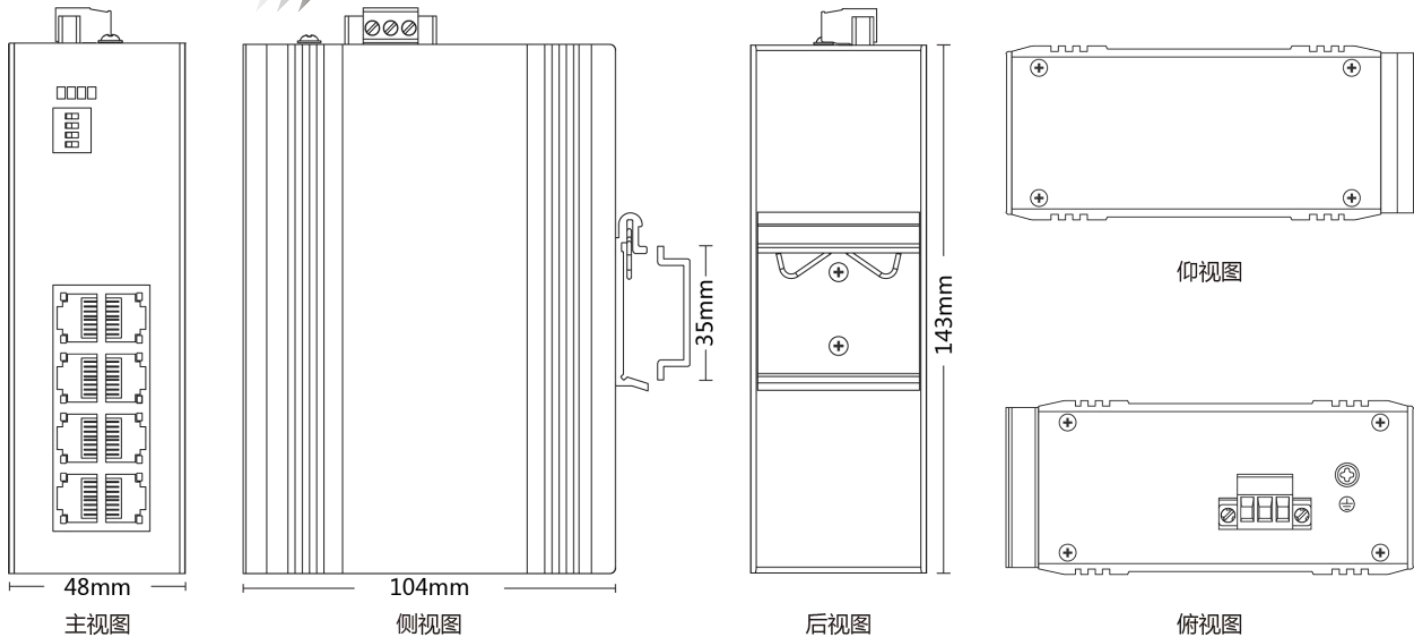

### Product Parameters

#### Interface (Provider Mode Ports)

|                                |                                         |
|--------------------------------|-----------------------------------------|
| Service Interface (Fixed port) | 8*10/100Base-T                          |
| Power Interface                | Phoenix terminal, dual power redundancy |
| LED Indicators                 | PWR, OPT, ALM, NMC                      |

#### Non-PoE Model Dialing Instructions

|        |                |
|--------|----------------|
| 1 I/R  | Port Isolation |
| 2 VLAN | VLAN Isolation |
| 3 Q/I  | QoS            |
| 4 F/P  | Flow Control   |

#### Dialing instructions

|        |                                       |
|--------|---------------------------------------|
| 1 I/R  | Non-sensing reboot                    |
| 2 VLAN | 250 meters long-distance transmission |
| 3 Q/I  | Port Isolation                        |
| 4 F/P  | VIP power supply and QoS              |

## Cable type & Transmission distance

|              |                      |
|--------------|----------------------|
| Twisted-pair | 0-100m (CAT5e, CAT6) |
|--------------|----------------------|

## Network Topology

|               |               |
|---------------|---------------|
| Ring topology | Not supported |
| Star topology | Support       |
| Bus topology  | Support       |
| Tree Topology | Support       |

## Electrical Specifications

|                         |                                              |
|-------------------------|----------------------------------------------|
| input voltage           | Non-PoE: 12-58V<br>PoE: DC 48-58V            |
| Total Power consumption | Non-PoE full load <6W<br>PoE full load <246W |

## PoE Support optional

|                    |                  |
|--------------------|------------------|
| PoE port           | 1-8              |
| PoE Protocol       | 802.3af, 802.3at |
| PoE Pin Assignment | 1,2,3,6          |

## Layer 2 Switching

|                              |                     |
|------------------------------|---------------------|
| Switching capacity           | 1.6G                |
| Packet forwarding rate       | 1.1904Mpps          |
| MAC address table            | 2K                  |
| Buffer                       | 768K bit            |
| Forwarding delay             | <5us                |
| Polarity reversal (MDI/MDIX) | Support             |
| Flow control                 | Support             |
| Jumbo Frame                  | Supports 2048 Bytes |
| WatchDog function            | Support             |
| Port isolation               | Support             |

## Mechanical Dimensions

|                     |                     |
|---------------------|---------------------|
| Product size        | 143X104X48mm        |
| Installation Method | DIN rail mounting   |
| Weight              | Approximately 0.6KG |

## Environment

|                       |                                 |
|-----------------------|---------------------------------|
| Operating temperature | -40°C~+85°C                     |
| Storage temperature   | -40°C~+85°C                     |
| Relative humidity     | 5%~95% non-condensing           |
| Thermal methods       | Fanless design, natural cooling |
| MTBF                  | 100,000 hours                   |

## Protection (EMC & INGRESS PROTECTION)

|                                                    |                                          |
|----------------------------------------------------|------------------------------------------|
| IP Level                                           | IP40                                     |
| Surge protection of Power                          | IEC 61000-4-5 Level X (6KV/4KV)(8/20us)  |
| Surge protection of Ethernet port                  | IEC 61000-4-5 Level 4(4KV/4KV)(10/700us) |
| Radiated Susceptibility (RS)                       | IEC 61000-4-3 Level 3 (10V/m)            |
| Instantaneous Pulse Immunity (EFI)                 | IEC 61000-4-4 Level 3 (1V/2V)            |
| Conducted Susceptibility (CS)                      | IEC 61000-4-6 Level 3 (10V/m)            |
| Power Frequency Magnetic Field Interference (PFMF) | IEC 61000-4-8 Level 4 (30A/m)            |
| Voltage Dips (DIP)                                 | IEC 61000-4-11 Level 3 (10V)             |
| Electrostatic Discharge (ESD)                      | IEC 61000-4-2 Level 4 (8K/15K)           |
| Free Fall                                          | 0.5m                                     |

## Related Certifications (Authentication)

|                                |                                                                                                                                        |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Certification (Authentication) | Ministry of Public Security, Ministry of Industry and Information Technology Inspection Report and Network Access License, CE/FCC/RoHS |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|

## Accessories

|             |                                                                                   |
|-------------|-----------------------------------------------------------------------------------|
| Accessories | Equipment, terminals, certificate of conformity, manual, power adapter (optional) |
|-------------|-----------------------------------------------------------------------------------|

## Optional model

|                  |                                                       |
|------------------|-------------------------------------------------------|
| XPTN-9000-65-8TX | 8 10/100M self-adaptive Ethernet ports (POE optional) |
|------------------|-------------------------------------------------------|