



XPTN-9000-75-2GX8GT-VB

Management-type Industrial Switch

Input Voltage:DC 12-58V

Operating Temperature:- 4 0 °C ~ + 8 5 °C

Enclosure:IP40 protection level, fanless design

Inspection Report:CE / FCC / RoHS


Anti-static:8KV-15KV

MTBF:100,000 hours

Product Description

This device is a management-type industrial Ethernet fast switch with 2 Gigabit optical ports and 8 10/100/1000Base-T ports. It provides excellent industrial-grade quality with technologies such as fanless heat dissipation circuit design, wide operating temperature range, and high protection level, ensuring resistance to high/low temperatures and lightning strikes. Additionally, it integrates various rich protocols including switching and security, while supporting public Ethernet multi-ring protection technology (ERPS), greatly enhancing network flexibility and improving the reliability and security of industrial networks. It is also capable of meeting deployment requirements in harsh environments such as rail transit, safe cities, intelligent transportation, outdoor monitoring, and more.

Product Dimensions

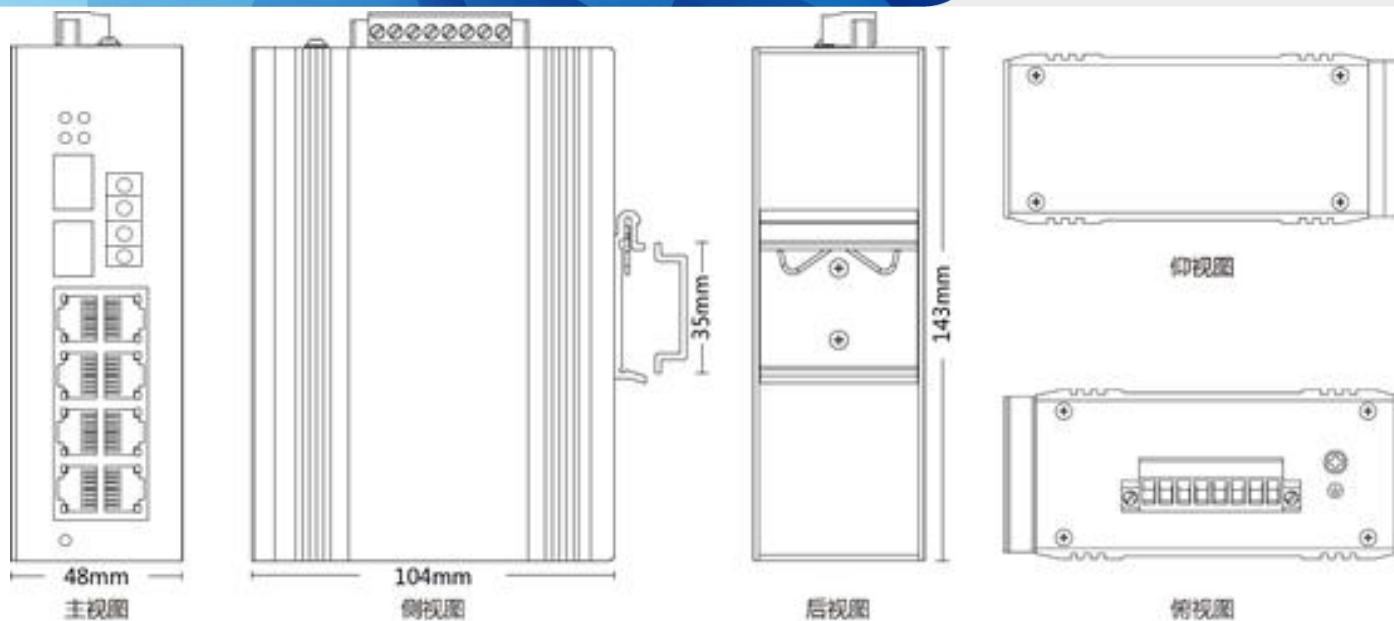

Product Parameters



Interface (Provider Mode Ports)

Service Interface (Fixed port)	2*1000 Base-X, 8*10/100/1000 Base-T
Management Interface (Management Port)	Supports console
Power Interface (Power interface)	Phoenix terminal, dual power redundancy
LED Indicators (LED Indicators)	PWR, Link/ACT LED
Bypass interface	Support

Cable type & Transmission distance

Twisted-pair	0-100m (CAT5e, CAT6)
Monomode optical fiber	20/40/60/80/100KM
Multimode optical fibre	550m

Network Topology

Ring topology	Support
Star topology	Support
Bus topology	Support
Tree Topology	Support
Hybrid topology	Support

Electrical Specifications

input voltage	Non-PoE: DC12-58V PoE: DC48-58V
Total Power consumption	Non-PoE<10W PoE<250W

PoE Support optional

PoE port	1-8
PoE Protocol	802.3af, 802.3at
PoE Pin Assignment	1,2,3,6
PoE Management	Support

PoE Support Optional

PoE port	1-8
PoE Protocol	802.3af, 802.3at, 802.3bt (Ports 1-2 Supported)
PoE Pin Assignment	af/at: 1,2,3,6 bt : 1-8
PoE Management	Support

Layer 2 Switching

Switching capacity	36G
Packet forwarding rate	26.78Mpps
MAC address table	16K
VLAN support and quantity	Supports 4K
Buffer	12M
Forwarding delay	<10us
Polarity Reversal (MDX/MIDX)	Support
Flow Control	Support

Jumbo Frame	Supports 10Kbytes
Spanning Tree Protocol	Supports STP/RSTP/MSTP
Ring Protocol	Supports ERPS
Link Aggregation	Supports 12 groups
Multicast	Supports IGMP Snooping
Port Mirroring	Support
Storm Control	Support
Interface Counters	Support
Interface Counters	Support
QINQ	Support
802.1X	Support
MAC Authentication	Support
Port Isolation	Support
Rmon	Support
NTP client	Support
DHCP client	Support
DHCP snooping	Support
Ping/tracert detection	Support
Dying gasp	Support
DDM	Support
Port security	Support
IP Source Guard	Support
Device scanning	Support

Convergence

Access Control List (ACL)	Supports 500 ACL entries; Supports IP standard ACL; Supports MAC extended ACL; Supports IP extended ACL;
Quality of Service (QoS)	Supports QoS re-marking, priority mapping; Supports SP, WRR queue scheduling; Supports ingress rate limiting, egress rate limiting; Supports flow-based QoS

Management Functions

Command Line Interface (CLI)	Support
Management Console	Support
Telnet/SSH	Support
WEB Management	Support
Management IP	Support IPV4/IPV6
SNMP	Supports SNMPv1/v2c/v3

User Management	Support
System Log	Support
Configuration File Download/Upload	Support
Upgrade Firmware	Support

Mechanical Dimensions

Product size	48X104X143mm
Installation Method	Rail-mounted installation
Weight	0.58KG

Environmental conditions

Operating temperature	-40°C~+85°C
Storage/transport temperature	-40°C~+85°C
Relative humidity	5%~95% non-condensing
Thermal methods	Fanless design, natural heat dissipation
MTBF	100,000 hours

Protection (EMC & INGRESS PROTECTION)

IP Level	IP40
Surge protection of Power	IEC 61000-4-5 Level X (6KV/6KV) (8/20us)
Surge protection of Ethernet port	IEC 61000-4-5 Level 4 (4KV/4KV) (10/700us)
Radiation immunity (RS)	IEC 61000-4-3 Level 3 (10V/m)
Instantaneous Pulse Interference Immunity (EFI)	IEC 61000-4-4 Level 3 (1V/2V)
Conducted Interference Immunity (CS)	IEC 61000-4-6 Level 3 (10V/m)
Power Frequency Magnetic Field Immunity (PFMF)	IEC 61000-4-8 Level 4 (30A/m)
Voltage Dips (DIP)	IEC 61000-4-11 Level 3 (10V)
Electrostatic Discharge Immunity (ESD)	IEC 61000-4-2 Level 4 (8K/15K)
Free fall	0.5m

Authentication

Authentication	Inspection reports and network access licenses from the Ministry of Public Security and the Ministry of Industry and Information Technology, CE
----------------	---

Accessories

Accessories	Equipment, terminals, certificates of conformity, manuals, power adapters (optional)
-------------	--

Optional model

XPTN-9000-75-2GX8GT-VB	2 Gigabit SFP optical interfaces, 8 10/100/1000M electrical ports
------------------------	---

XPTN-9000-75-2GX8GP-VB

2 Gigabit SFP optical interfaces, 8 10/100/1000M electrical ports, supports PoE & PoE+

XPTN-9000-75-2GX8GP2B-VB

2 Gigabit SFP optical interfaces, 8 10/100/1000M electrical ports, supports PoE & PoE+ & PoE++