


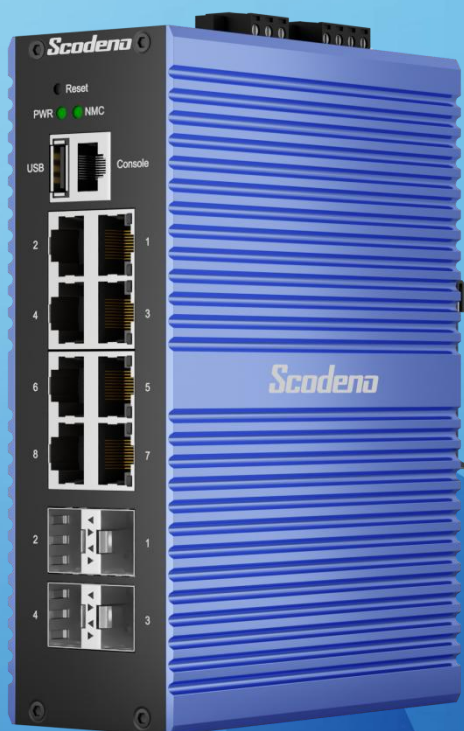

XPTN-9000-87-4XG8GT-VAX

Managed Industrial Switch

Input Voltage:DC 18-58V

Operating Temperature:- 4 0 °C ~ + 7 5 °C

Enclosure:IP40 protection level, fanless design

Inspection Report:CE / FCC / RoHS


Anti-Static:8KV-15KV

MTBF:100,000 hours

Product Description

This device is a managed industrial Ethernet switch with 4 10G optical ports and 8 10/100/1000Base-T ports. It features a fanless heat dissipation circuit design, a wide operating temperature range, and a high protection level, providing excellent industrial-grade quality that is resistant to high/low temperatures and lightning strikes. It also integrates various rich protocols such as switching and security, while supporting public Ethernet multi-ring protection technology (ERPS), greatly enhancing network flexibility and improving the reliability and security of industrial networks. It meets the deployment requirements in harsh environments such as rail transit, safe cities, intelligent transportation, outdoor monitoring, and more.

Product Dimensions

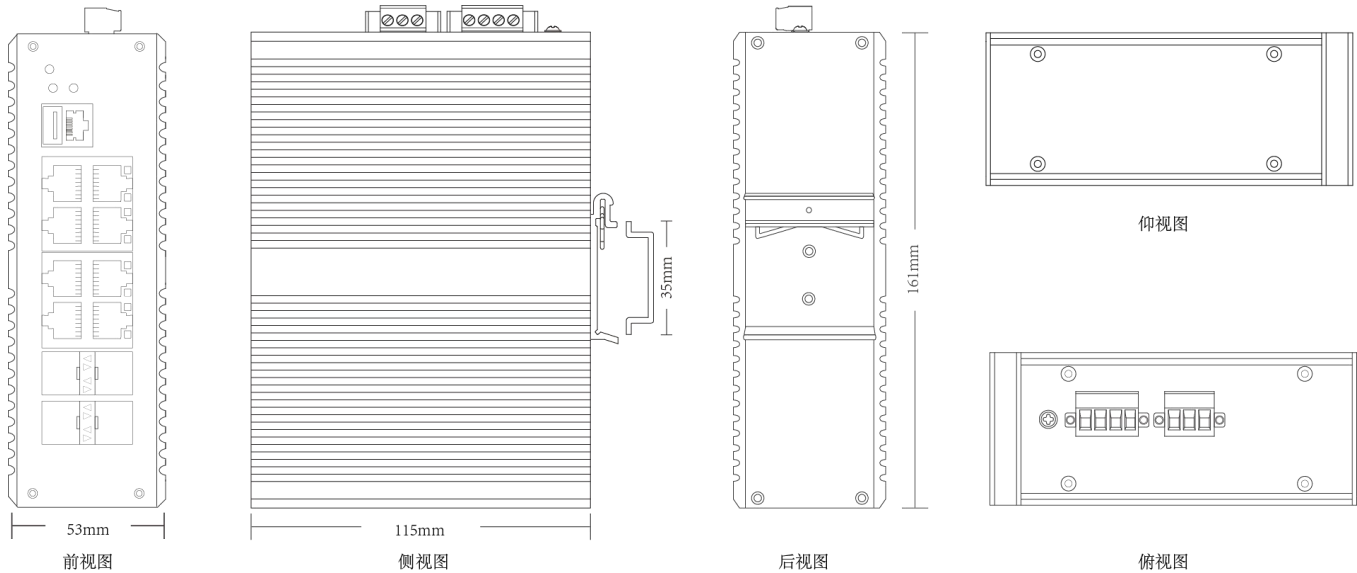

Product Parameters

Interface (Provider Mode Ports)

Service Interface (Fixed port)	4*10GBase-X, 8*10/100/1000 Base-T
Management Interface (Management Port)	Supports console, Supports USB
Power Interface (Power interface)	
LED Indicators (LED Indicators)	PWR, Link/ACT LED

Cable type & Transmission distance

Twisted-pair	0-100m (CAT5e, CAT6)
Monomode optical fiber	20/40/60/80/100KM
Multimode optical fibre	550m

Network Topology

Ring topology	Support
Star topology	Support
Bus topology	Support
Tree Topology	Support
Hybrid topology	Support

Electrical Specifications

input voltage	DC18-58V
Total Power consumption	Full load <20W POE full load <260W

PoE Support optional

PoE port	1-8
PoE Protocol	802.3af, 802.3at
PoE Pin Assignment	1,2,3,6
PoE Management	Support

Layer 2 Switching

Switching capacity	160G
Packet forwarding rate	95.23 Mpps
MAC address table	16K
VLAN support and quantity	
Buffer	12M
Forwarding delay	<10us
Polarity reversal	Support
Flow control	Support
Jumbo Frame	Supports 10Kbytes
Spanning Tree Protocol	Supports STP/RSTP/MSTP
Ring Protocol	Supports ERPS
Link Aggregation	
Multicast	Supports IGMP Snooping
Port Mirroring	Support

Storm Control	Support
Interface Counters	Support
QINQ	Support
802.1X	Support
Radius/Mac Authentication	Support
Port Isolation	Support
Rmon	Support
NTP client	Support
DHCP client	Support
DHCP snooping	Support
Ping/tracert detection	Support
Dyinggasp	Support
DDM	Support
Port security	Support
IP Source Guard	Support
	Support

Layer 3 function

	Supports 1K static routes
ARP	ARP entry aging
DHCP server	Support

Convergence

Access Control List (ACL)	Supports 500 ACLs; Supports IP standard ACL; Supports MAC extended ACL; Supports IP extended ACL;
Quality of Service (QoS)	Supports QoS re-tagging, priority mapping; Supports SP, WRR queue scheduling; Supports ingress rate limiting, egress rate limiting; Supports flow-based QoS

Management

	Support
Management Console	Support
Telnet/SSH	Support
	Support
	Support IPV4/IPV6
SNMP	Support SNMPv1/v2c/v3
User Management	Support
System Log	Support
Configuration File Download/Upload	Support

Upgrade Firmware

Support

Mechanical Dimensions

Product size	161*115*53mm
Installation Method	
Weight	

Environment

Operating temperature	-40°C~+75°C
Storage temperature	-40°C~+85°C
Relative humidity	5%~95% non-condensing
Thermal methods	Fanless design, natural cooling
MTBF	100,000 hours

Protection (EMC & INGRESS PROTECTION)

IP Level	IP40
Surge protection of Power	IEC 61000-4-5 Level 4 (4KV/2KV) (8/20us)
Surge protection of Ethernet port	IEC 61000-4-5 Level 4 (4KV/2KV) (10/700us)
	IEC 61000-4-3 Level 3 (10V/m)
	IEC 61000-4-4 Level 3 (1V/2V)
	IEC 61000-4-6 Level 3 (10V/m)
	IEC 61000-4-8 Level 4 (30A/m)
Voltage Drop (DIP)	IEC 61000-4-11 Level 3 (10V)
Electrostatic Discharge (ESD)	IEC 61000-4-2 Level 4 (8K/15K)
Free fall	0.5m

Related certifications

Certification	
---------------	--

Accessories

Accessories	Equipment, terminals, certificate of conformity, manual, power adapter (optional)
-------------	---

Optional model

XPTN-9000-87-4XG8GT-VAX	4 10G optical ports, 8 10/100/1000M electrical ports
XPTN-9000-87-4XG8GP-VAX	4 10G optical ports, 8 10/100/1000M electrical ports, supports PoE & PoE+