
BRIDGE TEST - reference fixture

Table 1. Design loads (kN). Keep row and column associations.

Member	Service (kN)	Ultimate (kN)
Beam A	125.5	188.25
Beam B	240.0	360.0

Figure 1. Simply supported beam, span 12 m, load 80 kN.

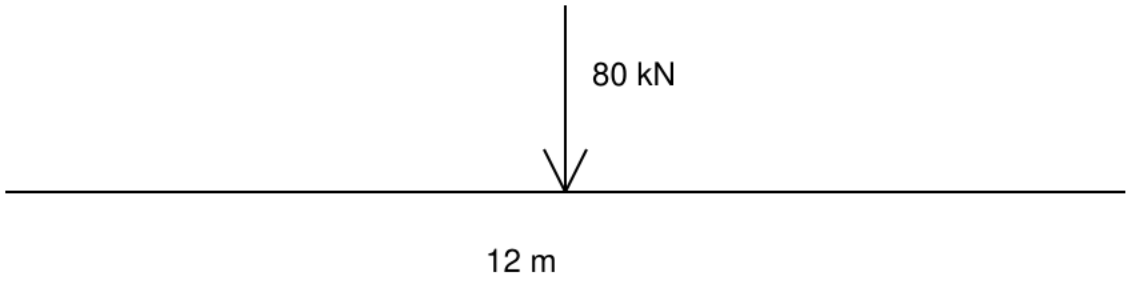

ORDER_ALPHA starts the left column.
ORDER_BETA ends the left column.
ORDER_GAMMA starts right.
ORDER_DELTA ends right.