BAB 2. TCP/IP Model

2.1 Tujuan

- Mahasiswa mampu melakukan identifikasi transmisi data menggunakan model TCP/IP
- Mahasiswa mampu melakukan identifikasi layer dari model TCP/IP
- Mahasiswa mampu menggunakan aplikasi untuk mengidentifikasi data dari model TCP/IP

2.2 Dasar Teori

2.2.1 OSI Layer

OSI adalah referensi komunikasi dari Open System Interconnection. OSI model digunakan sebagai referensi untuk membahas spesifikasi protokol. OSI model terdiri dari 7 layer seperti pada tabel 1.

Layer #	Nama	Unit Enkapsulasi	Deskripsi/Fungsi
7	Application	Data	Mendefinisikan pelayanan (services) komunikasi pada suatu aplikasi
6	Presentation	Data	Mendefinisikan format data
5	Session	Data	Mendefinisikan memulai, pengontrolan dan mengakhiri komunikasi
4	Transport	Segment	Mendefinisikan jenis pengiriman
3	Network	Paket	Mendefinisikan pengiriman dari titik ke titik.
2	Data Link	Frame	Mendefinisikan cara pengaturan pengiriman data
1	Physical	bit	Mendifinisikan bentuk interface dari sebuah media transmisi


Tabel 1. OSI Layer

Dimana setiap layer memiliki fungsi dan contoh masing-masing.

2.2.2 TCP/IP Model

TCP/IP (singkatan dari Transmission Control Protocol/Internet Protocol), adalah gabungan dari protokol TCP dan IP sebagai sekelompok protokol yang mengatur komunikasi data dalam proses tukar-menukar data dari satu komputer ke komputer lain di dalam jaringan Internet yang akan memastikan pengiriman data sampai ke alamat yang dituju. Protokol ini tidaklah dapat berdiri sendiri, karena memang protokol ini berupa kumpulan protokol (Protocol Suite).

Arsitektur TCP/IP tidaklah berbasis OSI Layer, tetapi menggunakan model referensi DARPA. Seperti pada gambar 11., TCP/IP mengimplementasikan arsitektur berlapis yang terdiri atas empat lapis. Empat lapis ini, dapat dipetakan terhadap model OSI layer. Empat lapis ini, disebut juga DARPA Model atau DOD Model.

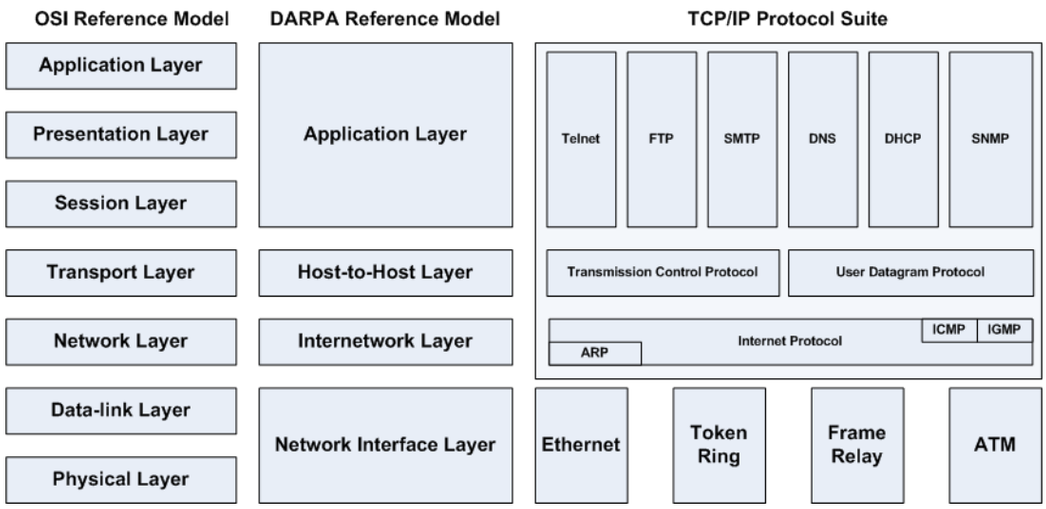

Gambar 11. OSI Layer vs TCP/IP Protocol Suite.

2.3 Pengenalan Aplikasi

2.3.1 Wireshark

Wireshark adalah aplikasi penganalisa paket jaringan (Network Packet Analyzer). Sebuah software penganalisa paket jaringan yang bekerja dengan cara menangkap paket jaringan dan mencoba untuk menampilkan data paket yang tertangkap dengan detail.
Wireshark bersifat open source. Contoh
penggunaan wireshark:
- Administrator jaringan menggunakan untuk melakukan penangan masalah jaringan
- Network security engineer menggunakan untuk memeriksa keamanan jaringan
- Developer menggunakan untuk melakukan debug pada implementasi protokol
- Umum digunakan untuk mempelajari internal protokol jaringan

Wireshark memiliki fitur:
- Tersedia untuk UNIX dan Windows.
- Menangkap paket data langsung dari network interface.
- Tampilan paket dengan informasi protokol yang sangat rinci.
- Open dan Save data paket yang dicapture.
- Import dan Eksport paket data dari dank e banyak program capture lainnya.
- Menyaring paket data dengan berbagai macam kriteria.
- Warnai layar paket berdasarkan filter.

2.3.2 Cara penggunaan Wireshark

Langkah-langkah menggunakan wireshark


1. Klik ikon…




2. Kemudian akan tampil aplikasi wireshark dengan diawali spash screen.




3. Tampilan awal program Wireshark.

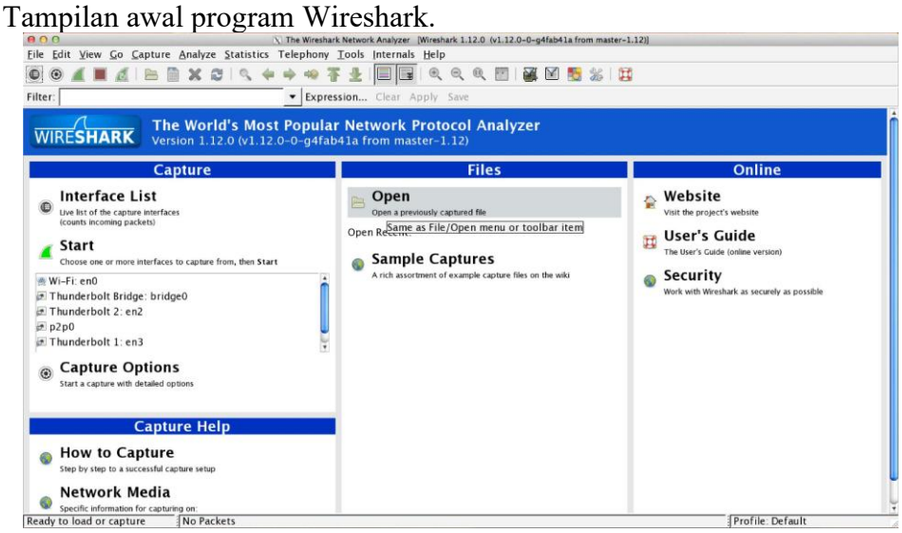


4. Keterangan menu wireshark.

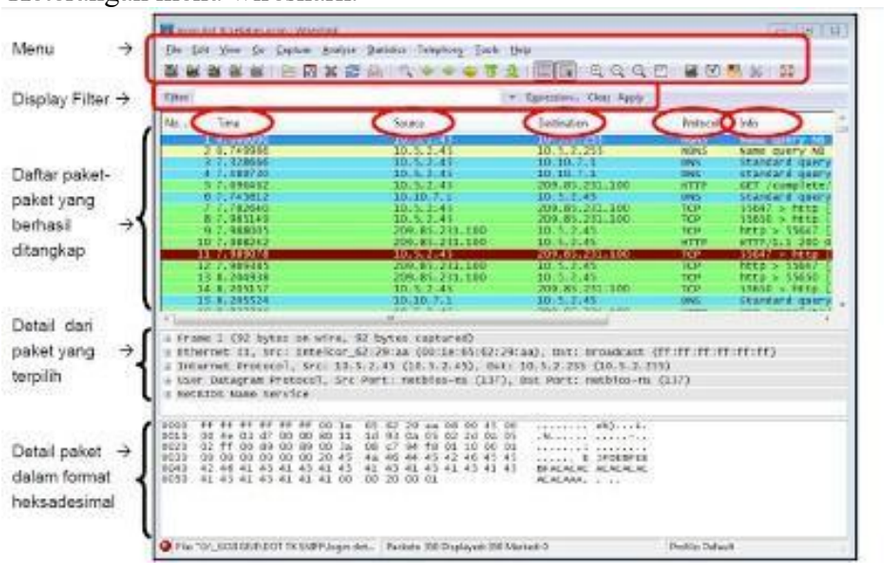


5. Melakukan CAPTURE data menggunakan wireshark. Pilih menu INTERFACE.

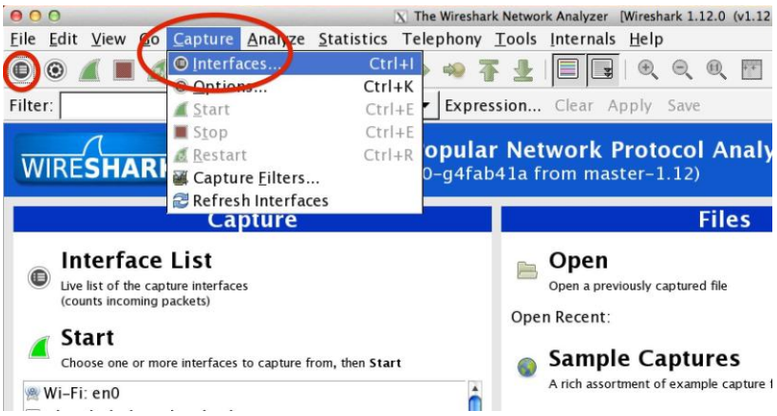

6. Pilih interface yang kita gunakan, kemudian klik start.

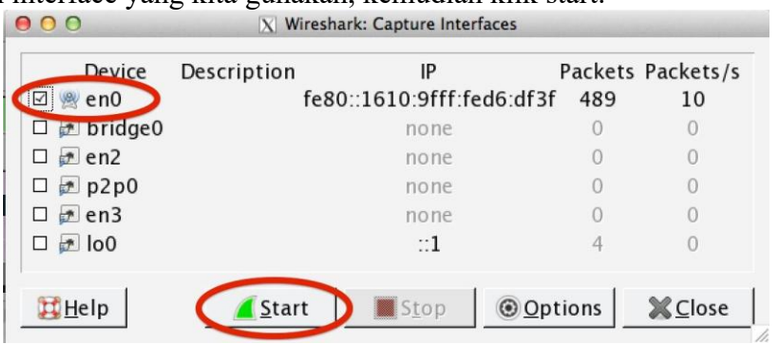


7. Setelah mengaktifkan interfaces, Wireshark akan beraksi membaca semua data yang berada di jaringan.

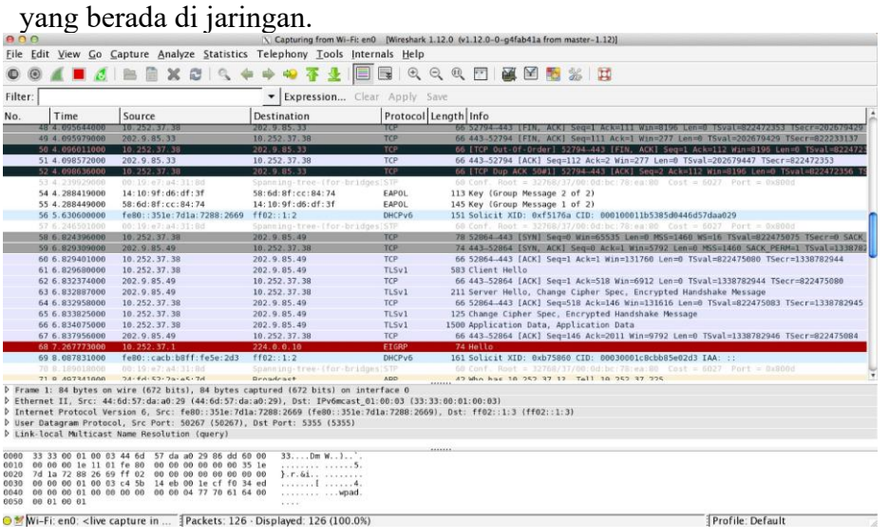


Terlihat banyak data yang dapat dicapture.
Keterangan:

Source	Alamat IP pengirim
Destination	Alamat IP tujuan
Protocol	Jenis protokol yang digunakan, seperti TCP, DHCP, dll
Length	Panjang data yang dikirimkan
Info	Informasi isi data yang dikirimkan

8. Ketikkan ICMP pada filter box untuk melakukan penyaringan data yang akan ditampilkan sehingga hanya data PING yang akan ditampilkan.

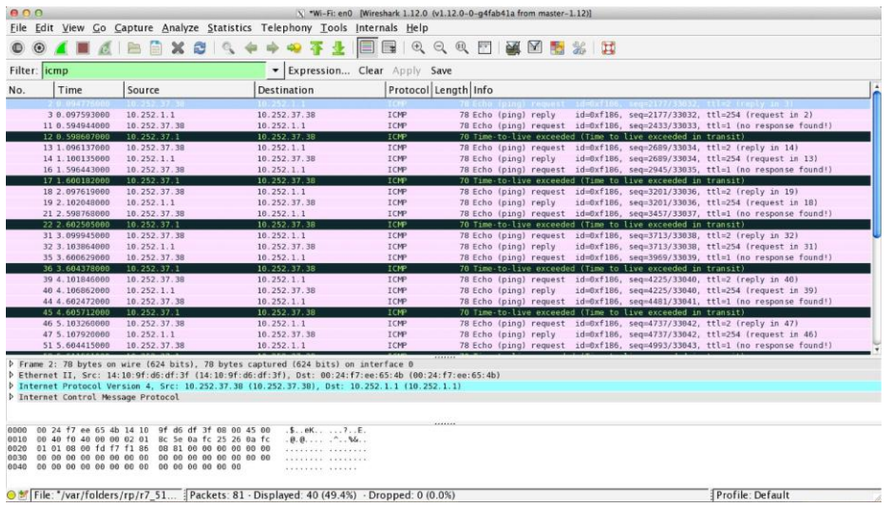

9. Penjelasan data

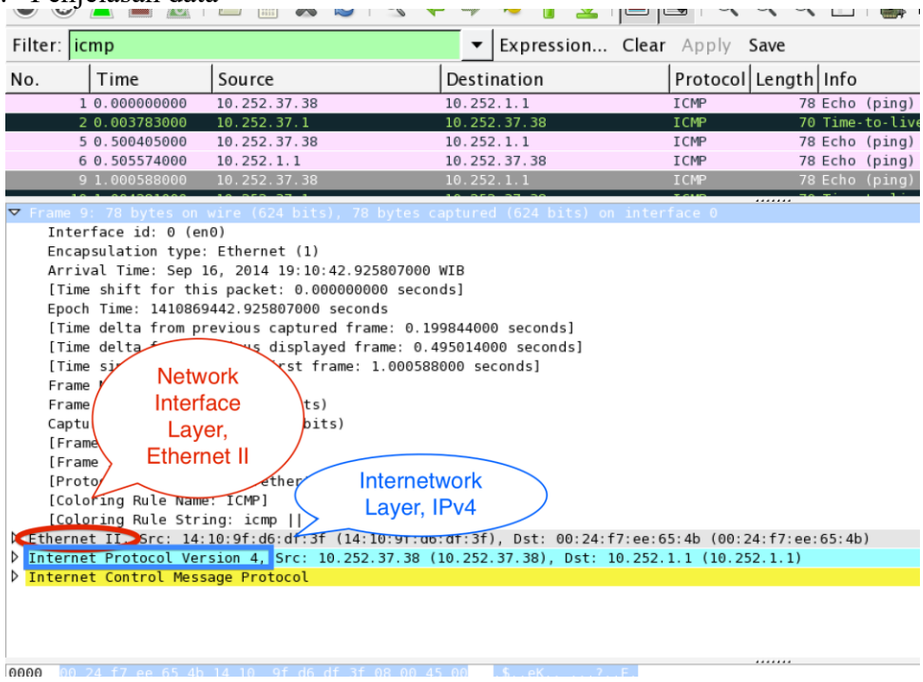

2.4 Persiapan Praktikum

1. Modul praktikum
2. PC yang dilengkapi dengan aplikasi Wireshark
3. Jaringan aktif
4. Lembar Laporan Praktikum (Lampiran)
5. Koneksi LAN dan Internet

2.5 Langkah-langkah Praktikum

2.5.1 Menjalankan aplikasi wireshark

1. Mahasiswa melakukan pengecekan apakah pada PC yang dipakai sudah terinstall aplikasi wireshark ?!!

2. Apabila belum terinstall, mahasiswa harus melakukan installasi di PC yang digunakan !!!

   Untuk OS Linux Debian/Ubuntu: dhoto@mypc $
   su
   root@mypc # apt-get install wireshark

   Untuk OSX:
   - Download wireshark dan XQuartz
   - Lakukan konfigurasi XQuartz pada wireshark

   Untuk Windows:
   - Download wireshark
   - Klik 2x pada installer wireshark

3. Klik ikon Wireshark !!!
4. Klik pada menu CAPTURE dan memilih INTERFACES.
5. Pilih interface yang akan digunakan untuk mengrekam data.
6. Klik Start.
7. Pada OS linux, jalankan aplikasi TERMINAL dan ketik perintah PING yang digunakan untuk melakukan pengecekan jaringan (tanpa tanda $):
   $ ping 10.252.1.1
8. Kembali ke aplikasi wireshark, hentikan rekam data dengan cara klik tombol merah pada wireshark. Ambil data untuk jenis tipe: icmp dengan cara memfilter di aplikasi wireshark dan lakukan screen shot pada tampilan wireshark yang kalian gunakan.

2.5.2 Melakukan rekam data untuk jenis protokol tertentu

1. Lakukan praktikum seperti kegiatan 2.5.1 dari nomer 4 s/d 8.
2. Ganti kegiatan pada no 7, dengan kegiatan berikut:
   a. Jalankan aplikasi terminal dan ketik perintah NSLOOKUP yang digunakan untuk mengetahui IP dari suatu tujuan (tanpa tanda $):
      $ nslookup www.pens.ac.id
      Ambil data untuk jenis tipe: dns
   b. Jalankan aplikasi web browser dan arahkan ke alamat:
      ftp://newfs.pens.ac.id
      Download salah satu data yang ada di alamat tersebut !!!
      Ambil data untuk jenis tipe: ftp
   c. Jalankan aplikasi web browser dan arahkan ke alamat:
      http://www.pens.ac.id
      Ambil data untuk jenis tipe: http
3. Untuk masing-masing kegiatan diatas, laporkan data yang telah direkam sesuai dengan layer pada TCP/IP model. Gunakan lembar **Laporan praktikum 2. TCP/IP Model**. (Lampiran)

2.6 Lampiran

Laporan praktikum 2. TCP/IP Model

Kegiatan : Identifikasi Osi Layer DNS
Nama : Achmad Farel
NRP : 5325600047

Data layer

Application layer

```
Domain Name System (query)
    Transaction ID: 0x88ee
    Flags: 0x0100 Standard query
        0... .... .... .... = Response: Message is a query
        .000 0... .... .... = Opcode: Standard query (0)
        .... ..0. .... .... = Truncated: Message is not truncated
        .... ...1 .... .... = Recursion desired: Do query recursively
        .... .... .0.. .... = Z: reserved (0)
        .... .... ...0 .... = Non-authenticated data: Unacceptable
    Questions: 1
    Answer RRs: 0
    Authority RRs: 0
    Additional RRs: 0
    Queries
        api.reasonsecurity.com: type A, class IN
            Name: api.reasonsecurity.com
            [Name Length: 22]
            [Label Count: 3]
            Type: A (1) (Host Address)
            Class: IN (0x0001)
    [Response In: 587]
```

Host-to-host layer

```
User Datagram Protocol, Src Port: 61788, Dst Port: 53
    Source Port: 61788
    Destination Port: 53
    Length: 48
    Checksum: 0x1063 [unverified]
    [Checksum Status: Unverified]
    [Stream index: 230]
    [Stream Packet Number: 1]
    [Timestamps]
        [Time since first frame: 0.000000000 seconds]
        [Time since previous frame: 0.000000000 seconds]
    UDP payload (40 bytes)
```

Internetwork layer

```
Internet Protocol Version 4, Src: 10.252.134.110, Dst: 10.252.128.3
    0100 .... = Version: 4
    .... 0101 = Header Length: 20 bytes (5)
    Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
        0000 00.. = Differentiated Services Codepoint: Default (0)
        .... ..00 = Explicit Congestion Notification: Not ECN-Capable Transport (0)
    Total Length: 68
    Identification: 0x5096 (20630)
    000. .... = Flags: 0x0
        0... .... = Reserved bit: Not set
        .0.. .... = Don't fragment: Not set
        ..0. .... = More fragments: Not set
    ...0 0000 0000 0000 = Fragment Offset: 0
    Time to Live: 128
    Protocol: UDP (17)
    Header Checksum: 0xcda9 [validation disabled]
    [Header checksum status: Unverified]
    Source Address: 10.252.134.110
    Destination Address: 10.252.128.3
    [Stream index: 177]
```

Network Interface layer

```
Ethernet II, Src: AzureWaveTec_cc:4a:58 (50:bb:b5:cc:4a:58), Dst: VMware_9f:e1:85
(00:50:56:9f:e1:85)
    Destination: VMware_9f:e1:85 (00:50:56:9f:e1:85)
        .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
        .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
    Source: AzureWaveTec_cc:4a:58 (50:bb:b5:cc:4a:58)
        .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
        .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
    Type: IPv4 (0x0800)
    [Stream index: 9]
```

== http://lecturer.pens.ac.id/~dhoto ==

Laporan praktikum 2. TCP/IP Model

Kegiatan : Identifikasi Osi Layer FTP

Nama : Achmad Farel

NRP : 5325600047

Data layer

Application layer

```
File Transfer Protocol (FTP)
    RETR .jellyfin.png\r\n
        Request command: RETR
        Request arg: .jellyfin.png
[Current working directory: ]
[Command response frames: 83]
[Command response bytes: 102063]
[Command response first frame: 7818]
[Command response last frame: 7924]
[Response duration: 91ms]
[Response bitrate: 8972Kbps]
[Setup frame: 7656]
```

```
Transmission Control Protocol, Src Port: 64966, Dst Port: 21, Seq: 30, Ack: 30, Len: 20
    Source Port: 64966
    Destination Port: 21
    [Stream index: 11]
    [Stream Packet Number: 4]
    [Conversation completeness: Incomplete (12)]
        ..0. .... = RST: Absent
        ...0 .... = FIN: Absent
        .... 1... = Data: Present
        .... .1.. = ACK: Present
        .... ..0. = SYN-ACK: Absent
        .... ...0 = SYN: Absent
        [Completeness Flags: ··DA··]
    [TCP Segment Len: 20]
    Sequence Number: 30    (relative sequence number)
    Sequence Number (raw): 652968667
    [Next Sequence Number: 50    (relative sequence number)]
    Acknowledgment Number: 30    (relative ack number)
    Acknowledgment number (raw): 173820291
    0101 .... = Header Length: 20 bytes (5)
    Flags: 0x018 (PSH, ACK)
        000. .... .... = Reserved: Not set
        ...0 .... .... = Accurate ECN: Not set
        .... 0... .... = Congestion Window Reduced: Not set
        .... .0.. .... = ECN-Echo: Not set
        .... ..0. .... = Urgent: Not set
        .... ...1 .... = Acknowledgment: Set
        .... .... 1... = Push: Set
        .... .... .0.. = Reset: Not set
        .... .... ..0. = Syn: Not set
        .... .... ...0 = Fin: Not set
        [TCP Flags: ·····AP···]
    Window: 253
    [Calculated window size: 253]
    [Window size scaling factor: -1 (unknown)]
    Checksum: 0xd827 [unverified]
    [Checksum Status: Unverified]
    Urgent Pointer: 0
    [Timestamps]
        [Time since first frame in this TCP stream: 94.208400 milliseconds]
        [Time since previous frame in this TCP stream: 411.700 microseconds]
    [SEQ/ACK analysis]
        [This is an ACK to the segment in frame: 7697]
        [The RTT to ACK the segment was: 411.700 microseconds]
        [Bytes in flight: 20]
        [Bytes sent since last PSH flag: 20]
    [Client Contiguous Streams: 1]
    [Server Contiguous Streams: 1]
    TCP payload (20 bytes)
```

Internetwork layer

```
Internet Protocol Version 4, Src: 10.252.134.110, Dst: 202.9.85.80
    0100 .... = Version: 4
    .... 0101 = Header Length: 20 bytes (5)
    Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
        0000 00.. = Differentiated Services Codepoint: Default (0)
        .... ..00 = Explicit Congestion Notification: Not ECN-Capable Transport (0)
    Total Length: 60
    Identification: 0x3b7d (15229)
    010. .... = Flags: 0x2, Don't fragment
        0... .... = Reserved bit: Not set
        .1.. .... = Don't fragment: Set
        ..0. .... = More fragments: Not set
    ...0 0000 0000 0000 = Fragment Offset: 0
    Time to Live: 128
    Protocol: TCP (6)
    Header Checksum: 0x0e7b [validation disabled]
    [Header checksum status: Unverified]
    Source Address: 10.252.134.110
    Destination Address: 202.9.85.80
    [Stream index: 354]
```

Network Interface layer

```
Ethernet II, Src: AzureWaveTec_cc:4a:58 (50:bb:b5:cc:4a:58), Dst: VMware_b5:55:03
(00:50:56:b5:55:03)
    Destination: VMware_b5:55:03 (00:50:56:b5:55:03)
        .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
        .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
    Source: AzureWaveTec_cc:4a:58 (50:bb:b5:cc:4a:58)
        .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
        .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
    Type: IPv4 (0x0800)
    [Stream index: 566]
```

== http://lecturer.pens.ac.id/~dhoto ==

Laporan praktikum 2. TCP/IP Model

Kegiatan : Identifikasi Osi Layer HTTP

Nama : Achmad Farel

NRP : 5325600047

Data layer

Application layer

```
Hypertext Transfer Protocol
    HTTP/1.1 301 Moved Permanently\r\n
        Response Version: HTTP/1.1
        Status Code: 301
        [Status Code Description: Moved Permanently]
        Response Phrase: Moved Permanently
    Server: nginx\r\n
    Date: Tue, 13 Oct 2026 09:34:01 GMT\r\n
    Content-Type: text/html\r\n
    Content-Length: 162\r\n
        [Content length: 162]
    Connection: keep-alive\r\n
    Location: https://www.pens.ac.id/\r\n
    \r\n
    [Request in frame: 12354]
    [Time since request: 8.669700 milliseconds]
    [Request URI: /]
    [Full request URI: http://www.pens.ac.id/]
    File Data: 162 bytes
```

```
Transmission Control Protocol, Src Port: 80, Dst Port: 59561, Seq: 1, Ack: 79, Len: 353
    Source Port: 80
    Destination Port: 59561
    [Stream index: 11]
    [Stream Packet Number: 6]
    [Conversation completeness: Complete, WITH_DATA (31)]
        ..0. .... = RST: Absent
        ...1 .... = FIN: Present
        .... 1... = Data: Present
        .... .1.. = ACK: Present
        .... ..1. = SYN-ACK: Present
        .... ...1 = SYN: Present
        [Completeness Flags: ·FDASS]
    [TCP Segment Len: 353]
    Sequence Number: 1    (relative sequence number)
    Sequence Number (raw): 2188396337
    [Next Sequence Number: 354    (relative sequence number)]
    Acknowledgment Number: 79    (relative ack number)
    Acknowledgment number (raw): 3828372339
    0101 .... = Header Length: 20 bytes (5)
    Flags: 0x018 (PSH, ACK)
        000. .... .... = Reserved: Not set
        ...0 .... .... = Accurate ECN: Not set
        .... 0... .... = Congestion Window Reduced: Not set
        .... .0.. .... = ECN-Echo: Not set
        .... ..0. .... = Urgent: Not set
        .... ...1 .... = Acknowledgment: Set
        .... .... 1... = Push: Set
        .... .... .0.. = Reset: Not set
        .... .... ..0. = Syn: Not set
        .... .... ...0 = Fin: Not set
        [TCP Flags: ·····AP···]
    Window: 502
    [Calculated window size: 64256]
    [Window size scaling factor: 128]
    Checksum: 0x5e30 [unverified]
    [Checksum Status: Unverified]
    Urgent Pointer: 0
    [Timestamps]
        [Time since first frame in this TCP stream: 21.163900 milliseconds]
        [Time since previous frame in this TCP stream: 1.100 microseconds]
    [SEQ/ACK analysis]
        [iRTT: 8.709200 milliseconds]
        [Bytes in flight: 353]
        [Bytes sent since last PSH flag: 353]
    [Client Contiguous Streams: 1]
    [Server Contiguous Streams: 1]
    TCP payload (353 bytes)
```

Internetwork layer

```
Internet Protocol Version 4, Src: 202.9.85.176, Dst: 10.252.134.110
    0100 .... = Version: 4
    .... 0101 = Header Length: 20 bytes (5)
    Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
        0000 00.. = Differentiated Services Codepoint: Default (0)
        .... ..00 = Explicit Congestion Notification: Not ECN-Capable Transport (0)
    Total Length: 393
    Identification: 0x8f55 (36693)
    010. .... = Flags: 0x2, Don't fragment
        0... .... = Reserved bit: Not set
        .1.. .... = Don't fragment: Set
        ..0. .... = More fragments: Not set
    ...0 0000 0000 0000 = Fragment Offset: 0
    Time to Live: 63
    Protocol: TCP (6)
    Header Checksum: 0xf9f5 [validation disabled]
    [Header checksum status: Unverified]
    Source Address: 202.9.85.176
    Destination Address: 10.252.134.110
    [Stream index: 356]
```

Network Interface layer

```
Ethernet II, Src: Cisco_bb:fa:06 (c8:28:e5:bb:fa:06), Dst: AzureWaveTec_cc:4a:58
(50:bb:b5:cc:4a:58)
    Destination: AzureWaveTec_cc:4a:58 (50:bb:b5:cc:4a:58)
        .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
        .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
    Source: Cisco_bb:fa:06 (c8:28:e5:bb:fa:06)
        .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
        .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
    Type: IPv4 (0x0800)
    [Stream index: 122]
```

== http://lecturer.pens.ac.id/~dhoto ==

Laporan praktikum 2. TCP/IP Model

Kegiatan : Identifikasi Osi Layer ICMP/PING

Nama : Achmad Farel

NRP : 5325600047

Data layer

Application layer

```
Internet Control Message Protocol
    Type: Echo (ping) reply (0)
    Code: 0
    Checksum: 0x5557 [correct]
    [Checksum Status: Good]
    Identifier (BE): 1 (0x0001)
    Identifier (LE): 256 (0x0100)
    Sequence Number (BE): 4 (0x0004)
    Sequence Number (LE): 1024 (0x0400)
    [Request frame: 11556]
    [Response time: 11,125 ms]
    Data (32 bytes)
        Data: 6162636465666768696a6b6c6d6e6f707172737475767761626364656667686 9
        [Length: 32]
```

Host-to-host layer

Internetwork layer

```
Internet Protocol Version 4, Src: 10.252.1.1, Dst: 10.252.134.92
    0100 .... = Version: 4
    .... 0101 = Header Length: 20 bytes (5)
    Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
        0000 00.. = Differentiated Services Codepoint: Default (0)
        .... ..00 = Explicit Congestion Notification: Not ECN-Capable Transport (0)
    Total Length: 60
    Identification: 0xb3e9 (46057)
    000. .... = Flags: 0x0
        0... .... = Reserved bit: Not set
        .0.. .... = Don't fragment: Not set
        ..0. .... = More fragments: Not set
    ...0 0000 0000 0000 = Fragment Offset: 0
    Time to Live: 253
    Protocol: ICMP (1)
    Header Checksum: 0x6c82 [validation disabled]
    [Header checksum status: Unverified]
    Source Address: 10.252.1.1
    Destination Address: 10.252.134.92
    [Stream index: 542]
```

Network Interface layer

```
Ethernet II, Src: VMware_9f:e1:85 (00:50:56:9f:e1:85), Dst: AzureWaveTec_cc:4a:58
(50:bb:b5:cc:4a:58)
    Destination: AzureWaveTec_cc:4a:58 (50:bb:b5:cc:4a:58)
        .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
        .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
    Source: VMware_9f:e1:85 (00:50:56:9f:e1:85)
        .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
        .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
    Type: IPv4 (0x0800)
    [Stream index: 0]
```