**Low speed indicator** displays if GPS speed is less than 5 km/h. This might be useful for filtering data.
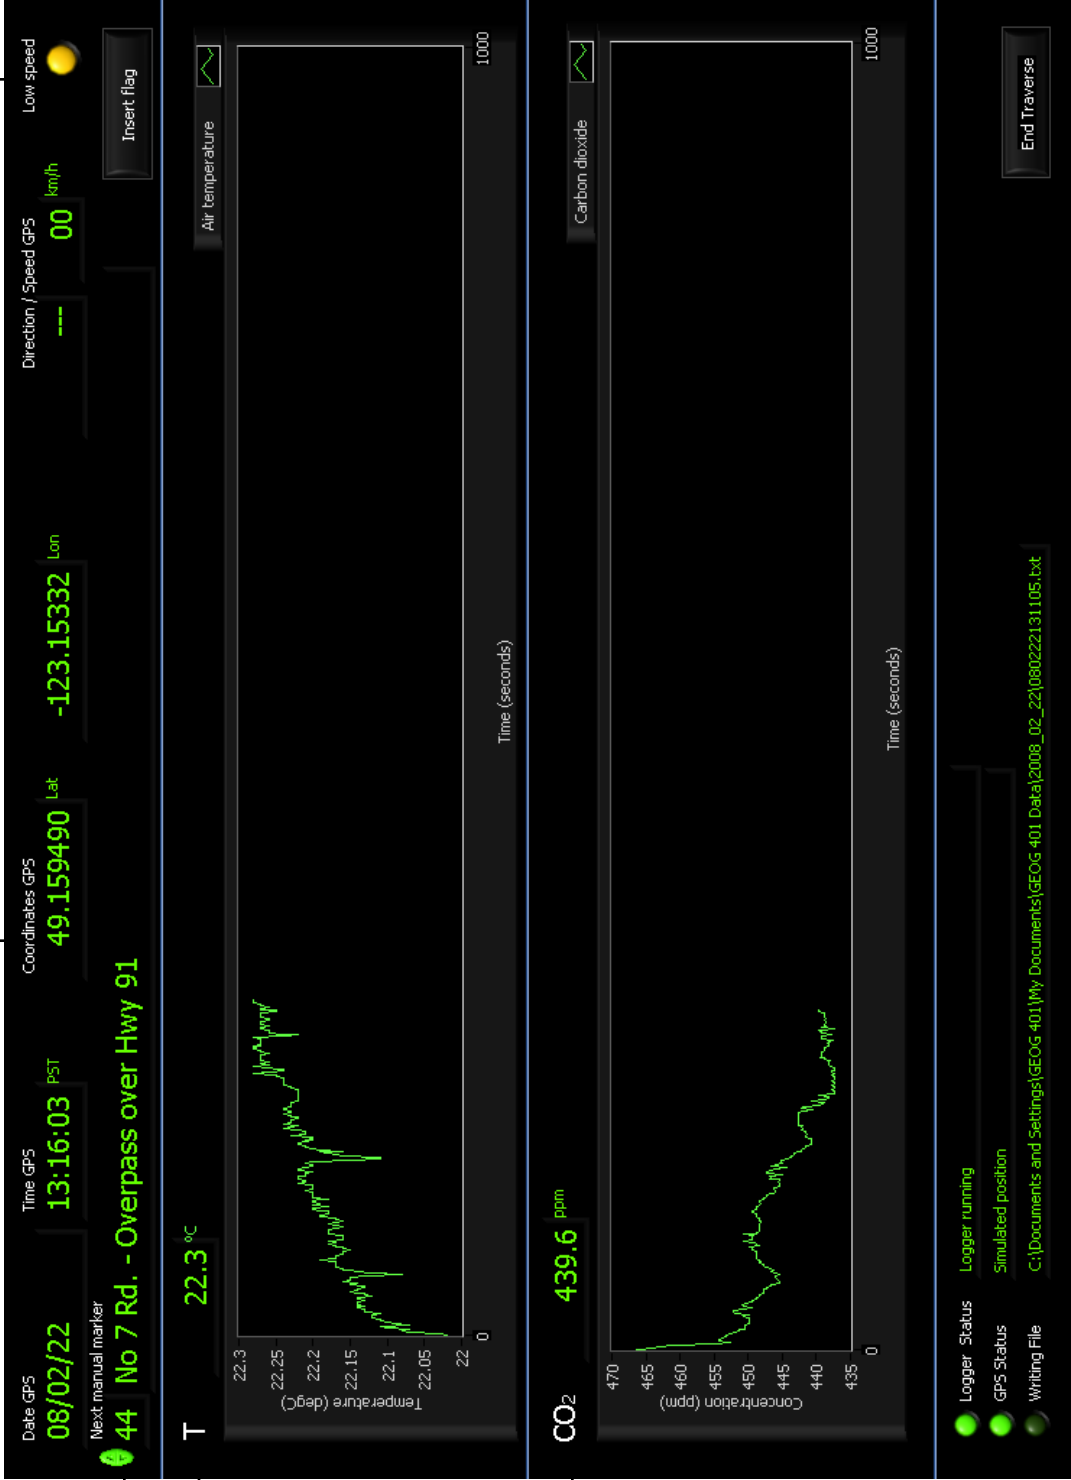
**Manual markers** allow you to insert the predefined marker points into the data-set when pressing the enter key on the keyboard. Text always display the next (upcoming) marker.

**GPS data** displays date, time, and if satellite reception is good also psoition, direction and speed.

**Temperature data** with current measurement (numeric) and graph of the last 8 minutes. Axes adjust dynamically.

**Carbon dioxide data** with current measurement (numeric) and graph of the last 8 minutes. Axes adjust dynamically.

**Status text** gives textual messages and errors on the logger, GPS and the file that is currently written.

**Status lights** indicate if the different components (Logger, GPS) are working correctly (green) or if there are any problems (red). 'Writing file' should flash green approximately every 15 seconds.

**End traverse** quits the program