Temperature RWA	-
Temperature HWA	23 °C

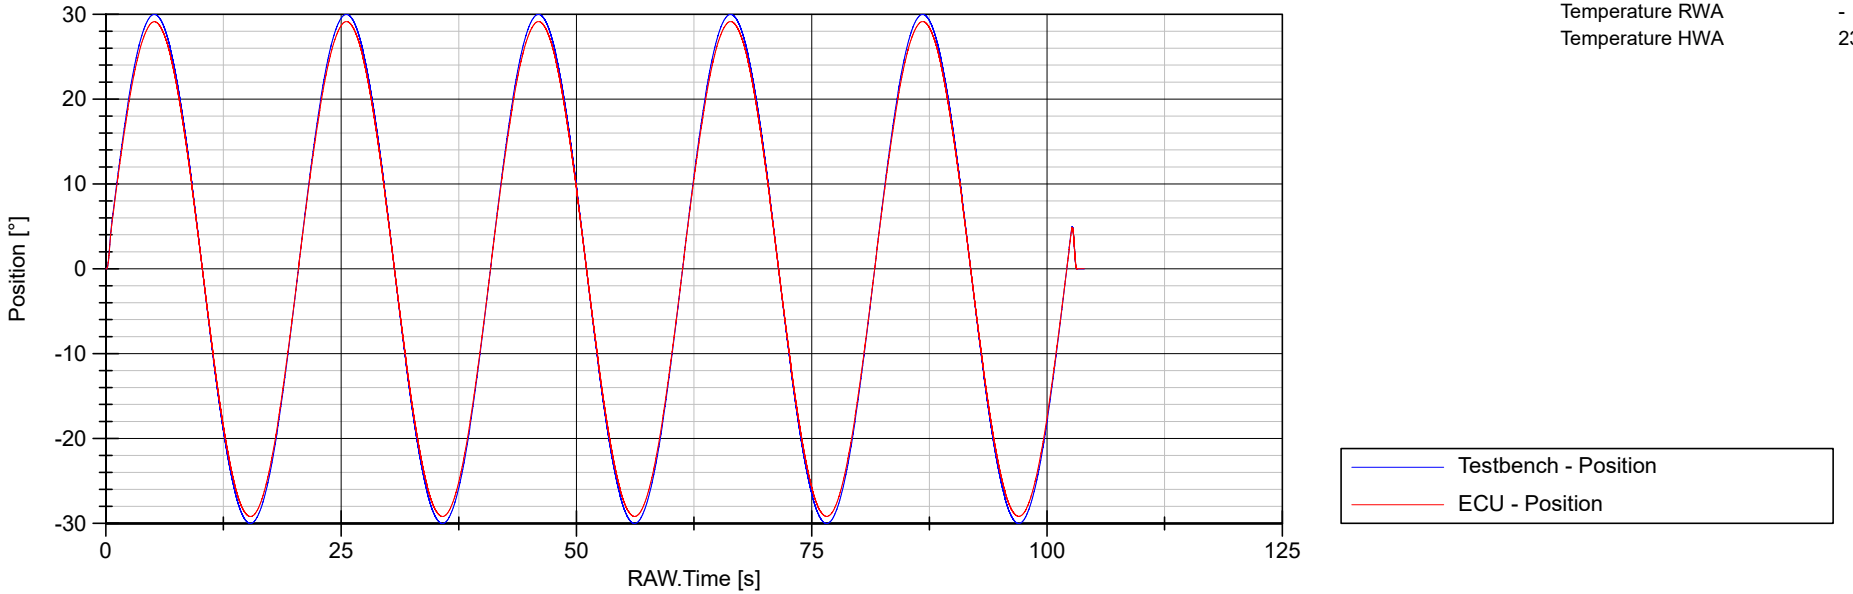

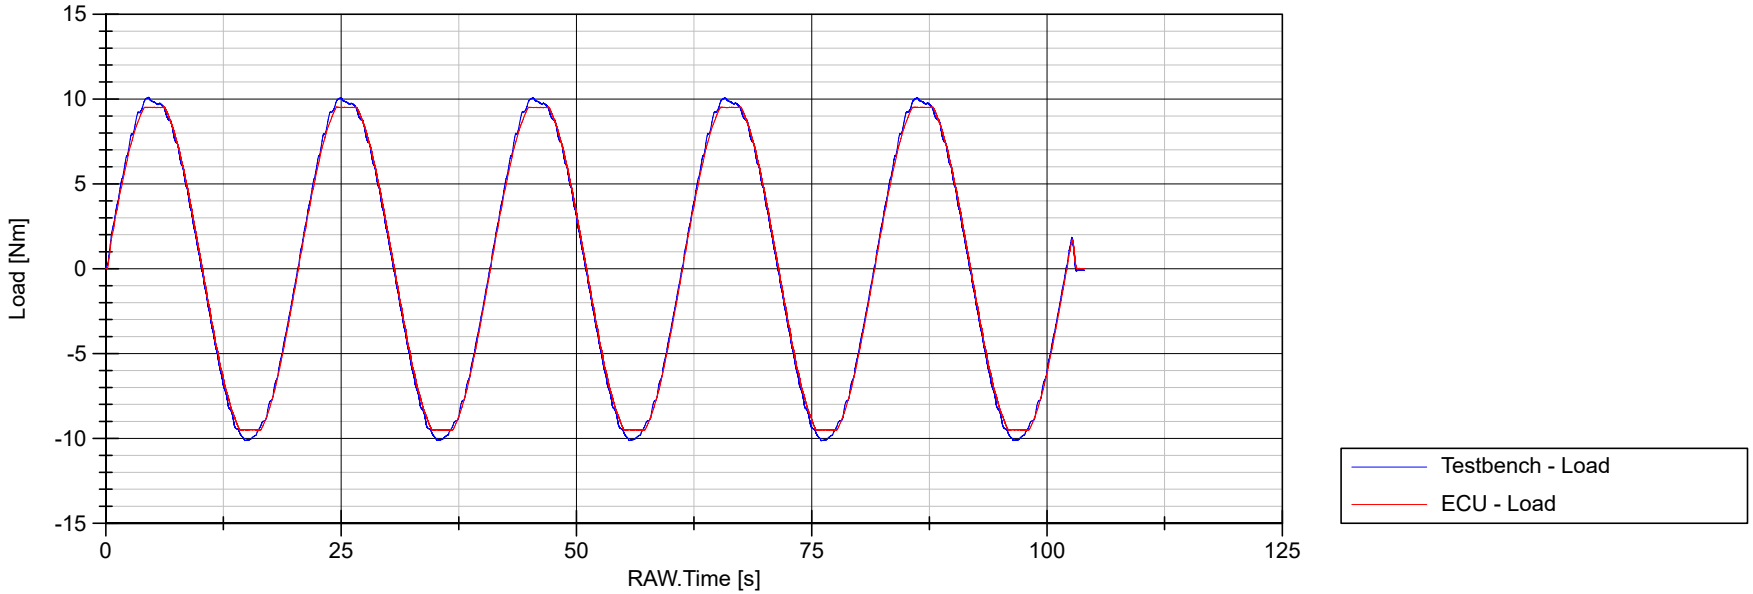

887
TK-P Testlab

thyssenkrupp

3.1.3Torque_Mode1 (7.1.3 Accuracy System Output (TorqueControl) W2W - only HWA)

Customer: HONDA
Project name: SbW HONDA GlobalBEV HWA NAFTA
Order:
ID number: HA-B05-HWA028
Remark: HWA

BeeCoreId: 654310
Drawing number: 2105910-020PT-A
Part description: HWA
Reason for test: 010_Aufbau
Production code / time: /

Business Unit: PCE
Insp. name: diepau
Date: 13.02.2024 14:52:27

CONFIDENTIAL

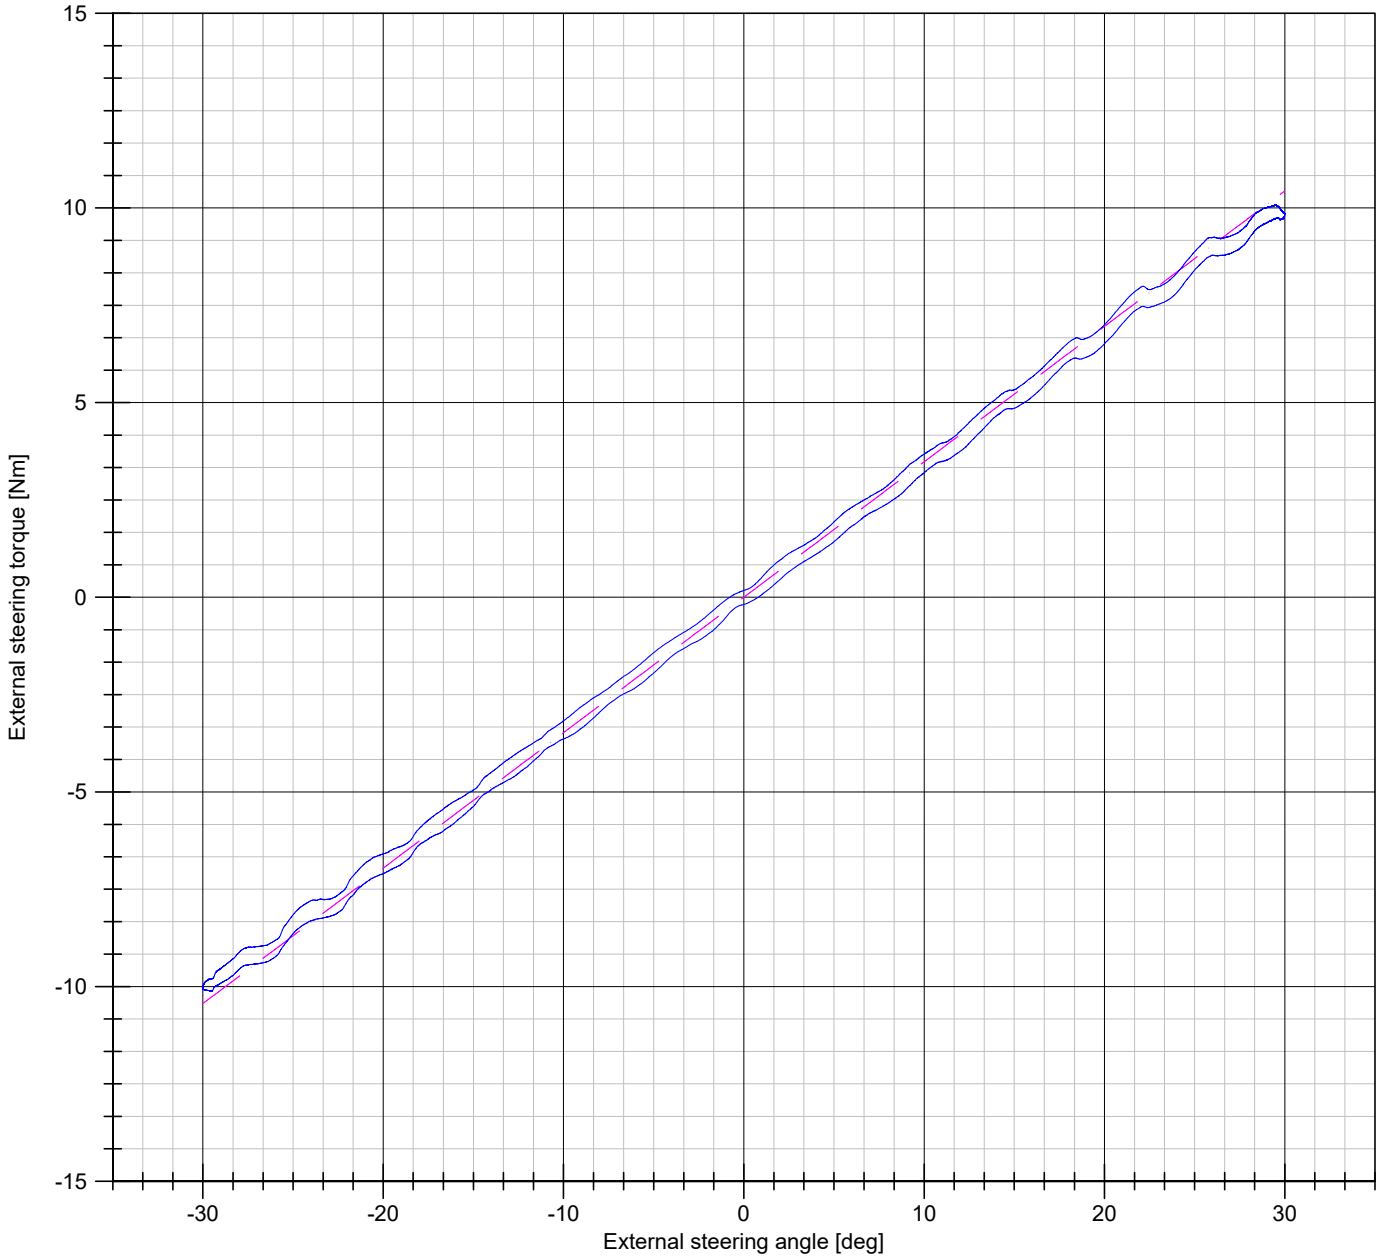

887
TK-P Testlab

thyssenkrupp

3.1.3Torque_Mode1 (7.1.3 Accuracy System Output (TorqueControl) W2W - only HWA)

Customer: HONDA
Project name: SbW HONDA GlobalBEV HWA NAFTA
Order:
ID number: HA-B05-HWA028
Remark: HWA

BeeCoreId: 654310
Drawing number: 2105910-020PT-A
Part description: HWA
Reason for test: 010_Aufbau
Production code / time: /

Business Unit: PCE
Insp. name: diepau
Date: 13.02.2024 14:52:27

CONFIDENTIAL

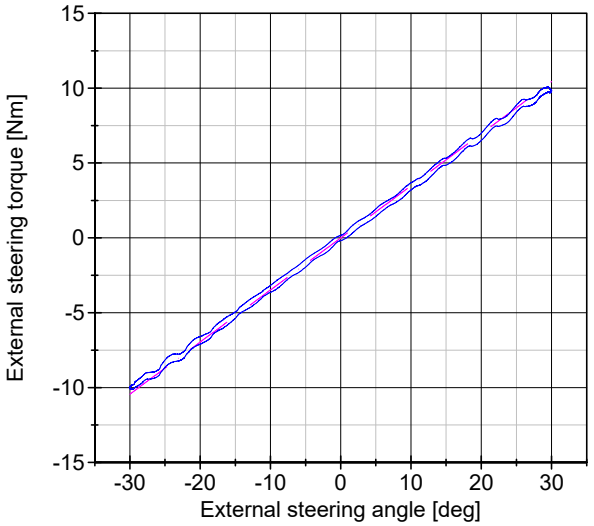

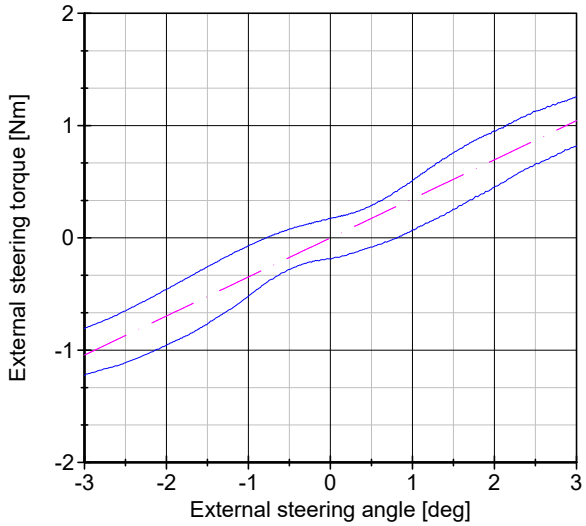

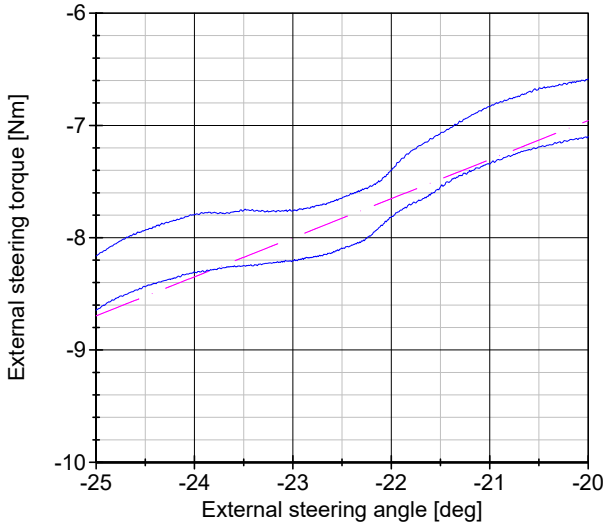

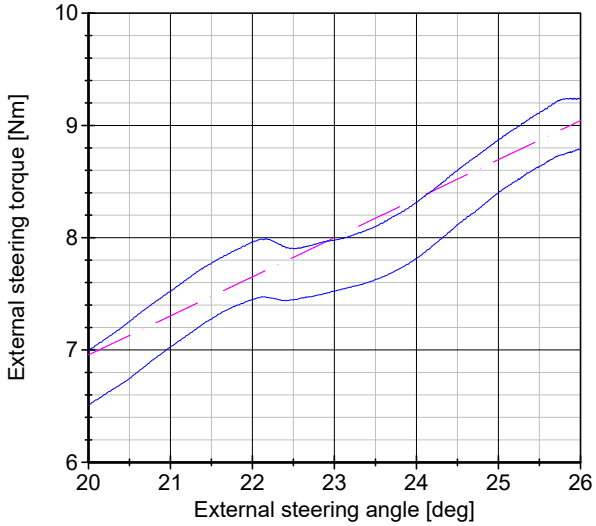

Results

1;1' (0 deg)

pos. hysteresis at 0 deg	0.17 Nm
pos. value at 0 [deg]	0.17 Nm
pos value at 0° - Limit	0.05 to 0.35 Nm
neg. hysteresis at 0 deg	0.19 Nm
neg. value at 0 [deg]	-0.19 Nm
neg value at 0° - Limit	-0.35 to -0.05 Nm

2; 2' (1 deg / -1 deg)

pos. hysteresis at 1 deg	0.16 Nm
pos. value at 1 [deg]	0.51 Nm
pos value at 1° - Limit	0.4 to 0.7 Nm
neg. hysteresis at -1 deg	0.17 Nm
neg. value at -1 [deg]	-0.52 Nm
neg value at 1° - Limit	-0.7 to -0.4 Nm

3; 3' (23 deg)

pos. hysteresis at 23 deg	0.02 Nm
pos. value at 23 [deg]	7.98 Nm
pos value at 23° - Limit	7.27 to 8.73 Nm
neg. hysteresis at 23 deg	0.47 Nm
neg. value at 23 [deg]	7.53 Nm
neg value at 23° - Limit	7.27 to 8.73 Nm

4; 4' (-23 deg)

pos. hysteresis at -23 deg	0.24 Nm
pos. value at -23 [deg]	-7.76 Nm
pos value at -23° - Limit	-8.73 to -7.27 Nm
neg. hysteresis at -23 deg	0.2 Nm
neg. value at -23 [deg]	-8.2 Nm
neg value at -23° - Limit	-8.73 to -7.27 Nm

3.1.3Torque_Mode1 (7.1.3 Accuracy System Output (TorqueControl) W2W - only HWA)

Customer: HONDA
Project name: SbW HONDA GlobalBEV HWA NAFTA
Order:
ID number: HA-B05-HWA028
Remark: HWA

BeeCoreId: 654310
Drawing number: 2105910-020PT-A
Part description: HWA
Reason for test: 010_Aufbau
Production code / time: /

Business Unit: PCE
Insp. name: diepau
Date: 13.02.2024 14:52:27

CONFIDENTIAL

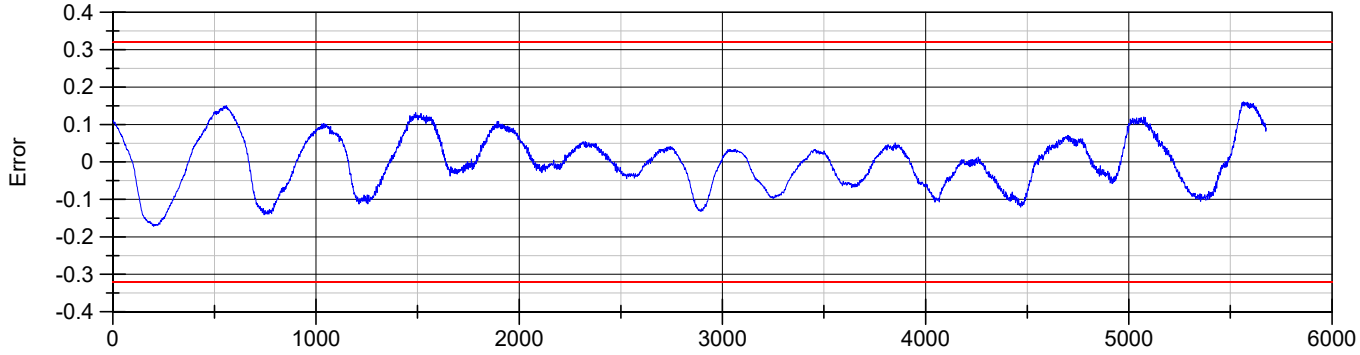

Results

max_error	0.19 Nm
max Error - Limit	-0.32 to 0.32 Nm
max_error_pos	0.17 Nm
max Error pos - Limit	-0.32 to 0.32 Nm

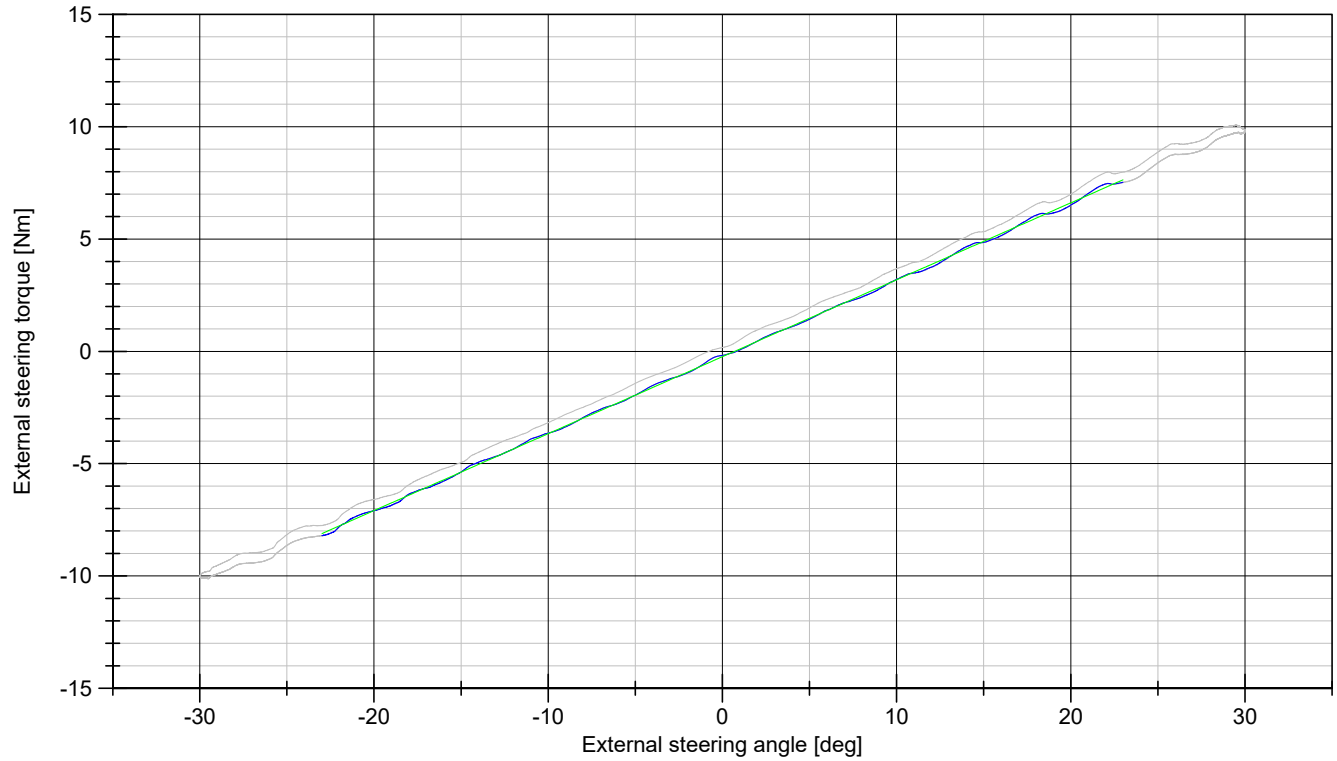

887
TK-P Testlab

thyssenkrupp

3.1.3Torque_Mode1 (7.1.3 Accuracy System Output (TorqueControl) W2W - only HWA)

Customer: HONDA
Project name: SbW HONDA GlobalBEV HWA NAFTA
Order:
ID number: HA-B05-HWA028
Remark: HWA

BeeCoreId: 654310
Drawing number: 2105910-020PT-A
Part description: HWA
Reason for test: 010_Aufbau
Production code / time: /

Business Unit: PCE
Insp. name: diepau
Date: 13.02.2024 14:52:27

CONFIDENTIAL

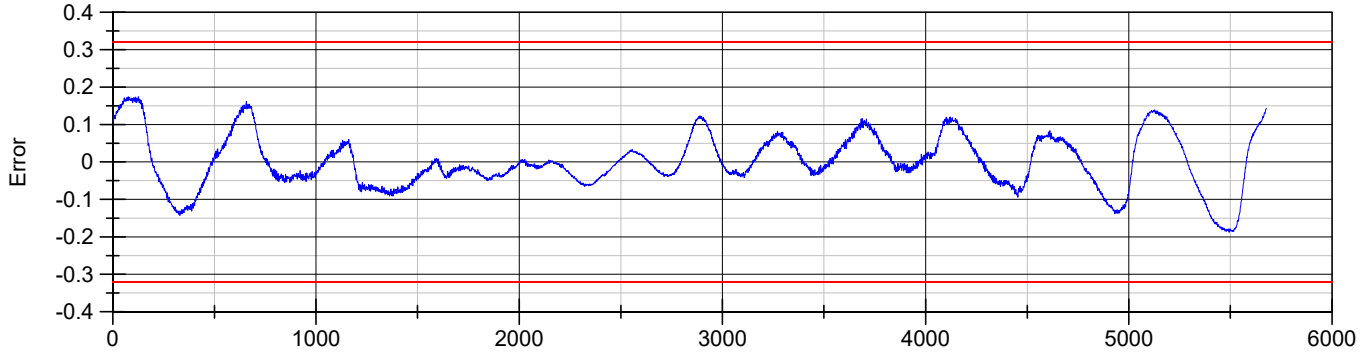

Results

max_error	0.19 Nm
max Error - Limit	-0.32 to 0.32 Nm
max_error_neg	0.19 Nm
max Error neg - Limit	-0.32 to 0.32 Nm

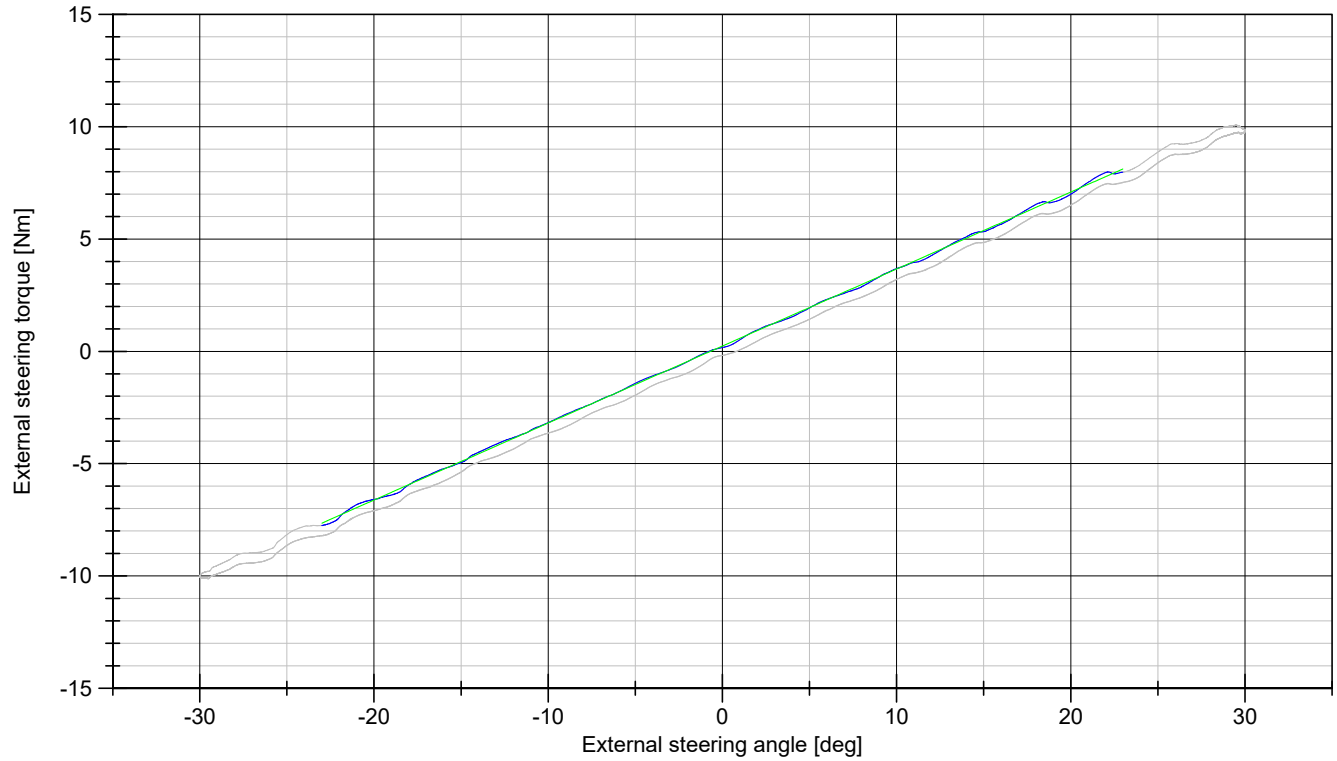

887
TK-P Testlab

thyssenkrupp

3.1.3Torque_Mode1 (7.1.3 Accuracy System Output (TorqueControl) W2W - only HWA)

Customer: HONDA
Project name: SbW HONDA GlobalBEV HWA NAFTA
Order:
ID number: HA-B05-HWA028
Remark: HWA

BeeCoreId: 654310
Drawing number: 2105910-020PT-A
Part description: HWA
Reason for test: 010_Aufbau
Production code / time: /

Business Unit: PCE
Insp. name: diepau
Date: 13.02.2024 14:52:27

CONFIDENTIAL

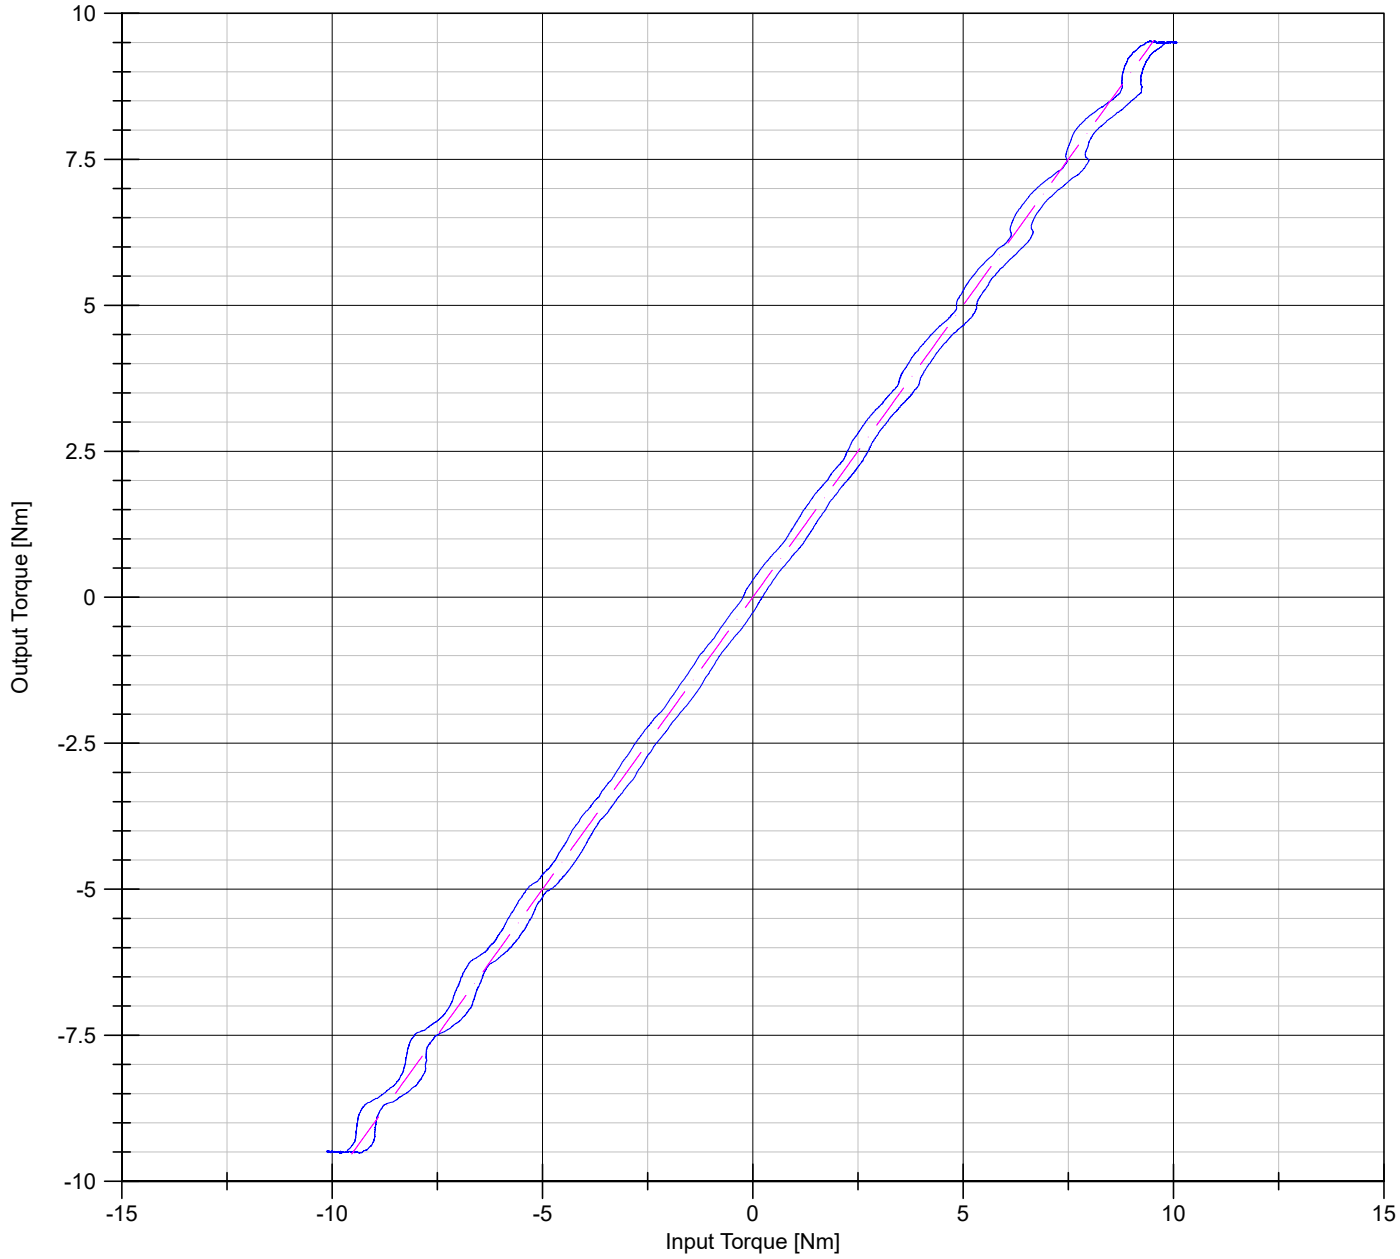

887
TK-P Testlab

thyssenkrupp

3.1.3Torque_Mode1 (7.1.3 Accuracy System Output (TorqueControl) W2W - only HWA)

Customer: HONDA
Project name: SbW HONDA GlobalBEV HWA NAFTA
Order:
ID number: HA-B05-HWA028
Remark: HWA

BeeCoreId: 654310
Drawing number: 2105910-020PT-A
Part description: HWA
Reason for test: 010_Aufbau
Production code / time: /

Business Unit: PCE
Insp. name: diepau
Date: 13.02.2024 14:52:27

CONFIDENTIAL

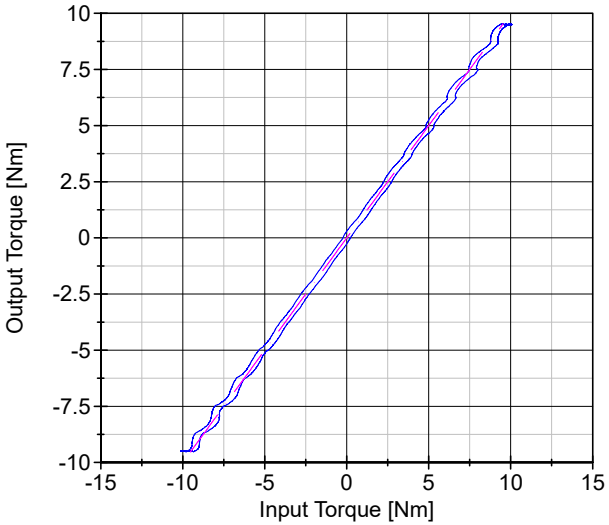

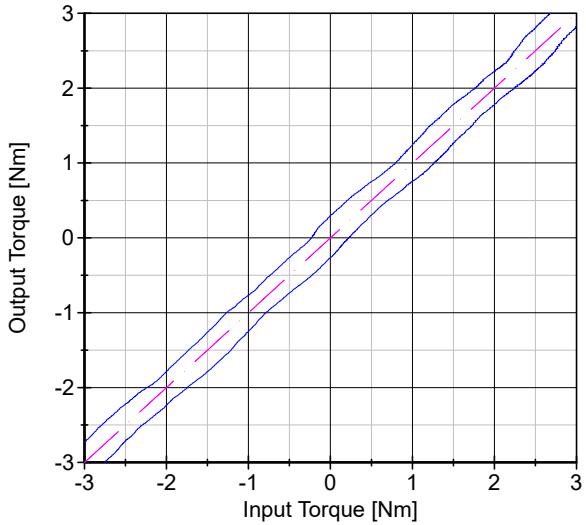

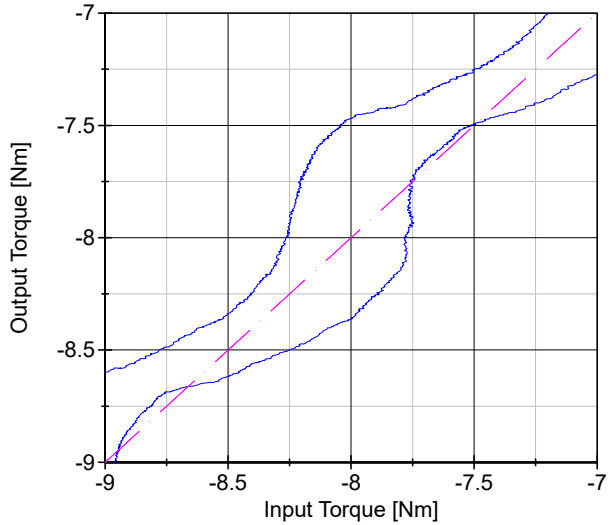

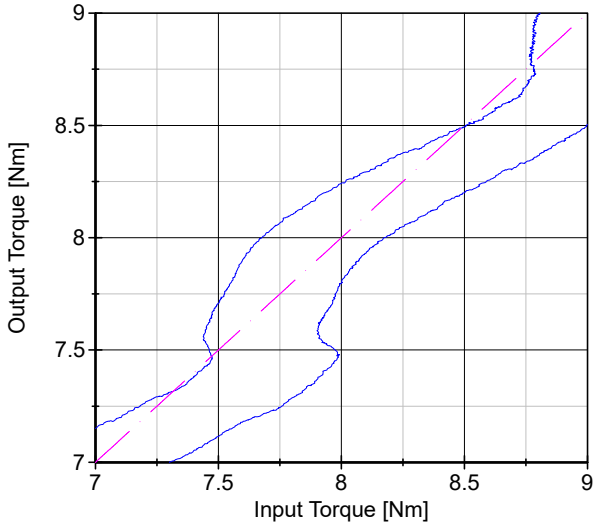

1 (+/- 0.45 Nm)

pos. value at 0 [Nm]	0.299 Nm
neg. value at 0 [Nm]	-0.263 Nm

2;2' (+/- 0.45 Nm)

pos. value at 0.4 [Nm]	0.67 Nm
neg. value at 0.4 [Nm]	0.198 Nm
pos. value at -0.4 [Nm]	-0.172 Nm
neg. value at -0.4 [Nm]	-0.646 Nm

3;3' (+/- 0.47 Nm)

pos. value at 1.5 [Nm]	1.784 Nm
neg. value at 1.5 [Nm]	1.26 Nm
pos. value at -1.5 [Nm]	-1.259 Nm
neg. value at -1.5 [Nm]	-1.787 Nm

4;4' (+/- 0.51 Nm)

pos. value at 2.5 [Nm]	2.811 Nm
neg. value at 2.5 [Nm]	2.222 Nm
pos. value at -2.5 [Nm]	-2.216 Nm
neg. value at -2.5 [Nm]	-2.703 Nm

5;5' (+/- 0.83 Nm)

pos. value at 8.0 [Nm]	8.244 Nm
neg. value at 8.0 [Nm]	7.797 Nm
pos. value at -8.0 [Nm]	-7.468 Nm
neg. value at -8.0 [Nm]	-8.356 Nm

3.1.3Torque_Mode1 (7.1.3 Accuracy System Output (TorqueControl) W2W - only HWA)

Customer: HONDA
Project name: SbW HONDA GlobalBEV HWA NAFTA
Order:
ID number: HA-B05-HWA028
Remark: HWA

BeeCoreId: 654310
Drawing number: 2105910-020PT-A
Part description: HWA
Reason for test: 010_Aufbau
Production code / time: /

Business Unit: PCE
Insp. name: diepau
Date: 13.02.2024 14:52:27

CONFIDENTIAL

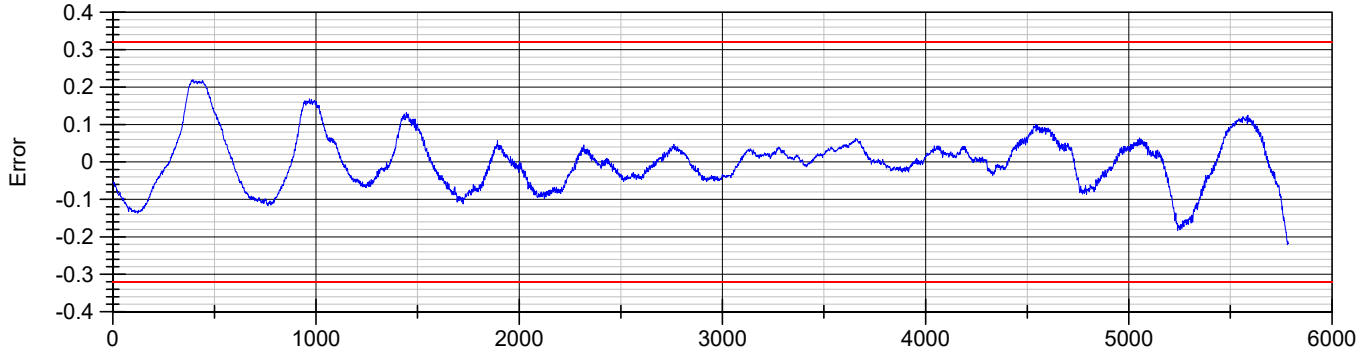

load_max_error	0.23 Nm
load max Error - Limit	-0.32 to 0.32 Nm
load_max_error_pos	0.22 Nm
load max Error pos - Limit	-0.32 to 0.32 Nm

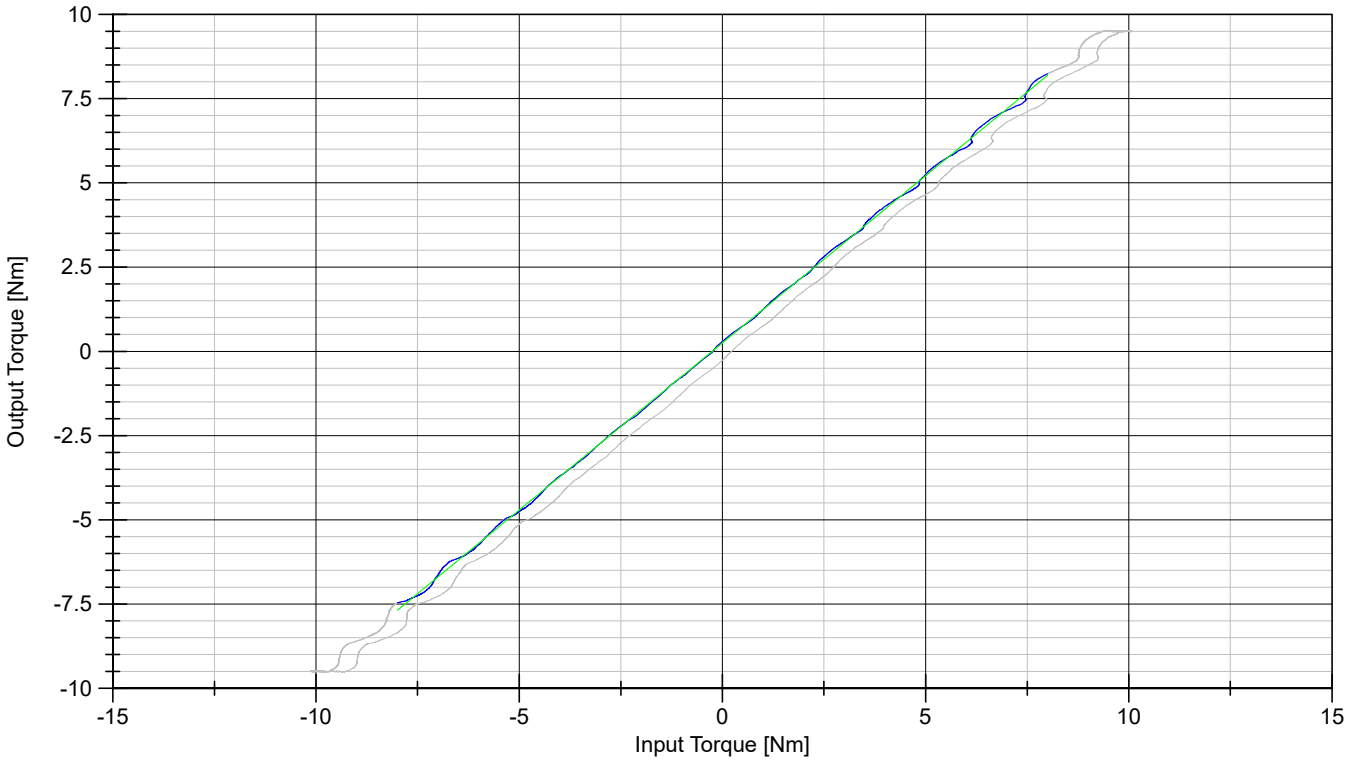

887
TK-P Testlab

thyssenkrupp

3.1.3Torque_Mode1 (7.1.3 Accuracy System Output (TorqueControl) W2W - only HWA)

Customer: HONDA
Project name: SbW HONDA GlobalBEV HWA NAFTA
Order:
ID number: HA-B05-HWA028
Remark: HWA

BeeCoreId: 654310
Drawing number: 2105910-020PT-A
Part description: HWA
Reason for test: 010_Aufbau
Production code / time: /

Business Unit: PCE
Insp. name: diepau
Date: 13.02.2024 14:52:27

CONFIDENTIAL

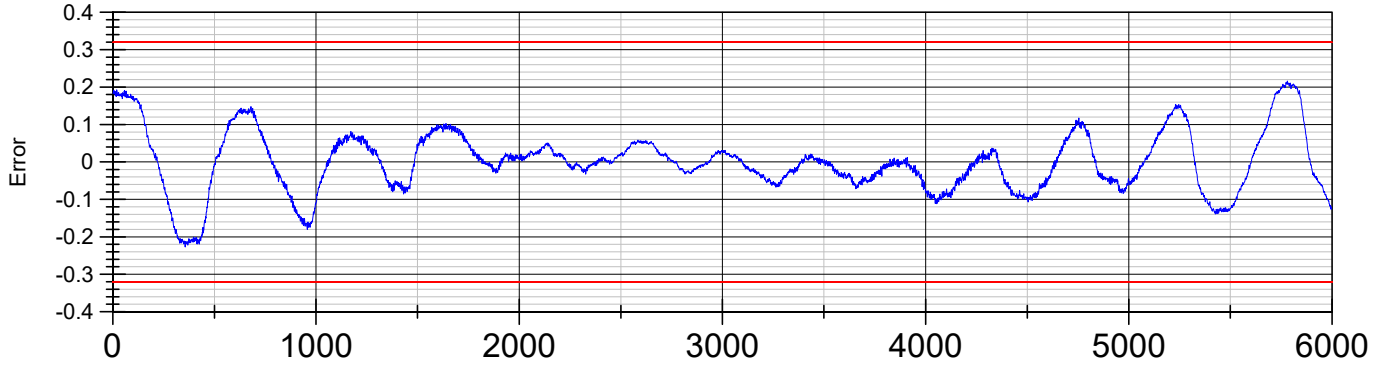

load_max_error	0.23 Nm
load max Error - Limit	-0.32 to 0.32 Nm
load_max_error_neg	0.23 Nm
load max Error neg - Limit	-0.32 to 0.32 Nm

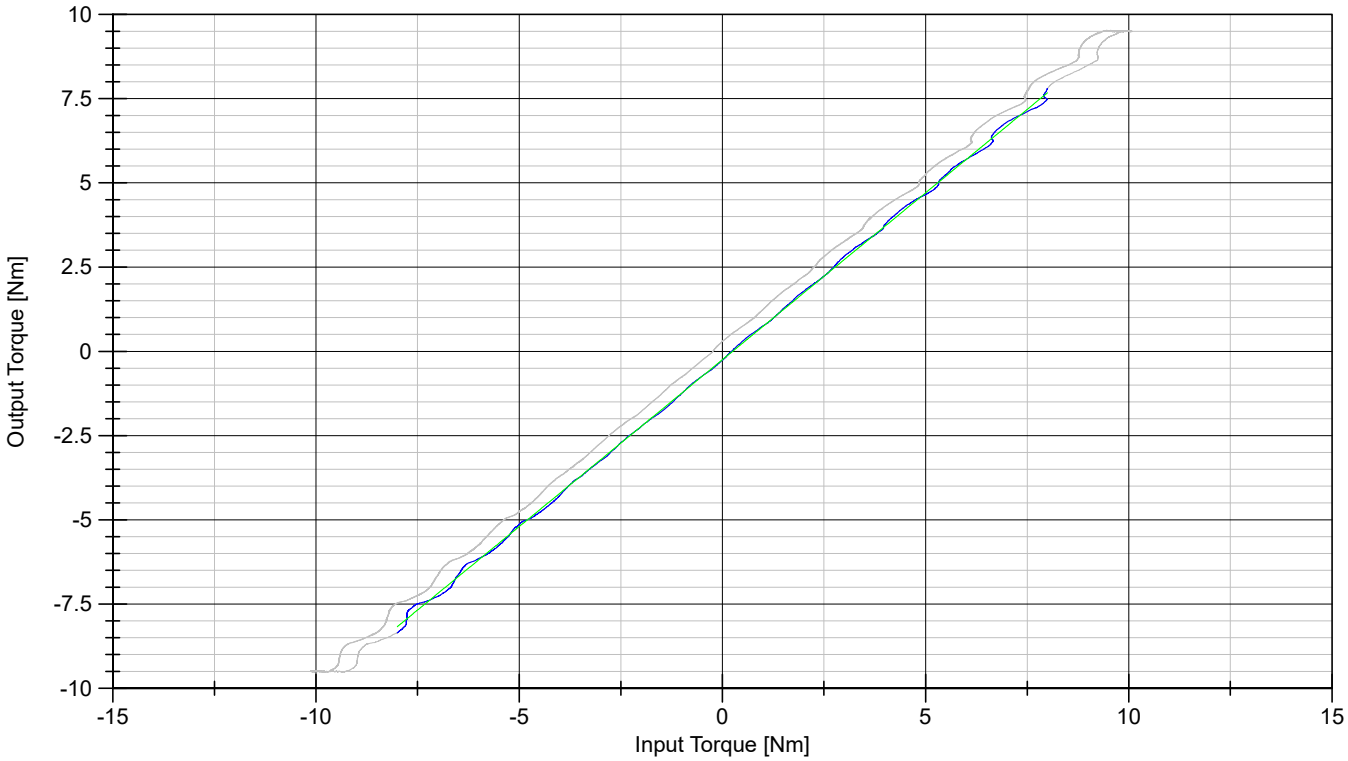

887
TK-P Testlab

thyssenkrupp

3.1.3Torque_Mode1 (7.1.3 Accuracy System Output (TorqueControl) W2W - only HWA)

Customer: HONDA
Project name: SbW HONDA GlobalBEV HWA NAFTA
Order:
ID number: HA-B05-HWA028
Remark: HWA

BeeCoreId: 654310
Drawing number: 2105910-020PT-A
Part description: HWA
Reason for test: 010_Aufbau
Production code / time: /

Business Unit: PCE
Insp. name: diepau
Date: 13.02.2024 14:52:27

CONFIDENTIAL

Machine:	887
Plant:	TK-P
Samplerate:	5000
StatLink:	
EvaluationID:	66
LimitID:	30
Functionlist:	3.1.3 Accuracy of System Output (Torque Control)
fbInstanceName	MAIN.fbMachine.fbPositionProfile
fbKrParAxisIn	Axis_In
fbKrParAxisInActualLoad	Axis_In_Load
fbKrParEnvelopeDeltaX	0.0
fbKrParEnvelopeDeltaY	0.0
fbKrParInputLoadLimit	60.0
fbKrParProfileColumnName	Position
fbKrParProfileFrequency	0.0098
fbKrParProfileGain	1.0
fbKrParProfileOffset	0.0
fbKrParProfilePath	HONDA\SbW\W2WHWA\313_Torque\313_Torque_Mode1.b64
fbKrParProfileRampUpGradient	30.0
fbKrParSetCycles	1.0
fbKrRefActCycles	0.0
fbKrRefControllerFFKd	0.0
fbKrRefControllerFFKp	0.0
fbKrRefControllerKi	0.0
fbKrRefControllerKp	0.0
Temperature:	23.0 °C
Humidity:	50.0 %